


APPROXIMATE ROUTING OF SERVICE
SECONDARY UNDERGROUND CONDUCTORS
FOR FIRE PUMP. REFER TO TRENCH
SECTION DETAIL "5" ON DRAWING #ES.02C.



**NOT FOR
CONSTRUCTION**

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BA
DESIGN DEVELOPMENT	03.05.26	BA

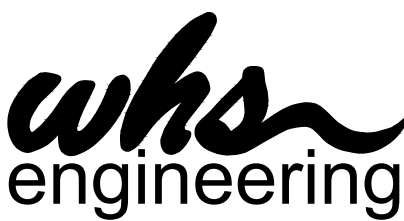

2012 West 25th Street, Suite 90
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

**3455 W. Dublin Granville Rd,
Columbus OH, 43235**

Drawing Title


**BUILDING B SITE
ELECTRICAL PLAN**

Date	Project Number
03.05.2026	24-065
Drawn by	Drawing Number
DJS	
Checked by	
KDS	
Approved	ES.01E
GSS	

Seal

**NOT FOR
CONSTRUCTION**

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BA
DESIGN DEVELOPMENT	03.05.26	BA

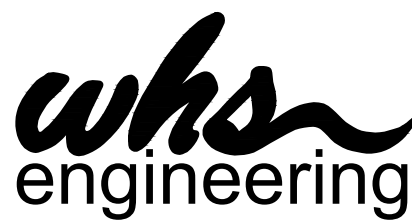This is a blank sheet of white paper with horizontal blue or grey ruling lines, typical of notebook paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

2012 West 25th Street, Suite 90
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

**3455 W. Dublin Granville Rd,
Columbus OH, 43235**

Drawing Title

**BUILDING B SITE
ELECTRICAL DETAILS**

Date	Project Number
03.05.2026	24-065
Drawn by	Drawing Number
DJS	
Checked by	
KDS	ES.021
Approved	
GSS	


ES.02B

LUMINAIRE SCHEDULE

TYPE	LAMP	WATTAGE	VOLTAGE	DIMMING TYPE	DESCRIPTION	CATALOG NUMBER	EQUIVALENT MANUFACTURER/REMARKS
D-1			120		LED DOWNLIGHT USED IN CLUBROOM.		
D-1A			120		LED DOWNLIGHT USED IN FIRST FLOOR CORRIDOR.		
D-2			120		LED DOWNLIGHT USED THROUGHOUT THE BUILDINGS.		
D-4			120		LED DOWNLIGHT USED IN CLUBROOM.		
D-5			120		LED DOWNLIGHT USED IN OUTDOOR CORRIDOR.		
D-6			120		LED DOWNLIGHT USED IN CORRIDORS.		
ESC-2			120		LED EXTERIOR LIGHT.		
S-2			120		LED STRING LIGHT USED IN CLUBROOM.		
S-3			120		LED SQUARE LIGHT USED IN CORRIDOR.		
S-4			120		LED LIGHT USED IN PUBLIC BATHROOMS.		
P-1			120		LED SPHERE LIGHT USED IN CLUBROOM AND LOBBY AREA.		
P-6			120		LED STRIP LIGHT USED IN FITNESS AREA.		
P-7			120		LED STRIP LIGHT USED IN FITNESS AREA.		
P-8			120		LED STRING LIGHT USED ABOVE FITNESS AREA.		
SM-2			120		LED FIXTURE USED IN OFFICES.		
SM-3			120		LED FIXTURE USED IN PUBLIC BATHROOMS.		
U-1			120		LED STRIP LIGHT USED IN HOUSE AREAS.		
U-2			120		LED STRIP LIGHT USED IN STAIRWAYS, WITH ON-FIXTURE MOTION SENSOR.		
WS-1			120		LED SQUARE LIGHT USED IN CORRIDORS.		
X1							
X2							
X3							

LUMINAIRE SCHEDULE GENERAL NOTES:

- VERIFY ALL LUMINAIRE COLORS, TRIMS, LENGTHS, ETC. WITH THE ARCHITECT/OWNER/DEVELOPER/DESIGNER PRIOR TO PLACING FINAL PURCHASE ORDERS. SUBMISSION OF SHOP DRAWINGS WILL BE INTERPRETED AS HAVING BEEN COORDINATED WITH THE AFOREMENTIONED PARTIES.
- PROVIDE ALL LENGTHS, FEEDS, ACCESSORIES, CONNECTORS, WIRING, POWER SUPPLIES, DRIVERS, ETC. FOR A COMPLETE INSTALLATION. VERIFY THE COMPLETE BILL OF MATERIAL WITH MANUFACTURER'S REPRESENTATIVE AND ENSURE ALL EQUIPMENT IS INCLUDED IN BID PRICE. COORDINATE INSTALLATION WITH ARCHITECTURAL DETAILS.
- VERIFY FINAL LUMINAIRE LOCATIONS WITH OTHER CEILING MOUNTED EQUIPMENT SUCH AS DIFFUSERS, FIRE ALARM DEVICES, SPEAKERS, ETC., WITH ARCHITECTURAL REFLECTED CEILING PLANS.
- VERIFY EXACT MOUNTING HEIGHT AND LOCATIONS OF ALL WALL MOUNTED AND PENDANT MOUNTED LUMINAIRES WITH ARCHITECTURAL PLANS AND ELEVATIONS PRIOR TO ROUGH-IN.
- ANY PROPOSED ALTERNATE LUMINAIRES SHALL BE APPROVED BY THE ARCHITECT/OWNER/DEVELOPER/DESIGNER PRIOR TO FINAL BID PRICING.
- SHOULD THE CONTRACTOR PROPOSE TO FURNISH MATERIALS, EQUIPMENT, AND DEVICES, OTHER THAN THOSE SPECIFIED AND LISTED, THE CONTRACTOR SHALL SUBMIT A WRITTEN REQUEST FOR SUBSTITUTIONS, TO THE ENGINEER AT LEAST TEN (10) BUSINESS DAYS PRIOR TO BID OPENING. THE REQUEST SHALL BE AN ALTERNATE TO THE ORIGINAL BID AND SHALL INCLUDE A COMPLETE SPECIFICATIONS CUT SHEET SUBMITTAL AS OUTLINED IN THE SPECIFICATIONS, COMPLETE WITH DESCRIPTIVE (MANUFACTURER, BRAND NAME, CATALOG NUMBER, ETC.) AND TECHNICAL DATA FOR ALL ITEMS. INDICATE ANY ADDITIONS OR DEDUCTIONS TO THE CONTRACT PRICE WITH THE SUBSTITUTION SUBMITTAL AND ON THE BID FORM.
- ANY FINAL SELECTED/INSTALLED LIGHT FIXTURES WITHOUT A SPECIFICATION (OR TO BE SPECIFIED LATER BY ARCHITECT/OWNER/DEVELOPER/DESIGNER) LISTED IN THIS SCHEDULE SHALL NOT EXCEED THE WATTAGE LISTED, SHALL NOT HAVE A LOWERED DELIVERED LUMENS (IF LISTED), AND SHALL MATCH THE COLOR TEMPERATURE (IF LISTED).

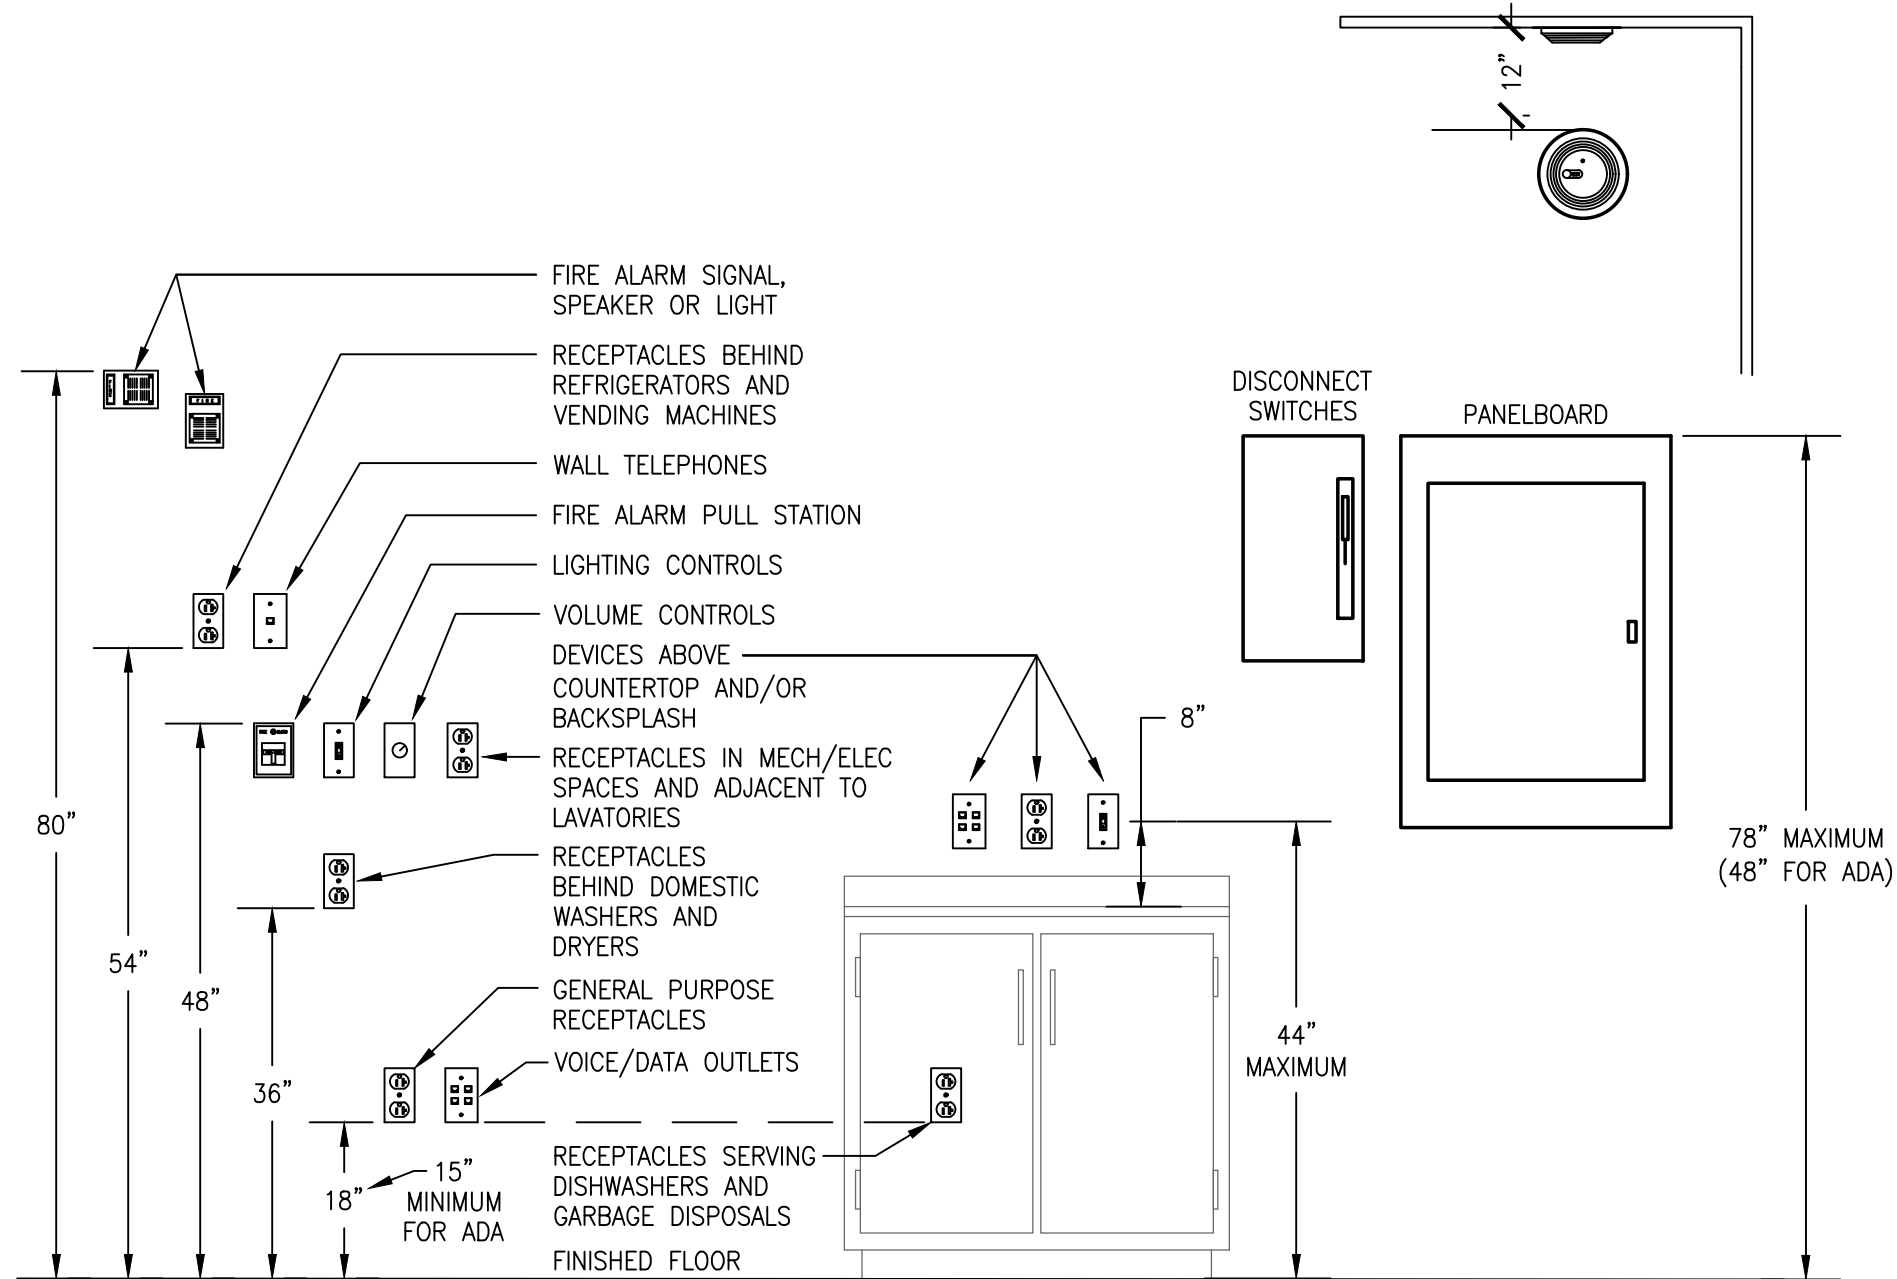

TYPICAL DEVICE MOUNTING DETAIL
NO SCALE

TYPICAL DEVICE MOUNTING DETAIL GENERAL NOTES:

- ALL MOUNTING HEIGHTS SHALL BE MEASURED FROM FINISHED FLOOR TO THE CENTERLINE OF DEVICE EXCEPT FIRE ALARM A/V DEVICES.
- NO WIRING DEVICES OR OUTLET BOXES SHALL BE MOUNTED BACK TO BACK.
- ALL MOUNTING DEVICES SHALL BE INSTALLED AT MOUNTING HEIGHTS AS INDICATED ON THIS DETAIL UNLESS OTHERWISE NOTED.
- FOR ALL ELEVATIONS (WHERE APPLICABLE), CASEWORK DETAILS, FIRE WALLS, SMOKE WALLS, LOCATION OF COUNTERTOP RECEPTACLES, LIGHTING FIXTURE SWITCHES, TELEPHONE ROUGH-INS, HEADWALLS, ETC., SEE ARCH DRAWINGS. WHERE NO ARCHITECTURAL ELEVATIONS OR DETAILS OCCUR, THE ELECTRICAL CONTRACTOR SHALL USE MEANS AND METHODS AS WELL AS THEIR FIELD KNOWLEDGE TO SPOT DEVICES IN THE BEST LOCATIONS FOR THE PROJECT.

ELEVATOR INSTALLATION GENERAL CONSTRUCTION NOTES

- INCLUDE EXTERNALLY OPERABLE SHUNT TRIP CIRCUIT BREAKERS CAPABLE OF BEING LOCKED IN THE "OFF" POSITION FOR ELEVATOR 3-PHASE POWER FEED (NEC 620.51). PROVIDE WIRING FROM THE FIRE ALARM SYSTEM TO THE CIRCUIT BREAKER FOR SHUNT TRIP ACTIVATION UPON OPERATION OF THE ELEVATOR CONTROL HEAT DETECTORS, UNLESS OTHERWISE DIRECTED BY LOCAL ELEVATOR INSPECTOR (ASME A17.1-102 AND NEC 620.51(b)). ROUTE 120V WIRING THROUGH FIRE ALARM CONTROL PANEL TO MONITOR LOSS OF SHUNT TRIP POWER (TROUBLE ONLY INDICATION). IF BATTERY POWERED LOWERING IS SPECIFIED BY THE ARCHITECT, PROVIDE A NORMALLY CLOSED CONTACT AND WIRING TO ELEVATOR CONTROLLER TO DISCONNECT ADDITIONAL POWER SOURCE (NEC 620.91(C)).
- INCLUDE 4-PAIR UNSHIELDED TWISTED PAIR CABLE, MINIMUM-CATEGORY 3 FROM CONTROLLER TO NEAREST AVAILABLE TELEPHONE SERVICES FOR CAR EMERGENCY PHONE/INTERCOM (ANSI A-17.1 - 211). COORDINATE EXACT LOCATION OF TELEPHONE SERVICES. **TYPICAL OF EACH ELEVATOR.**
- INCLUDE FUSIBLE DISCONNECT OR EXTERNALLY OPERABLE CIRCUIT BREAKER CAPABLE OF BEING LOCKED IN THE "OFF" POSITION FOR 120 VOLT SINGLE PHASE FEED (NEC 620.53). PROVIDE A SECOND SWITCH IF A BRANCH CIRCUIT FOR A HEATING OR AIR CONDITIONING POWER SUPPLY IS PROVIDED (NEC 620.54). **TYPICAL OF EACH ELEVATOR.**
- INCLUDE DEDICATED 20 AMP, 120 VOLT BRANCH CIRCUIT ON FOR CAR LIGHTS, RECEPTACLES, AUXILIARY LIGHTING SOURCE AND VENTILATOR (NEC 620.22). PROVIDE A SECOND SWITCH IF A BRANCH CIRCUIT FOR A HEATING OR AIR CONDITIONING POWER SUPPLY IS PROVIDED (NEC 620.22). **TYPICAL OF EACH ELEVATOR.**
- INCLUDE WEATHERPROOF DUPLEX RECEPTACLE - (FOR ELEVATOR SERVICING) AND SWITCH FOR LIGHTS. COORDINATE LOCATION IN FIELD WITH ELEVATOR INSTALLER.
- INCLUDE SMOKE DETECTOR WITH AUXILIARY CONTACTS FOR ELEVATOR RECALL - LOCATE OUTSIDE EACH ELEVATOR LANDING, AT TOP AND BOTTOM OF THE HOISTWAY (2 FEET ABOVE FLOOR) AND IN THE MACHINE ROOM (ANSI A-17.1 - 211.3b).
- INCLUDE FIXED TEMPERATURE HEAT DETECTOR AT SETTING LESS THAN SPRINKLER HEAD TO BE MOUNTED ADJACENT TO HEAD. HEAT DETECTORS SHALL INITIATE AN AUTOMATIC POWER SHUTDOWN FOR 3-PHASE POWER TO THE ELEVATOR CONTROLLER, UNLESS OTHERWISE DIRECTED BY THE LOCAL ELEVATOR INSPECTOR. LOCATE HEAT DETECTORS IN THE MACHINE ROOM, AT THE TOP OF THE SHAFT AND AT THE BOTTOM OF THE SHAFT (2 FEET ABOVE THE FLOOR).

GENERAL ELECTRICAL NOTES

- ANY AND ALL "BUILDING STANDARDS" AND/OR "BUILDING SPECIFICATIONS" SHALL BE CONSIDERED AN INTEGRAL PART OF THESE DOCUMENTS AND THE CONTRACTOR SHALL BE RESPONSIBLE TO OBTAIN A COPY OF THESE REQUIREMENTS/THIS DOCUMENT AND COMPLY WITH ALL REQUIREMENTS AND STANDARDS CONTAINED WITHIN.
- THESE DRAWINGS ARE GENERALLY DIAGRAMMATIC AND ARE INTENDED TO CONVEY THE SCOPE OF WORK AND INDICATE GENERAL ARRANGEMENT OF LIGHTING FIXTURES, DEVICES, CONTROLS, ELECTRICAL FIXTURES, MOTORS, PANELBOARDS, EQUIPMENT, ETC. THE LOCATIONS OF ALL ITEMS SHOWN ON THESE DRAWINGS OR CALLED FOR IN THE SPECIFICATIONS THAT ARE NOT DEFINITELY FIXED BY DIMENSIONS ARE APPROXIMATE. THE EXACT LOCATIONS NECESSARY TO SECURE THE BEST CONDITIONS AND RESULTS MUST BE DETERMINED AT THE PROJECT. ALL LOCATIONS OF WORK EXPOSED TO VIEW ARE SUBJECT TO APPROVAL OF THE ARCHITECT PRIOR TO INSTALLATION.
- THE ELECTRICAL CONTRACTOR SHALL VERIFY EXISTING CONDITIONS TO ENSURE THAT ALL NEW WORK WILL FIT INTO THE EXISTING STRUCTURE IN THE MANNER INTENDED AND AS SHOWN ON THE DRAWINGS. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT/OWNERS REPRESENTATIVE PRIOR TO ANY ROUGH-INS, FABRICATIONS, OR PERFORMING ANY WORK IN THE AREA INVOLVING DIFFERENCES. NOTIFICATION SHALL BE IN THE FORM OF A DRAWING OR SKETCH INDICATING FIELD MEASUREMENTS AND NOTES RELATED TO THE AREA.
- ANY DISCREPANCIES BETWEEN DRAWINGS AND SPECIFICATIONS SHALL BE PROMPTLY BROUGHT TO THE ATTENTION OF THE ENGINEER FOR CLARIFICATION DURING THE BIDDING PERIOD. NO ALLOWANCE SHALL SUBSEQUENTLY BE MADE TO THE CONTRACTOR BY REASON OF THEIR FAILURE TO HAVE BROUGHT SAID DISCREPANCIES TO THE ATTENTION OF THE ENGINEER DURING THE BIDDING PERIOD OR OF ANY ERROR ON THE CONTRACTOR'S PART.
- ALL EQUIPMENT SHALL BE INSTALLED IN A NEAT, PROFESSIONAL AND WORKMANLIKE MANNER, RECTILINEAR TO BUILDING STRUCTURE.
- ALL COMPONENTS SHOWN ON THE RISER/ONE-LINE DIAGRAMS, BUT NOT ON THE PLAN OR VICE VERSA, SHALL BE INCLUDED AS IF SHOWN ON BOTH.
- REVIEW ALL TRADES' CONTRACT DOCUMENTS TO DETERMINE SPECIFIC MOUNTING LOCATIONS FOR ELECTRICAL EQUIPMENT. COORDINATE EXACT MOUNTING LOCATIONS WITH THE ARCHITECT.
- REFER TO ARCHITECTURAL ELEVATIONS TO DETERMINE EXACT LOCATIONS OF ALL RECEPTACLES, OUTLETS/JACKS, SWITCHES, ETC. LUMINAIRES AND CEILING MOUNTED EQUIPMENT SHALL BE COORDINATED WITH THE ARCHITECTURAL REFLECTED CEILING PLANS.
- EXACT LOCATION OF MECHANICAL EQUIPMENT THAT REQUIRE ELECTRICAL CONNECTION ARE SHOWN ON THE MECHANICAL DRAWINGS. FIELD VERIFY EXACT LOCATIONS WITH MECHANICAL CONTRACTOR PRIOR TO ANY ROUGH-INS.
- ALL RACEWAY/CIRCUITING SHALL BE RUN CONCEALED UNLESS SPECIFIED OTHERWISE. CUT/FISH/PATCH WALLS AS REQUIRED. USE OF SURFACE RACEWAY MUST BE APPROVED BY ARCHITECT ALONG WITH PROPOSED ROUTING AND SURFACE RACEWAY TYPE.
- ALL RACEWAYS RUNNING THROUGH BUILDING EXPANSION JOINTS SHALL BE EQUIPPED WITH EXPANSION FITTINGS.
- CONDUIT HOME RUNS SHOWN ON THE DRAWING WITH MORE THAN (3) CURRENT CARRYING CONDUCTORS ARE SHOWN DIAGRAMMATICALLY. THIS CONTRACTOR SHALL NOT INSTALL MORE THAN (3) CURRENT CARRYING CONDUCTORS IN A RACEWAY UNLESS NATIONAL ELECTRICAL CODE (N.E.C.), ARTICLE 310.15 DERATING FACTORS ARE APPLIED.
- ALL LIGHTING AND GENERAL POWER BRANCH CIRCUITS SHALL INCLUDE A SEPARATE NEUTRAL CONDUCTOR, UNLESS SPECIFICALLY NOTED OTHERWISE.
- THE ELECTRICAL CONTRACTOR SHALL REFER TO THE ELECTRICAL SPECIFICATIONS FOR ACCEPTABLE CONDUIT TYPES/LOCATIONS. ALL CONDUIT SIZES ON THE DRAWINGS ARE BASED ON THE LATEST EDITION OF THE N.E.C. CONDUIT FILL TABLES FOR ELECTRICAL METALLIC TUBING (E.M.T.). CONDUIT SIZES SHALL BE REVISED TO THE SIZE REQUIRED, RELATIVE TO THE ACTUAL CONDUIT TYPE TO BE INSTALLED.
- IT IS NOT INTENDED THAT THE PLANS INDICATE ALL THE NECESSARY BENDS, OFFSETS, PULL BOXES AND OBSTRUCTIONS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO INSTALL THEIR WORK TO CONFORM TO THE STRUCTURE, MAINTAIN HEADROOM AND KEEP OPENINGS AND PASSAGEWAYS CLEAR. REFER TO THE ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONS AS REQUIRED.
- IT IS NOT INTENDED THAT THE PLANS INDICATE ALL CONDUIT ROUTES, PULL BOXES, ETC. CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING ACTUAL CONDUIT ROUTING, QUANTITY AND LOCATION OF PULL BOXES WITHIN ACCESSIBLE LOCATIONS.
- PROVIDE SCREW-COVER PULL BOXES IN CONDUIT RUNS AS REQUIRED TO LIMIT THE NUMBER OF BENDS TO NO MORE THAN THREE (3) OR 270 DEGREES TOTAL. SIZE PULL BOXES IN ACCORDANCE WITH NEC, ARTICLE 314.28. DOCUMENT ON RECORD DRAWINGS, SIZE AND LOCATION OF PULL BOXES USED IN FEEDER CONDUIT RUNS.
- ALL OUTLET BOXES IN WALLS SHALL HAVE A MINIMUM OF ONE (1) DEDICATED VERTICAL CONDUIT ENTERING AT THE TOP OF THE BOX. HORIZONTAL CONDUIT CONNECTIONS SHALL ONLY BE PERMITTED UNDER WINDOWS OR UNLESS OTHERWISE NOTED ON DRAWINGS.
- WHERE MULTIPLE DEVICES ARE INDICATED IN A COMMON LOCATION, GANG INTO A SINGLE COVER PLATE.
- NEW OR MODIFIED PANELS SHALL BE PROVIDED WITH ENGRAVED NAMEPLATES AS DESIGNATED ON PANEL SCHEDULES SECURED TO PANEL FACE AND DENOTING ORIGIN OF FEEDER FROM WHICH PANEL IS SERVED.

SYMBOL LEGEND

SYMBOL	DESCRIPTION
	LUMINAIRE. "A" INDICATES TYPE; "A" INDICATES SWITCH CONTROL. "/EM" INDICATES LUMINAIRE HAS INTEGRAL 90-MINUTE EMERGENCY BATTERY DRIVER.
	LUMINAIRE WIRED FOR 24 HOUR OPERATION, INDICATED WITH HATCH AND A "/NL" DESIGNATION.
	SELF CONTAINED LED UNIVERSAL MOUNTED "EXIT" SIGN. PROVIDE QUANTITY OF FACES AND DIRECTIONAL ARROWS AS INDICATED ON FLOOR PLANS. REFER TO LUMINAIRE SCHEDULE FOR ADDITIONAL INFORMATION.
	EMERGENCY LIGHTING BATTERY UNIT WITH HEADS AS INDICATED. REFER TO LUMINAIRE SCHEDULE FOR ADDITIONAL INFORMATION.
	LIGHT SWITCH, SINGLE POLE; 20 AMPERE, 120/277 VOLT, 1HP. "X" INDICATES SWITCH CONTROL. "X" INDICATES THE FOLLOWING: "S" CONTROL OF SPECIFIED LUMINAIRES. "3" THREE-WAY TYPE. "4" FOUR-WAY TYPE. "D" SWITCH TO BE WIRED AHEAD OF DOWNSTREAM LINE VOLTAGE WALLBOX TYPE DIMMING SWITCH, INDICATED BY THE SAME SWITCH CONTROL TAG. "2P" DOUBLE POLE TYPE. "TM" PROGRAMMABLE TIMER SWITCH, TYPICALLY HONEYWELL #RPLS730B. "OS" LINE VOLTAGE MULTI-TECHNOLOGY WALL SWITCH OCCUPANCY SENSOR WITH MANUAL ON/OFF SWITCH. REFER TO DIAGRAM ON DRAWING ### . "VS" LINE VOLTAGE MULTI-TECHNOLOGY WALL SWITCH VACANCY SENSOR WITH MANUAL ON/OFF SWITCH. REFER TO DIAGRAM ON DRAWING ### . "COS" LINE VOLTAGE PIR WALL SWITCH CORRIDOR-TYPE OCCUPANCY SENSOR WITHOUT CONTROL SWITCH, TYPICALLY SENSOR SWITCH #HWR13-SN SERIES. MOUNT AT 7'-0" A.F.F. UNLESS OTHERWISE SHOWN. "CYS" LINE VOLTAGE PIR WALL SWITCH CORRIDOR-TYPE OCCUPANCY SENSOR WITH CONTROL SWITCH, TYPICALLY SENSOR SWITCH #HWR13 SERIES. MOUNT AT 7'-0" A.F.F. UNLESS OTHERWISE SHOWN. "VDS" LINE VOLTAGE ON/OFF SWITCH WITH DIMMER FUNCTION AND VACANCY SENSOR. REFER TO DIAGRAM ON DRAWING ### . "LV" LOW VOLTAGE ON/OFF SWITCH. "LV2" DUAL ZONE LOW VOLTAGE ON/OFF SWITCH. "LV4" QUAD ZONE LOW VOLTAGE ON/OFF SWITCH. "LVD" LOW VOLTAGE ON/OFF SWITCH WITH DIMMER FUNCTION. "LVD2" DUAL ZONE LOW VOLTAGE ON/OFF SWITCH WITH DIMMER FUNCTION. "LVD4" QUAD ZONE LOW VOLTAGE ON/OFF SWITCH WITH DIMMER FUNCTION. "SCN" SCENE CONTROLLER CAPABLE OF A MINIMUM OF FOUR PRESETS.
	LINE VOLTAGE WALLBOX TYPE DIMMING SWITCH. COORDINATE DIMMING PROTOCOL OF THIS DIMMING SWITCH AND LIGHTING LOAD SERVED PRIOR TO PLACING PURCHASE ORDER. "S" INDICATES SWITCH CONTROL.
	120/277V RATED CEILING MOUNTED OCCUPANCY SENSOR. A "DR" DESIGNATIONS INDICATES A DUAL RELAY SENSOR FOR 3/4 WAY SWITCHING. "X" REPRESENTS CONTROLLED LIGHTING ZONE (IF LOCATED IN A ROOM/AREA WITH MULTIPLE LIGHTING ZONES). TYPICALLY SENSOR SWITCH #CMR SERIES.
	LOW VOLTAGE CEILING MOUNTED PHOTOSENSOR, "X" REPRESENTS CONTROLLED LIGHTING ZONE.
	LOW VOLTAGE MULTI-TECHNOLOGY CEILING MOUNTED OCCUPANCY SENSOR, "X" REPRESENTS CONTROLLED LIGHTING ZONE.
	LOW VOLTAGE MULTI-TECHNOLOGY CEILING MOUNTED VACANCY SENSOR, "X" REPRESENTS CONTROLLED LIGHTING ZONE.
	CIRCUITRY TURNING UP
	CIRCUITRY TURNING DOWN
	UNDERGROUND OR UNDERSLAB CONDUIT/RACEWAY AND/OR CIRCUITING.
	CONDUIT HOME RUN TO PANEL/CIRCUIT BREAKER AS INDICATED. ALL UNMARKED HOMERUNS TO CONTAIN 2-12 AWG AND IN 3/4" CONDUIT (MINIMUM), UNLESS NOTED OTHERWISE. SIZE CONDUIT AND PROVIDE JUNCTION BOXES PER CODE UNLESS OTHERWISE NOTED.
	DWELLING UNITS; DWELLING UNIT SINGLE-PHASE LOAD CENTER.
	ALL OTHER AREAS; BRANCH CIRCUIT PANELBOARD.
	DISCONNECT SWITCH. REFER TO EQUIPMENT SCHEDULE OR PLAN NOTE FOR FUSING NECESSITY, SIZES, RATINGS, ETC.
	DUPLEX RECEPTACLE - 125 VOLT, 20 AMPERE, 2 POLE, 3 WIRE, GROUNDING TYPE MOUNTED AT 18" AFF UNLESS NOTED OTHERWISE.
	DOUBLE DUPLEX RECEPTACLE - 125 VOLT, 20 AMPERE, 2 POLE, 3 WIRE, GROUNDING TYPE MOUNTED AT 18" AFF UNLESS NOTED OTHERWISE.
	GFCI GROUND TYPE DUPLEX RECEPTACLE - 125 VOLT, 20 AMPERE, 2 POLE, 3 WIRE, GROUNDING TYPE MOUNTED AT 18" AFF UNLESS NOTED OTHERWISE.
	DUPLEX RECEPTACLE - 125 VOLT, 20 AMPERE, 2 POLE, 3 WIRE, GROUNDING TYPE MOUNTED AT 18" AFF UNLESS NOTED OTHERWISE. RECEPTACLE SHALL BE SPLIT WIRED SUCH THAT TOP OUTLET TO BE WIRED FOR SWITCHING TO SWITCH INDICATED BY "S".
	TAMPER RESISTANT, POP-UP COUNTER RECEPTACLE - 125 VOLT, 20 AMPERE, 2 POLE, 3 WIRE, GROUNDING TYPE. TYPICALLY BRYANT #RGT220xx.
	FLOOR BOX WITH DUPLEX RECEPTACLE. PROVIDE APPROPRIATE BOX TYPE FOR CONCRETE OR WOOD FLOOR CONSTRUCTION.
	RECEPTACLE SYMBOL WITH ADDITIONAL SUBSCRIPT DESIGNATES TYPE OR SPECIFIC REQUIREMENTS AS FOLLOWS: "AC" INDICATES MOUNTED 8" ABOVE COUNTER UNLESS NOTED OTHERWISE ON ARCHITECTURAL ELEVATIONS. "CLG" FLUSH CEILING MOUNTED OR 12" ABOVE WINDOW. "AB" RECEPTACLE MOUNTED AT HEIGHT INDICATED. "IL" RECEPTACLE WITH ILLUMINATED NIGHT LIGHT. "VF" VERIFY EXISTING MOUNTING HEIGHT IN FIELD, OR CONFIRM EXACT LOCATION IN OF NEW DEVICE IN FIELD. "WP" WEATHERPROOF "WHILE-IN-USE" (HUBBELL #WP26M) COVER. "U" DUPLEX RECEPTACLE WITH ONE USB TYPE "A" PORT AND ONE TYPE "C" PORT, LEVITON #T5633 SERIES OR EQUAL. "T" TAMPER RESISTANT (ONLY INDICATED OUTSIDE OF DWELLING UNITS). "G" RECEPTACLE PROTECTED BY UPSTREAM GFCI OR GFI-TYPE BREAKER WITH "GFCI PROTECTED" LABEL ON THE FACE OF DEVICE. "CR" RECEPTACLE CONTROLLED BY AN AUTOMATIC CONTROL DEVICE FOR PLUG LOAD CONTROL. DURABLY AND PERMANENTLY MARKED WITH THE WORD "CONTROLLED" AND THE SYMBOL SHOWN IN NEC FIGURE #406.3(F) .
	SPECIAL PURPOSE RECEPTACLE. REFER TO EQUIPMENT SCHEDULE OR PLAN NOTE FOR RECEPTACLE TYPE AND RATINGS. COORDINATE EXACT NEMA CONFIGURATION WITH EQUIPMENT PRIOR TO ROUGH-IN.
	JUNCTION BOX - SIZE PER N.E.C. ARTICLE 314 REQUIREMENTS.
	ALL AREAS, BESIDES IN DWELLING UNITS; COMBINATION VOICE/DATA OUTLET (4" x 2-1/8" DEEP JUNCTION BOX) COMPLETE WITH SINGLE GANG MUD RING (VERIFY DRYWALL THICKNESS) AND COVER PLATE (COLOR SELECTION BY ARCHITECT) MOUNTED AT 18" A.F.F. PROVIDE 1-0" CONDUIT WITH INSULATING BUSHING AND PULLSTRING STUBBED UP 12" INTO ACCESSIBLE CEILING SPACE.
	WITHIN DWELLING UNITS; REFER TO TYPICAL APARTMENT DATA FACEPLATE DETAILS ON DRAWING ### .
	FLOOR BOX WITH DATA/VOICE OUTLET AS DESCRIBED ABOVE. PROVIDE APPROPRIATE BOX TYPE FOR CONCRETE OR WOOD FLOOR CONSTRUCTION.
	FIRE ALARM SYSTEM MANUAL PULL STATION.
	FIRE ALARM COMBINATION AUDIBLE/VISUAL (HORN/SROBE) SIGNALING DEVICE. LF DESIGNATION INDICATES LOW FREQUENCY ALARM DEVICE.
	FIRE ALARM VISUAL (STROBE) ONLY SIGNALING DEVICE.
	ALL AREAS, BESIDES IN DWELLING UNITS; FIRE ALARM SYSTEM SMOKE DETECTOR.
	WITHIN DWELLING UNITS; DWELLING UNIT SMOKE ALARM. REFER TO DETAIL(S) ON DRAWING ### .
	WITHIN DWELLING UNITS; BUILDING FIRE ALARM SYSTEM ADDRESSABLE SMOKE DETECTOR WITH 520HZ LOW FREQUENCY SOUNDER BASE.
	"CO" DESIGNATION INDICATES COMBINATION, "MULTI-CRITERIA" SMOKE/CARBON MONOXIDE CAPABILITY.
	FIRE ALARM CONTROL PANEL. THE BRANCH CIRCUIT SERVING THIS PANEL SHALL ONLY SERVE FIRE ALARM EQUIPMENT. REFER TO PANEL SCHEDULE(S).
	FIRE ALARM ANNUNCIATOR PANEL. THE BRANCH CIRCUIT SERVING THIS PANEL SHALL ONLY SERVE FIRE ALARM EQUIPMENT. REFER TO PANEL SCHEDULE(S).
	TAMPER SWITCH. COORDINATE ALL REQUIREMENTS WITH SPRINKLER/FIRE SUPPRESSION DRAWINGS.
	FLOW SWITCH. COORDINATE ALL REQUIREMENTS WITH SPRINKLER/FIRE SUPPRESSION DRAWINGS.
	MAGNETIC DOOR HOLD OPEN

WIRING SCHEDULE FOR 15/20A RECEPTACLE & LIGHTING CIRCUITS

DISTANCE	120V
1' - 100'	#12 (AWG)
100' - 150'	#10 (AWG)
150' - 200'	#10 (AWG)
200' - 300'	#8 (AWG)

NOT FOR CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

who engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

OSU AIRPORT WEST BUILDING B

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title

ELECTRICAL LEGEND AND DETAILS

Date:

03.05.2026

Project Number

24-065

Drawn By

DJS

Checking Number

KDS

Checked by

gss

Approved


gss

E0.03B

Seal

**NOT FOR
CONSTRUCTION**

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BA
DESIGN DEVELOPMENT	03.05.26	BA

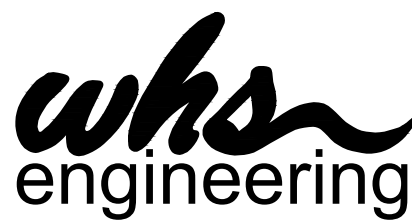[illegible]

2012 West 25th Street, Suite 90
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

**3455 W. Dublin Granville Rd,
Columbus OH, 43235**


ELECTRICAL SCHEDULE AND DETAILS

Date	Project Number
03.05.2026	24-065
Drawn by	Drawing Number
DJS	
Checked by	
KDS	E0.04P
Approved	
GSS	

FEEDER SCHEDULE				
TYPE	NOMINAL AMPACITY	CONDUCTOR & CONDUIT SIZE	CONDUCTOR MATERIAL	NOTES
1	20A	2#10, 1#10(G), 1-1/2" C.	COPPER	1,5
2	155A	4#3/0, 1#4(G), 2" C.	ALUMINUM	1,3
3	310A	4#500KCMIL, 3" C.	ALUMINUM	1,3
4	1020A	3 SETS OF 4#600KCMIL, 1#4(G), 4" C.	ALUMINUM	1,3
5	2695A	7 SETS OF 4#750KCMIL, 4" C.	ALUMINUM	1,2
FP1	85A	4#3, 1-1/2" C.	COPPER	1,2,5
FP2	85A	3#3, 1#8(G), 1-1/2" C.	COPPER	1,2,5
GN	85A	4#3, 1#8(G), 1-1/2" C.	COPPER	1,2,5
APT	120A (1&2 BED) 135A (3 BED)	3#1/0, 1#4(G), 1-1/2" C. (1&2 BED) 3#1/0, 1#4(G), 2" C. (3 BED)	ALUMINUM ALUMINUM	1,3,4 1,3,4
PC	-	TWO EMPTY 5" CONDUITS.	-	6

FEEDER SCHEDULE NOTES:

- ALL CONDUCTORS ARE BASED ON EITHER TYPE "TW"/"UF" (UNDER AND INCLUDING #1AWG) OR TYPE "THHW"/"THHN" (ON #1AWG) INSULATION WITH A 60°C RATING (UNDER AND INCLUDING #1AWG) OR A 75°C RATING (OVER #1AWG) IN ADDITION TO 75°C TERMINATIONS. CONDUIT SIZES ARE ALSO INDICATED.
- REFER TO RESPECTIVE TRENSION SECTION DETAIL ON SHEET #ES.02 FOR ADDITIONAL INFORMATION REGARDING THIS FEEDER.
- COPPER CONDUCTOR MAY BE UTILIZED FOR THIS FEEDER. HOWEVER, THE E.C. IS RESPONSIBLE FOR PROVIDING THE APPROPRIATE CONDUCTOR SIZE IN ACCORDANCE WITH N.E.C. TABLE #310.15(B)(16).
- TYPE SER CABLE FOR MAY BE UTILIZED FOR THIS FEEDER IN LIEU OF CONDUCTORS IN CONDUIT.
- THIS FEEDER IS SIZED TO ACCOUNT FOR VOLTAGE DROP (ALL FEEDS WITH THIS NOTE) **AND SHARED CONDUIT DERATING FACTOR (FOR FEEDER #1).**
- ROUTE TWO 5" CONDUITS TO LOCATION DETERMINED BY LOCAL UTILITY COMPANY.

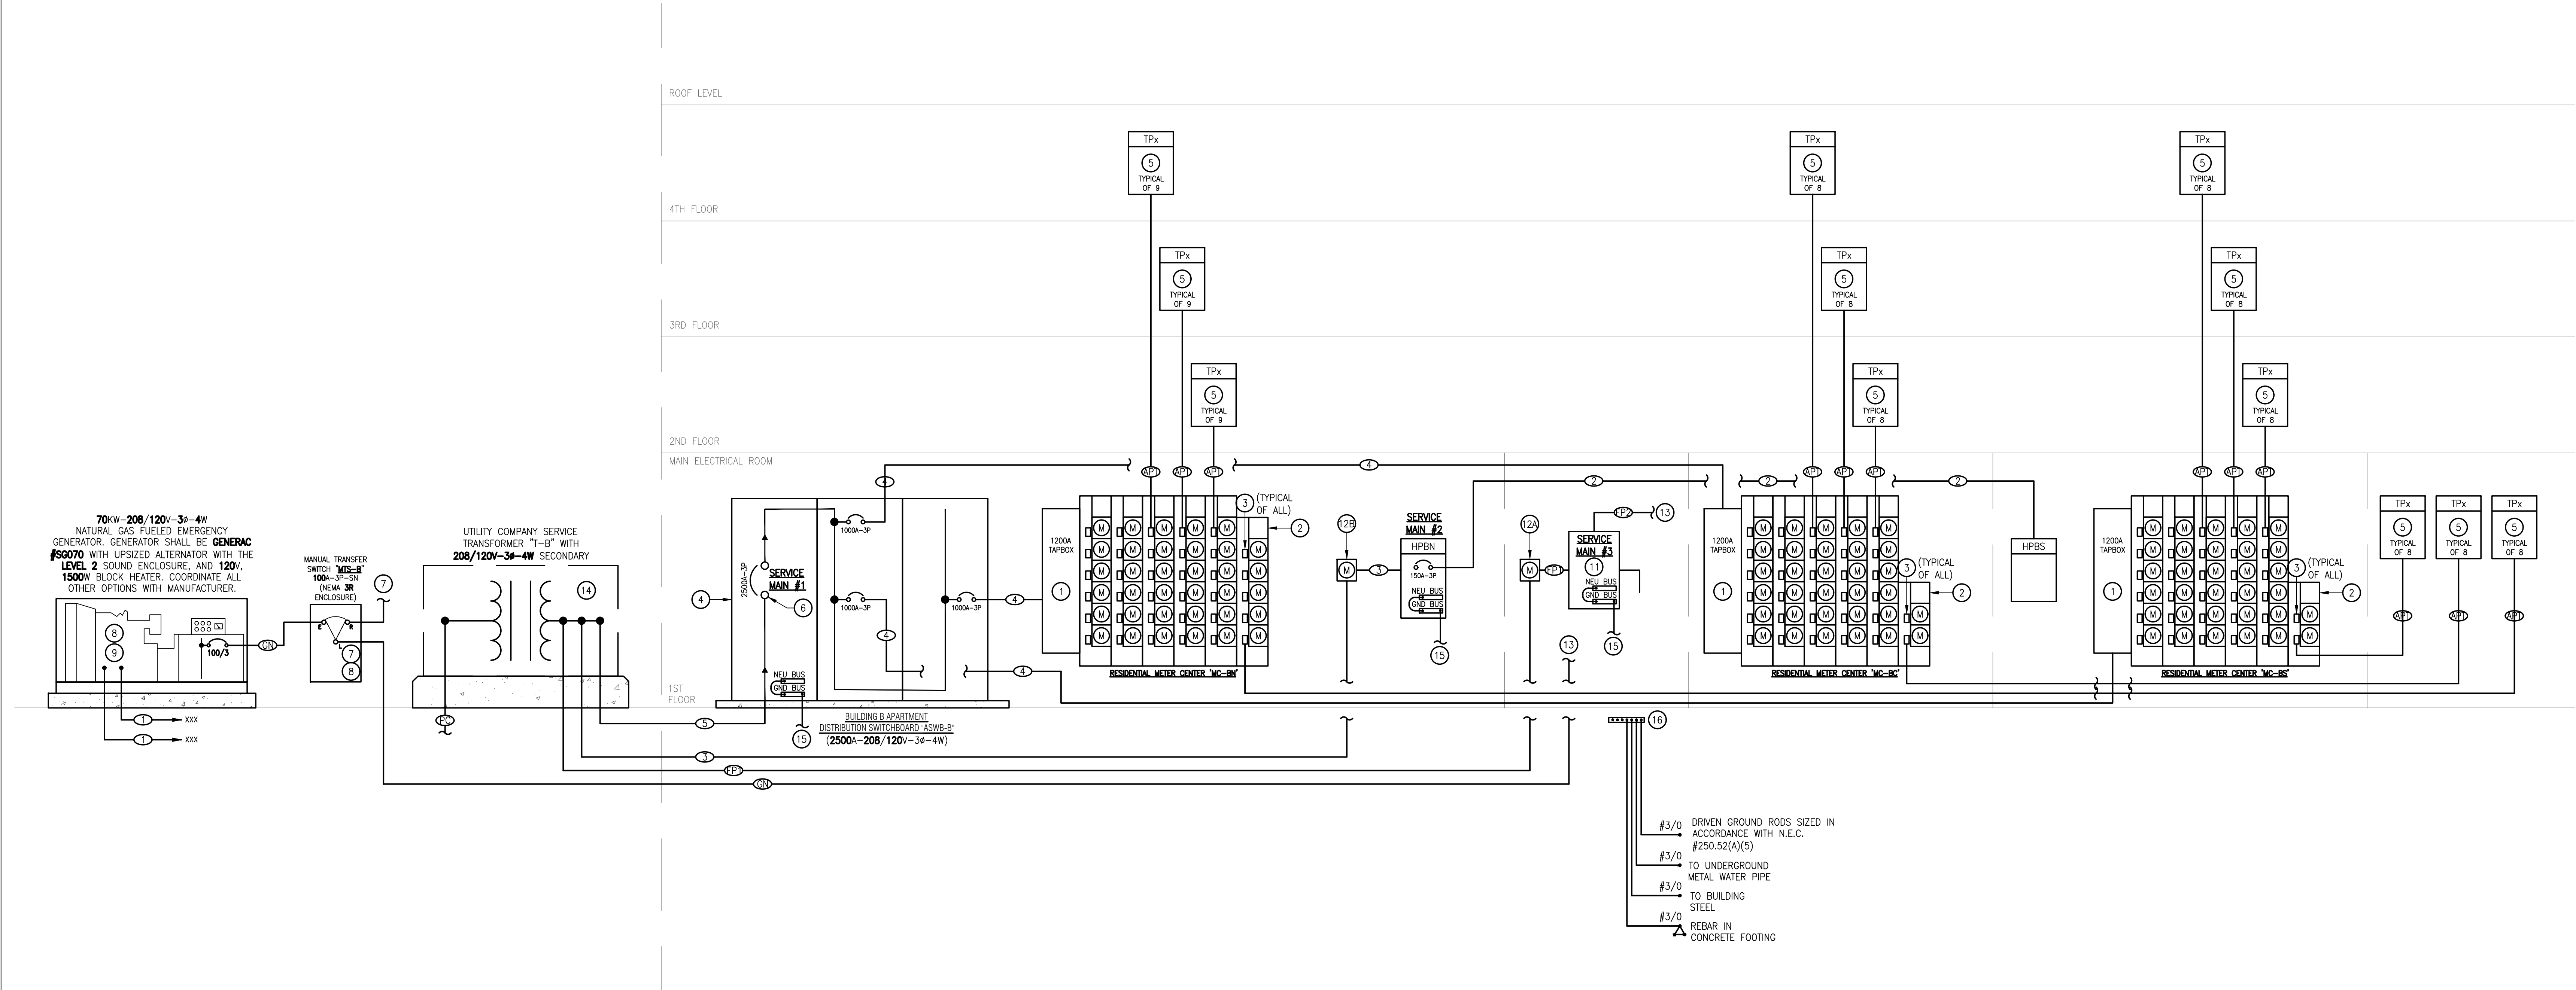

- # CODED NOTES
- 1 PROVIDE A U.L. LISTED, 1200MA CENTER TAPBOX RATED AT **260/120V-3W-4W**, TYPICALLY **SIEMENS #W7B** SERIES. ENTIRE ASSEMBLY SHALL BE RATED AT A MINIMUM **6500/120V-3W** SYMMETRICAL SHORT CIRCUIT RATING. ACCEPTABLE ALTERNATIVES SHALL BE EATON, SQUARE D, OR GENERAL ELECTRIC. HOWEVER, THE E.C. SHALL BE RESPONSIBLE FOR ENSURING MODIFIED EQUIPMENT, SIZES, ETC. MEET N.E.C. CLEARANCE CRITERIA.
 - 2 PROVIDE RESIDENTIAL METER STATION (**QUANTITY AS INDICATED**) WITH **THREE PHASE** HORIZONTAL BUS (**CAPACITY AS SHOWN**). PROVIDE **ONE** TYPICAL **SIEMENS #P4S-06** SERIES 60 AMPERE, 120V/240V, 3-POLE, 3-THROW **16.22"x4" 43.31"x14" 8.0"x0" (3" METER STACK)** AND **16.22"x4" 70.31"x14" 8.0"x0" (6" METER STACK)**, ACCEPTABLE ALTERNATIVES SHALL BE EATON, SQUARE D, OR GENERAL ELECTRIC, HOWEVER, THE E.C. SHALL BE RESPONSIBLE FOR ENSURING MODIFIED EQUIPMENT, SIZES, ETC. MEET N.E.C. CLEARANCE CRITERIA. METER STACK SHALL BE PROVIDED SUCH THAT NO CIRCUIT BREAKER SHALL EXCEED 6"-8" A.F.F. PROVIDE ALL REQUIRED HOUSEKEEPING PADS IN FRONT OF EQUIPMENT TO MEET THIS REQUIREMENT. COORDINATE ALL METER SOCKET REQUIREMENTS WITH LOCAL UTILITY COMPANY. ENTIRE ENCLOSURE SHALL BE RATED AT A MINIMUM **6500/120V-3W** SYMMETRICAL SHORT CIRCUIT AMPIERS.
 - 3 LOCATION OF 125A-200A ONE AND TWO BEDROOM APARTMENT UNITS) AND **150A-200** (THREE BEDROOM APARTMENT UNITS) TYPICAL METER STATION SHALL BE PROVIDED WITH METER STACK. REFER TO UNIT LOAD CALCULATIONS ON DRAWING: **\$E3.00C**. ALL MAIN CIRCUIT BREAKERS SHALL BE RATED AT A MINIMUM **100,000 RMS** SYMMETRICAL SHORT CIRCUIT AMPIERS.
 - 4 PROVIDE A U.L. LISTED "SERVICE ENTRANCE RATED" (RATINGS AS INDICATED ON RISER) DISTRIBUTION SWITCHBOARD, TYPICALLY **SIEMENS #B82** SERIES. ASSEMBLY SHALL BE RATED AT A MINIMUM 100,000 RMS SYMMETRICAL SHORT CIRCUIT AMPIERS. SHORT CIRCUIT BREAKER SHALL BE PROVIDED WITH METER STACK. PROVIDE FOR UTILITY COMPANY METERING COMPLYING WITH LOCAL UTILITY COMPANY REQUIREMENTS AND SHALL INCLUDE A **SIEMENS #TPS4-06** SERIES SURGE PROTECTION DEVICE OR EQUAL BY OTHERS, AND A **#PAC4220** METERING/MONITORING DEVICE. PROVIDE CONCRETE PAD IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
 - 5 TYPICAL QUEST SUITE LOAD CENTER "GSS", TYPICALLY **SIEMENS #S5** SERIES. REFER TO TYPICAL PANEL SCHEDULES ON DRAWING **\$E3.00C** FOR GUEST UNIT SERVICE CALCULATIONS, PANEL SIZES AND BREAKERS, AND OTHER ADDITIONAL INFORMATION. PROVIDE A TYPE 2 SURGE PROTECTIVE DEVICE (SPD) AND INSTALL EACH LOAD CENTER IN ACCORDANCE WITH NEC #215.18, TYPICALLY **SIEMENS #SPS2-2-A-06S** OR EQUAL BY OTHERS. THE KVAIC RATING OF THE SPD SHALL NOT BE LESS THAN THE RATING OF THE LOAD CENTER AS SHOWN ON THE PANEL SCHEDULE.
 - 6 PROVIDE ARC FAULT REDUCTION IN ACCORDANCE WITH N.E.C. ARTICLE **\$240.87**.
 - 7 GCM LOCK CONNECTION FOR REDUNDANT TEMPORARY MANAGEMENT GENERATOR LOCATED ON MANUAL TRANSFER SWITCH.
 - 8 PRIOR TO ORDERING EQUIPMENT, PROVIDE SELECTIVE COORDINATION STUDY FOR EMERGENCY SYSTEM PER NEC #700.32, CIRCUIT BREAKERS IN PANEL SHALL BE COORDINATED WITH ALL UPSTREAM OVERCURRENT PROTECTIVE DEVICES.
 - 9 THE EMERGENCY STANDBY GENERATOR MUST BE U.L. LISTED IN ACCORDANCE WITH U.L. #2200. PROVIDE A **20A-120V-16** BRANCH CIRCUIT FOR SERVICE TO BATTERY CHARGER AND A **20A-120V-16** BRANCH CIRCUIT FOR SERVICE TO GENERATOR BLOCK HEATER. CONNECT PER MANUFACTURER'S WIRING DIAGRAM.
 - 10 PROVIDE ALL EQUIPMENT, ACCESSORIES, WIRING, ETC. IN COMPLIANCE WITH N.E.C. ARTICLE **\$700.3(F)**. THIS SHALL INCLUDE, BUT, NOT BE LIMITED TO THE PROVISION OF A PERMANENT SWITCHING MEANS TO SERVICE THE CONTRACTOR TO A PORTABLE GENERATOR. PROVIDE MEANS TO PREVENT THE GENERATOR FROM PREVENTION OF INADVERTENT INTERCONNECTION OF POWER SOURCES, CONTACT POINTS THAT ANNUNCIATE AT A LOCATION REMOTE FROM THE GENERATOR, ETC. VERIFY LOCATION WITH ARCHITECT, OWNER, AND SUBMITTAL TO THE MANUFACTURER.
 - 11 PROVIDE A **400A-3P, 240V** RATED, SERVICE ENTRANCE RATED, FUSED DISCONNECT SWITCH, FUSED AT **400A**. DISCONNECT SHALL BE INSTALLED IN ACCORDANCE WITH NEC #95.6(4.3).
 - 12 PROVIDE A **100A, 240V, 4W** SELF CONTAINED UTILITY METER SOCKET. COORDINATE PANEL WORK REGARDING UTILITY METER WITH LOCAL UTILITY COMPANY.
 - 13 PROVIDE A **320A, 240V, 4W** SELF CONTAINED UTILITY METER SOCKET. COORDINATE PANEL WORK REGARDING UTILITY METER WITH LOCAL UTILITY COMPANY.
 - 14 ROUTE TO THE FIRE CONTROL PANEL, FOR THE 20HP FIRE PUMP WITH INTEGRAL AUTOMATIC TRANSFER SWITCHING CAPABILITY AND SOFT START METHOD TO BE SUPPLIED BY THE PLUMBING AND/OR FIRE SUPPLY CONTRACTOR. PROVIDE WIRING TO THE FIRE CONTROL PANEL. PROVIDE ALL WIRING REQUIRED FOR A COMPLETE ELECTRICAL INSTALLATION IN ACCORDANCE WITH THE MANUFACTURER'S REQUIREMENTS, IN ADDITION TO STATE AND LOCAL CODES. THE INSTALLATION SHALL BE IN FULL COMPLIANCE WITH WITH N.E.C. ARTICLE #695.
 - 15 PROVIDE CONCRETE PAD OR PRE-CAST CONCRETE PAD IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS. ADDITIONALLY, PROVIDE A TRANSFORMER GROUNDING MAT IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS.
 - 16 ROUTE A **#3/0** COPPER GROUND CONDUCTOR TO THE GROUNDING BAR DESCRIBED IN CODED NOTE #16.
 - 17 PROVIDE A MASTER SERVICE ENTRANCE GROUND ROD TO WHICH ALL SERVICE ENTRANCE MAINS SHALL BE BONDED. THE EQUIPMENT SHALL BE A STORM COPPER #3/0-6" O.D. GROUND BAR KIT. BAR SHALL BE 25" THICK, 4" X 12" BENT DOWN ON BRACKETED W/ INSULATORS. PROVIDE A MINIMUM OF (6) 437" DIAMETER 2-HOLE AND (6) 281" DIAMETER MOUNTINGS OR AS OTHERWISE REQUIRED.

Seal

**NOT FOR
CONSTRUCTION**

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

[illegible]

--	--

who
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

**3455 W. Dublin Granville Rd,
Columbus OH, 43235**

Drawing Title	
POWER RISER DIAGRAM	
Date 03.05.2026	Project Number 24-065
Drawn by DUS	Drawing Number E0.05B
Checked by KDS	
Approved GSS	

APARTMENT SWITCHBOARD "ASWB-B" ELECTRIC SERVICE CALCULATION					
DESCRIPTION	AREA	QUANTITY	LOAD	TOTAL WC	N.E.C. ARTICLE
1 BEDROOM UNITS					
1BED UNIT TYPE A1	713	19	3	40641	220.84(c)(1)
1BED UNIT TYPE A1.3	752	2	3	4512	220.84(c)(1)
1BED UNIT TYPE A2	813	8	3	19512	220.84(c)(1)
1BED UNIT TYPE A2.2	887	16	3	43056	220.84(c)(1)
1BED UNIT TYPE B1	704	4	3	8448	220.84(c)(1)
2 BEDROOM UNITS					
2BED UNIT TYPE B1	1035	4	3	12420	220.84(c)(1)
2BED UNIT TYPE B1.4	1015	4	3	12180	220.84(c)(1)
2BED UNIT TYPE B2	1151	18	3	62154	220.84(c)(1)
2BED UNIT TYPE B03.1	1275	4	3	15300	220.84(c)(1)
2BED UNIT TYPE B01	1219	8	3	29256	220.84(c)(1)
2BED UNIT TYPE B04	1362	4	3	15344	220.84(c)(1)
3 BEDROOM UNITS					
3BED UNIT TYPE C2	1422	8	3	34128	220.84(c)(1)
TOTAL CONNECTED LIGHTING/RECEPTACLE LOAD:				297,951 W	
SMALL APPLIANCE BRANCH CIRCUITS		99	1500	297000	220.84(c)(2)
LAUNDRY CIRCUIT (WASHING MACHINE)		99	1500	148500	220.84(c)(2)
REFRIGERATOR		99	600	59400	220.84(c)(3)
ELECTRIC RANGE/OVEN		99	8000	792000	220.84(c)(3)
RANGE HOOD/MICROWAVE		99	1680	166320	220.84(c)(3)
DISHWASHER/DISPOSER		99	1200	108000	220.84(c)(3)
ELECTRIC DRYER		99	5000	495000	220.84(c)(3)
ELECTRIC WATER HEATER		99	4500	445500	220.84(c)(3)
1.5 TON HVAC		49	5100	250500	220.84(c)(5)
2 TON HVAC		42	6596	281316	220.84(c)(5)
2.5 TON HVAC		8	8871	70968	220.84(c)(5)
TOTAL CONNECTED EQUIPMENT LOAD:				3,128,624 W	
TOTAL CONNECTED LOAD:				3,426,575 W	
DEMAND FACTOR:				23%	TABLE 220.84
TOTAL DEMAND LOAD:				786,112 W	
AMPS AT 120/208V-3Ø				2,187.6 A	

BUILDING "B" TOTAL ELECTRIC SERVICE CALCULATION					
DESCRIPTION	AREA	QUANTITY	LOAD	TOTAL KW	N.E.C. ARTICLE
1 BEDROOM UNITS					
1BED UNIT TYPE A1	713	19	3	40641	220.84(c)(1)
1BED UNIT TYPE A1.3	752	2	3	4512	220.84(c)(1)
1BED UNIT TYPE A2	813	8	3	19512	220.84(c)(1)
1BED UNIT TYPE A2.2	897	16	3	43056	220.84(c)(1)
1BED UNIT TYPE S1	704	4	3	8448	220.84(c)(1)
2 BEDROOM UNITS					
2BED UNIT TYPE B1	1035	4	3	12420	220.84(c)(1)
2BED UNIT TYPE B1.4	1015	4	3	12180	220.84(c)(1)
2BED UNIT TYPE B2	1151	18	3	62154	220.84(c)(1)
2BED UNIT TYPE B03.1	1275	4	3	15300	220.84(c)(1)
2BED UNIT TYPE B01	1219	8	3	26256	220.84(c)(1)
2BED UNIT TYPE B04	1362	4	3	16344	220.84(c)(1)
3 BEDROOM UNITS					
3BED UNIT TYPE C2	1422	8	3	34128	220.84(c)(1)
TOTAL CONNECTED LIGHTING/RECEPTACLE LOAD:				297.951 W	
SMALL APPLIANCE BRANCH CIRCUITS	-	198	1500	297000	220.84(c)(2)
LAUNDRY CIRCUIT (WASHING MACHINE)	-	99	1500	148500	220.84(c)(2)
REFRIGERATOR	-	99	500	59400	220.84(c)(2)
ELECTRIC RANGE/OVEN	-	99	8000	792000	220.84(c)(3)
RANGE HOOD/MICROWAVE	-	99	1680	166320	220.84(c)(3)
DISHWASHER/DISPOSER	-	99	1200	118800	220.84(c)(3)
ELECTRIC DRYER	-	99	5000	495000	220.84(c)(3)
ELECTRIC WATER HEATER	-	99	4500	445500	220.84(c)(3)
1.5 TON HVAC	-	49	5100	250920	220.84(c)(5)
2 TON HVAC	-	42	6998	291316	220.84(c)(5)
2.5 TON HVAC	-	8	8871	70968	220.84(c)(5)
TOTAL CONNECTED EQUIPMENT LOAD:				3,128,624 W	
TOTAL CONNECTED LOAD:				3,426,575 W	
DEMAND FACTOR:				23%	TABLE 220.84
TOTAL DEMAND LOAD:				788,112 W	
AMPS AT 120/208V-3Ø				2,187.6 A	

METER CENTER "MC-BS" ELECTRICAL SERVICE CALCULATION					
DESCRIPTION	AREA	QUANTITY	LOAD	TOTAL WC	N.E.C. ARTICLE
1 BEDROOM UNITS					
1BED UNIT TYPE A1	713	12	3	25668	220.84(c)(1)
2 BEDROOM UNITS					
2BED UNIT TYPE B1.4	1015	4	3	12180	220.84(c)(1)
2BED UNIT TYPE B2	1151	8	3	27624	220.84(c)(1)
3 BEDROOM UNITS					
3BED UNIT TYPE C2	1422	8	3	34128	220.84(c)(1)
TOTAL CONNECTED LIGHTING/RECEPTACLE LOAD:				99,600	
SMALL APPLIANCE BRANCH CIRCUITS		64	1500	96000	220.84(c)(2)
LAUNDRY CIRCUIT (WASHING MACHINE)		32	1500	48000	220.84(c)(2)
REFRIGERATOR		32	600	19200	220.84(c)(3)
ELECTRIC RANGE/OVEN		32	8000	256000	220.84(c)(3)
RANGE HOOD/MICROWAVE		32	1680	53760	220.84(c)(3)
DISHWASHER/DISPOSER		32	1200	38400	220.84(c)(3)
ELECTRIC DRYER		32	5000	160000	220.84(c)(3)
ELECTRIC WATER HEATER		32	4500	144000	220.84(c)(3)
1.5 TON HVAC		12	5180	62160	220.84(c)(5)
2 TON HVAC		12	6698	80376	220.84(c)(5)
2.5 TON HVAC		8	8871	70968	220.84(c)(5)
TOTAL CONNECTED EQUIPMENT LOAD:				1,028,864 W	
TOTAL CONNECTED LOAD:				1,128,464 W	
DEMAND FACTOR:				31%	TABLE 220.84
TOTAL DEMAND LOAD:				349,824 W	
AMPS AT 120V/208V-3Ø				971.0 A	


METER CENTER "MC-BC" ELECTRICAL SERVICE CALCULATION						
DESCRIPTION	AREA	QUANTITY	LOAD	TOTAL WC	N.E.C. ARTICLE	
1 BEDROOM UNITS						
1BED UNIT TYPE A1.3	752	2	3	4512	220	84(C)(1)
1BED UNIT TYPE AD2	897	16	3	43056	220	84(C)(1)
2 BEDROOM UNITS						
2BED UNIT B2	1151	10	3	34530	220	84(C)(1)
2BED UNIT TYPE BD3.1	1275	4	3	15300	220	84(C)(1)
3 BEDROOM UNITS						
TOTAL CONNECTED LIGHTING/RECEPTACLE LOAD:				97,398 W		
SMALL APPLIANCE BRANCH CIRCUITS		64	1500	96000	220	84(C)(2)
LAUNDRY CIRCUIT (WASHING MACHINE)		32	1500	48000	220	84(C)(2)
REFRIGERATOR		32	600	19200	220	84(C)(3)
ELECTRIC RANGE/OVEN		32	8000	256000	220	84(C)(3)
RANGE HOOD/MICROWAVE		32	1680	53760	220	84(C)(3)
DISHWASHER/DISPOSER		32	1200	38400	220	84(C)(3)
ELECTRIC DRYER		32	5000	160000	220	84(C)(3)
ELECTRIC WATER HEATER		32	4500	144000	220	84(C)(3)
1.5 TON HVAC		18	5180	93240	220	84(C)(5)
2 TON HVAC		14	6688	93772	220	84(C)(5)
2.5 TON HVAC		0	8071	0	220	84(C)(5)
TOTAL CONNECTED EQUIPMENT LOAD:				1,002,372 W		
TOTAL CONNECTED LOAD:				1,099,770 W		
DEMAND FACTOR:				31%	TABLE	220.84
TOTAL DEMAND LOAD:				344,929 W		
AMPS AT 120/209V-3Ø				946.4 A		

METER CENTER "MC-BN" ELECTRIC SERVICE CALCULATION					
DESCRIPTION	AREA	QUANTITY	LOAD	TOTAL WC	N.E.C. ARTICLE
1 BEDROOM UNITS					
1BED UNIT TYPE A1	713	7	3	14973	220.84(c)(1)
1BED UNIT TYPE A2	813	8	3	19512	220.84(c)(1)
1BED UNIT TYPE S1	704	4	3	8448	220.84(c)(1)
2 BEDROOM UNITS					
2BED UNIT TYPE B1	1035	4	3	12420	220.84(c)(1)
2BED UNIT TYPE BD1	1219	8	3	29256	220.84(c)(1)
2BED UNIT TYPE BD4	1362	4	3	16344	220.84(c)(1)
3 BEDROOM UNITS					
TOTAL CONNECTED LIGHTING/RECEPTACLE LOAD:				100 863 W	
SMALL APPLIANCE BRANCH CIRCUITS				70	
LAUNDRY CIRCUIT (WASHING MACHINE)	-	35	1500	105000	220.84(c)(2)
REFRIGERATOR	-	35	5000	52500	220.84(c)(2)
ELECTRIC RANGE/OVEN	-	35	8000	280000	220.84(c)(3)
RANGE HOOD/MICROWAVE	-	35	1680	58800	220.186(c)(3)
DISHWASHER/DISPOSER	-	35	1200	42000	220.84(c)(3)
ELECTRIC DRYER	-	35	5000	175000	220.84(c)(3)
ELECTRIC WATER HEATER	-	35	4500	157500	220.84(c)(3)
1.5 TON HVAC	-	19	5180	98420	220.84(c)(6)
2 TON HVAC	-	16	4688	107168	220.84(c)(6)
2.5 TON HVAC	-	0	8871	0	220.84(c)(6)
TOTAL CONNECTED EQUIPMENT LOAD:				1,067,388 W	
TOTAL CONNECTED LOAD:				1,186,341 W	
DEMAND FACTOR:				30%	TABLE 220.84
TOTAL DEMAND LOAD:				359,502 W	
AMPS AT 120/208V-3Ø				997.9 A	

Seal

**NOT FOR
CONSTRUCTION**

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

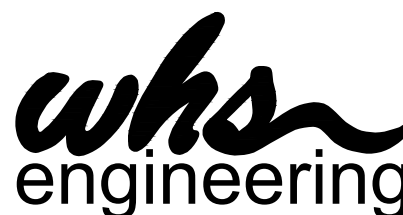

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**


**3455 W. Dublin Granville Rd,
Columbus OH, 43235**

PANEL SCHEDULES AND CALCULATIONS

Date	Project Number
03.05.2026	24-065
Drawn by	Drawing Number
DJS	E0.06B
Checked by	
KDS	
Approved	
GSS	

GENERAL LIGHTING PLAN NOTES

- ALL EXIT SIGNS, EMERGENCY LIGHTING BATTERY PACKS, EMERGENCY LUMINAIRES AND NIGHT LIGHTS (DENOTED "NL") SHALL BE CONNECTED TO THE LOCAL LIGHTING CIRCUIT AHEAD OF ANY CONTROLS SUCH AS: SWITCHES (DEVICE), OCCUPANCY SENSORS AND/OR RELAY CONTROLS.
- EXACT LOCATION OF ALL LUMINAIRES, AND EXACT MOUNTING HEIGHT OF ALL PENDANT MOUNTED LUMINAIRES SHALL BE COORDINATED WITH ARCHITECTURAL DRAWINGS PRIOR TO ANY ROUGH-INS.
- REFER TO WIRING SCHEDULE ON SHEET #E0.03A/B/C FOR 15A/20A LIGHTING BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

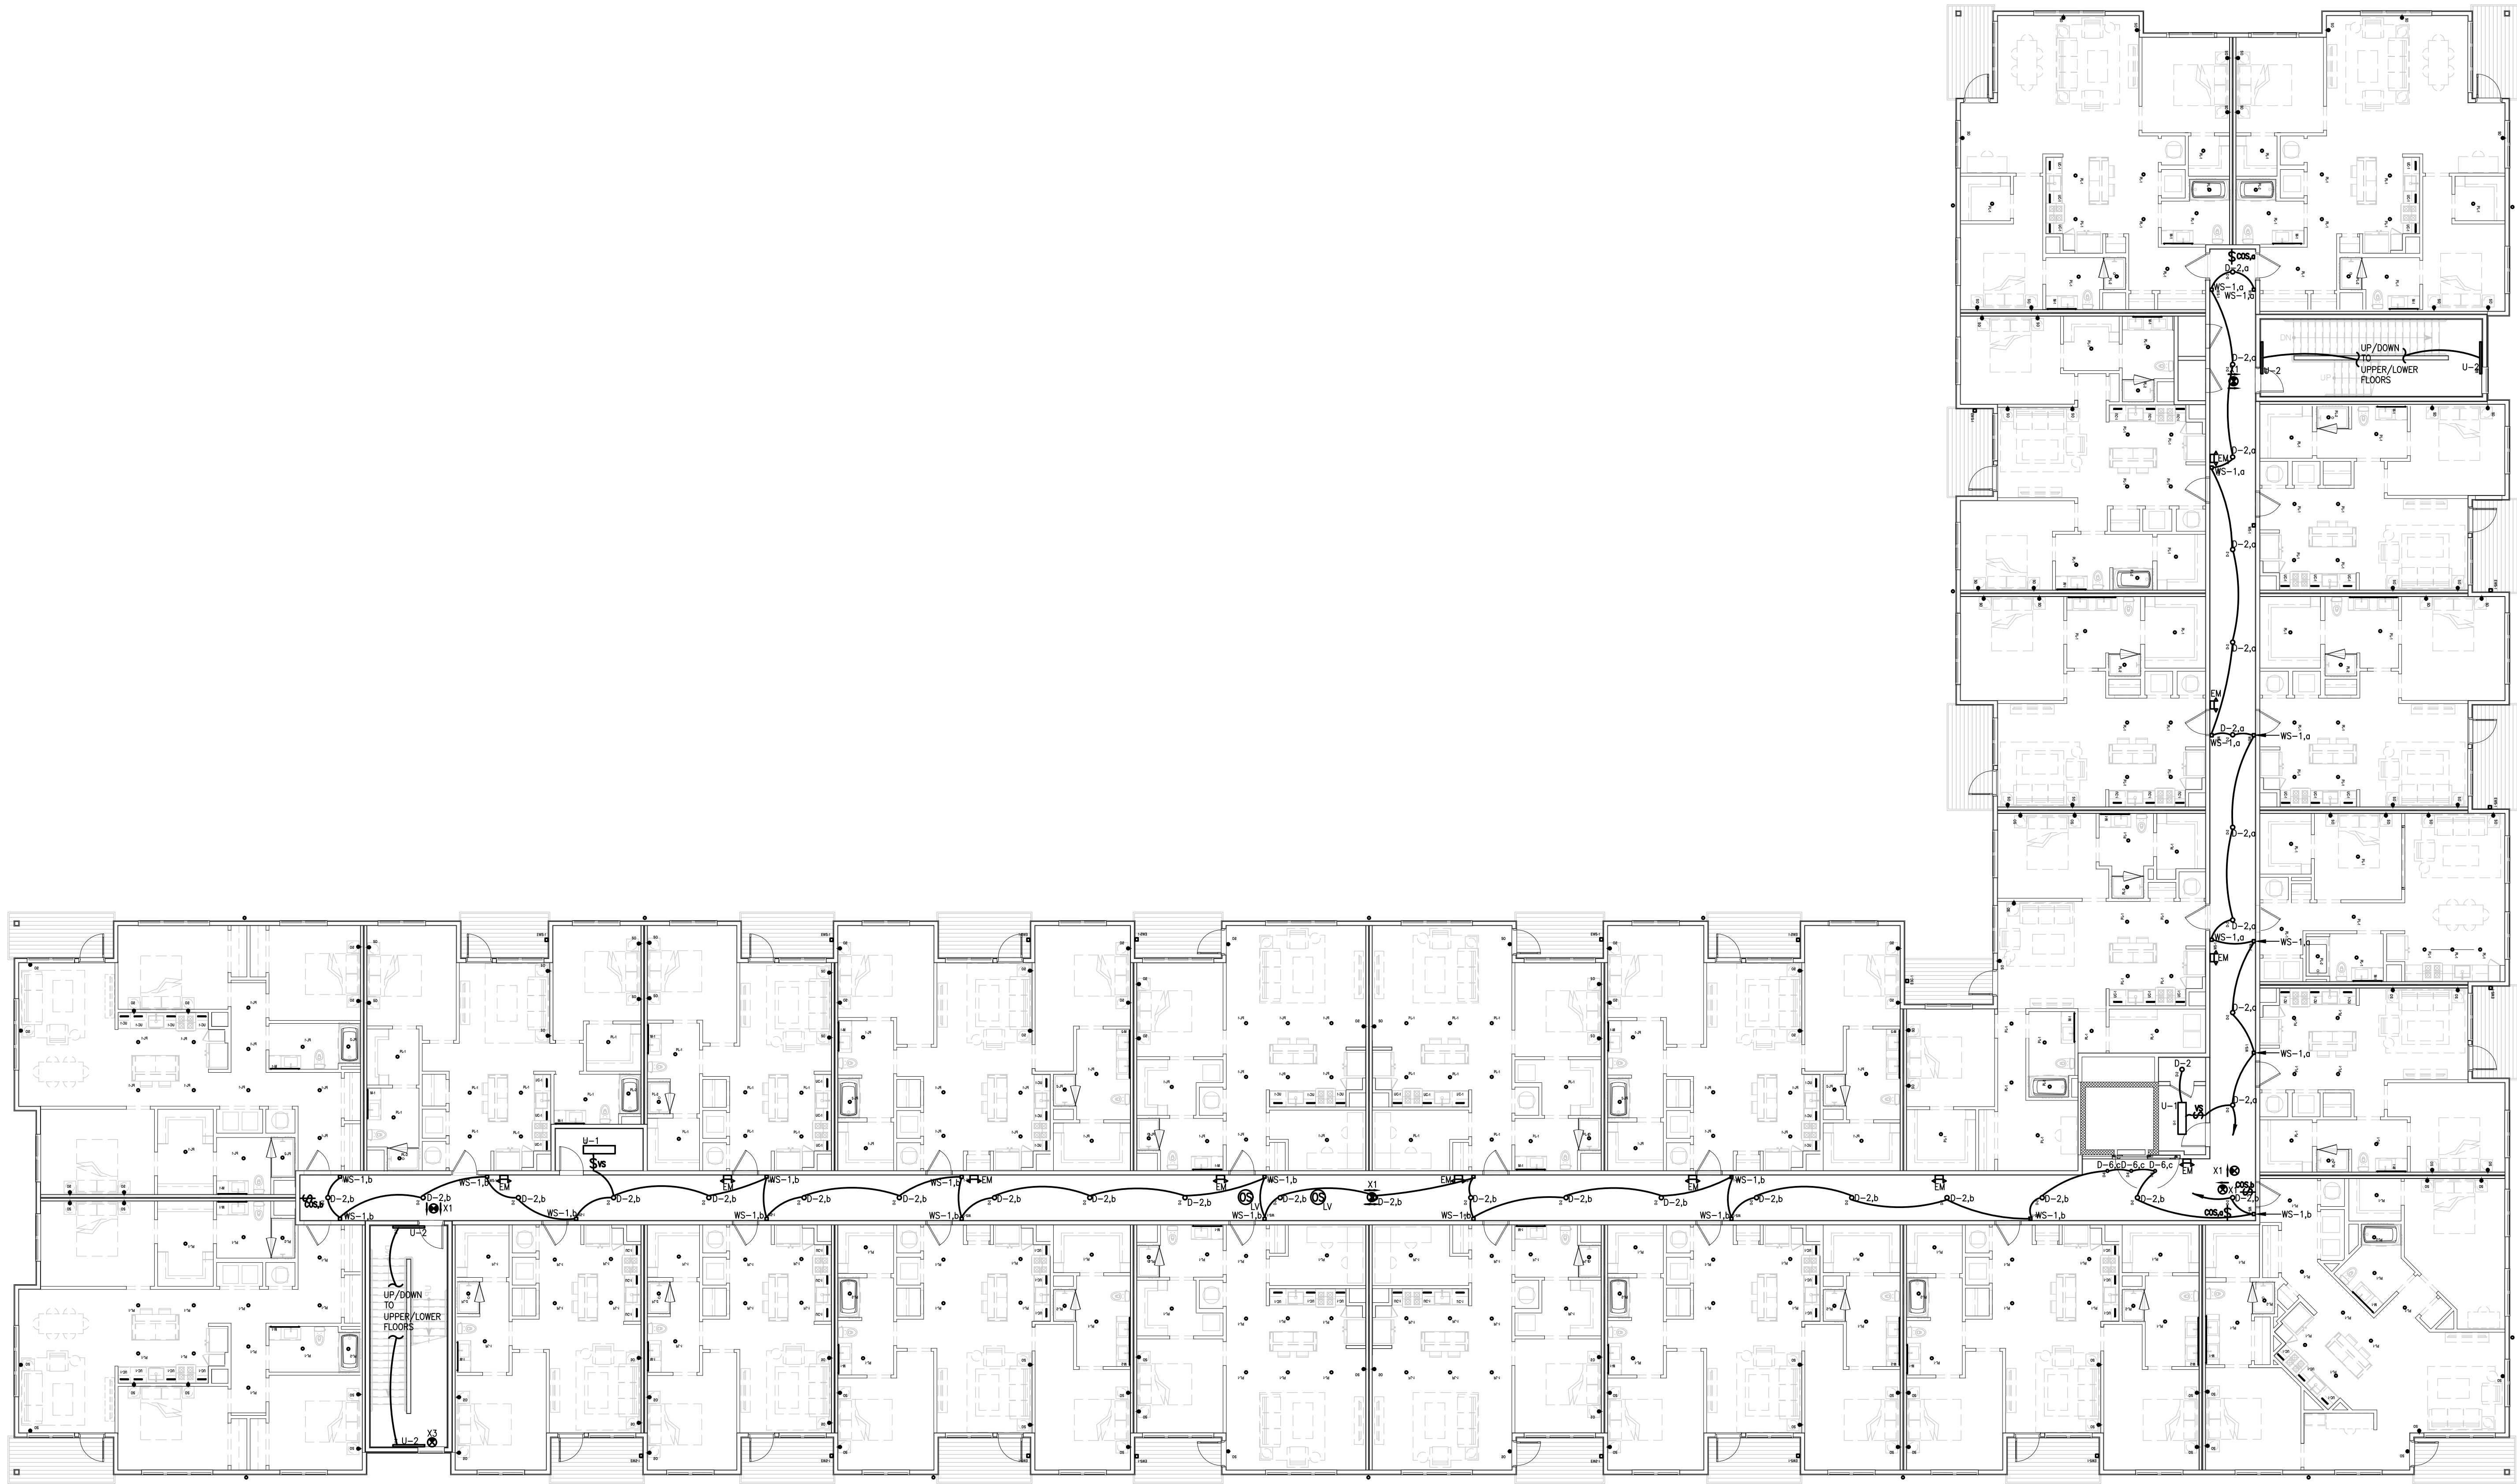

1
E1.02B
BUILDING B
SECOND FLOOR LIGHTING PLAN
SCALE: 3/32" = 1'-0"

Seal

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

whs
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title
**SECOND FLOOR LIGHTING
PLAN**


Date: 03.05.2026	Project Number: 24-065
Drawn By: DJS	Drawing Number:
Checked By: KDS	E1.02B
Approved: GSS	

- GENERAL LIGHTING PLAN NOTES
- ALL EXIT SIGNS, EMERGENCY LIGHTING BATTERY PACKS, EMERGENCY LUMINAIRES AND NIGHT LIGHTS (DENOTED "NL") SHALL BE CONNECTED TO THE LOCAL LIGHTING CIRCUIT AHEAD OF ANY CONTROLS SUCH AS: SWITCHES (DEVICE), OCCUPANCY SENSORS AND/OR RELAY CONTROLS.
 - EXACT LOCATION OF ALL LUMINAIRES, AND EXACT MOUNTING HEIGHT OF ALL PENDANT MOUNTED LUMINAIRES SHALL BE COORDINATED WITH ARCHITECTURAL DRAWINGS PRIOR TO ANY ROUGH-INS.
 - REFER TO WIRING SCHEDULE ON SHEET #E0.03A/B/C FOR 15A/20A LIGHTING BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
 - ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
 - A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

Seal

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

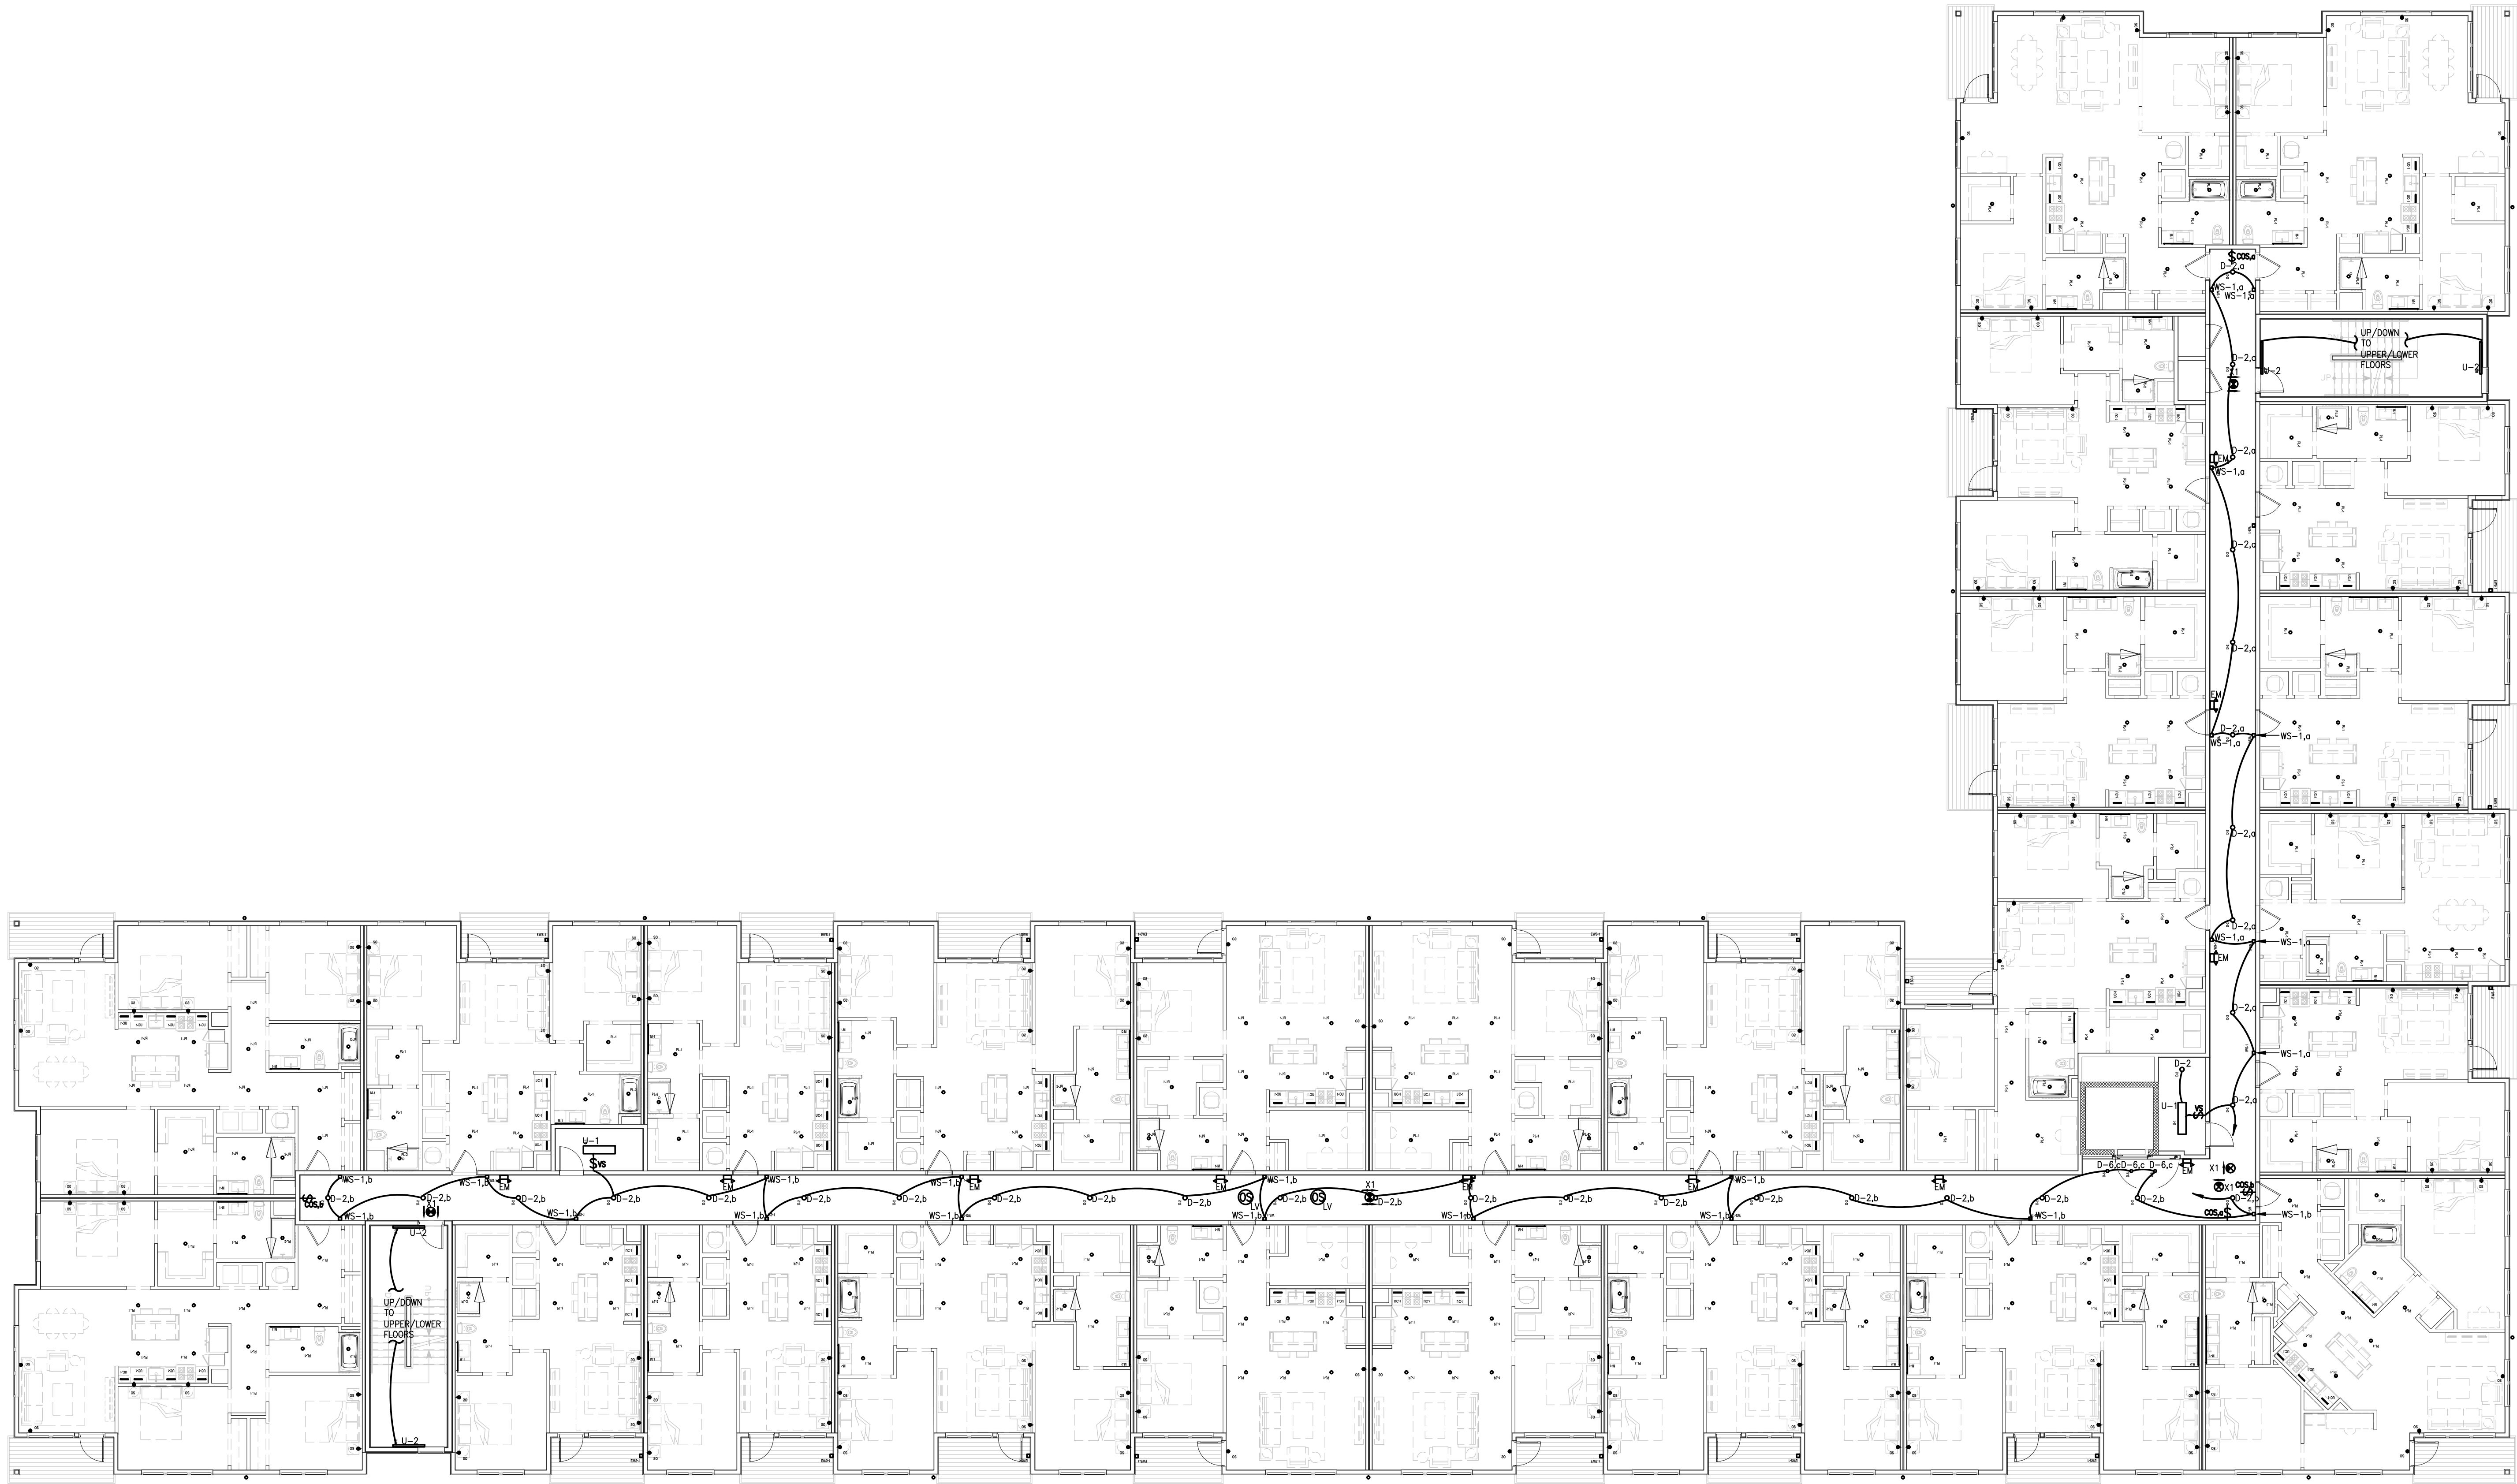

1
E1.03B
BUILDING B
THIRD FLOOR LIGHTING PLAN
SCALE: 3/32" = 1'-0"

whs
engineering
2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title
**THIRD FLOOR LIGHTING
PLAN**

Date 03.05.2026	Project Number 24-065
Drawn By DJS	Drawing Number
Checked By KDS	
Approved GSS	E1.03B


GENERAL LIGHTING PLAN NOTES

- ALL EXIT SIGNS, EMERGENCY LIGHTING BATTERY PACKS, EMERGENCY LUMINAIRES AND NIGHT LIGHTS (DENOTED 'NL') SHALL BE CONNECTED TO THE LOCAL LIGHTING CIRCUIT AHEAD OF ANY CONTROLS SUCH AS: SWITCHES (DEVICE), OCCUPANCY SENSORS AND/OR RELAY CONTROLS.
- EXACT LOCATION OF ALL LUMINAIRES, AND EXACT MOUNTING HEIGHT OF ALL PENDANT MOUNTED LUMINAIRES SHALL BE COORDINATED WITH ARCHITECTURAL DRAWINGS PRIOR TO ANY ROUGH-INS.
- REFER TO WIRING SCHEDULE ON SHEET #E0.03A/B/C FOR 15A/20A LIGHTING BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

Seal

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

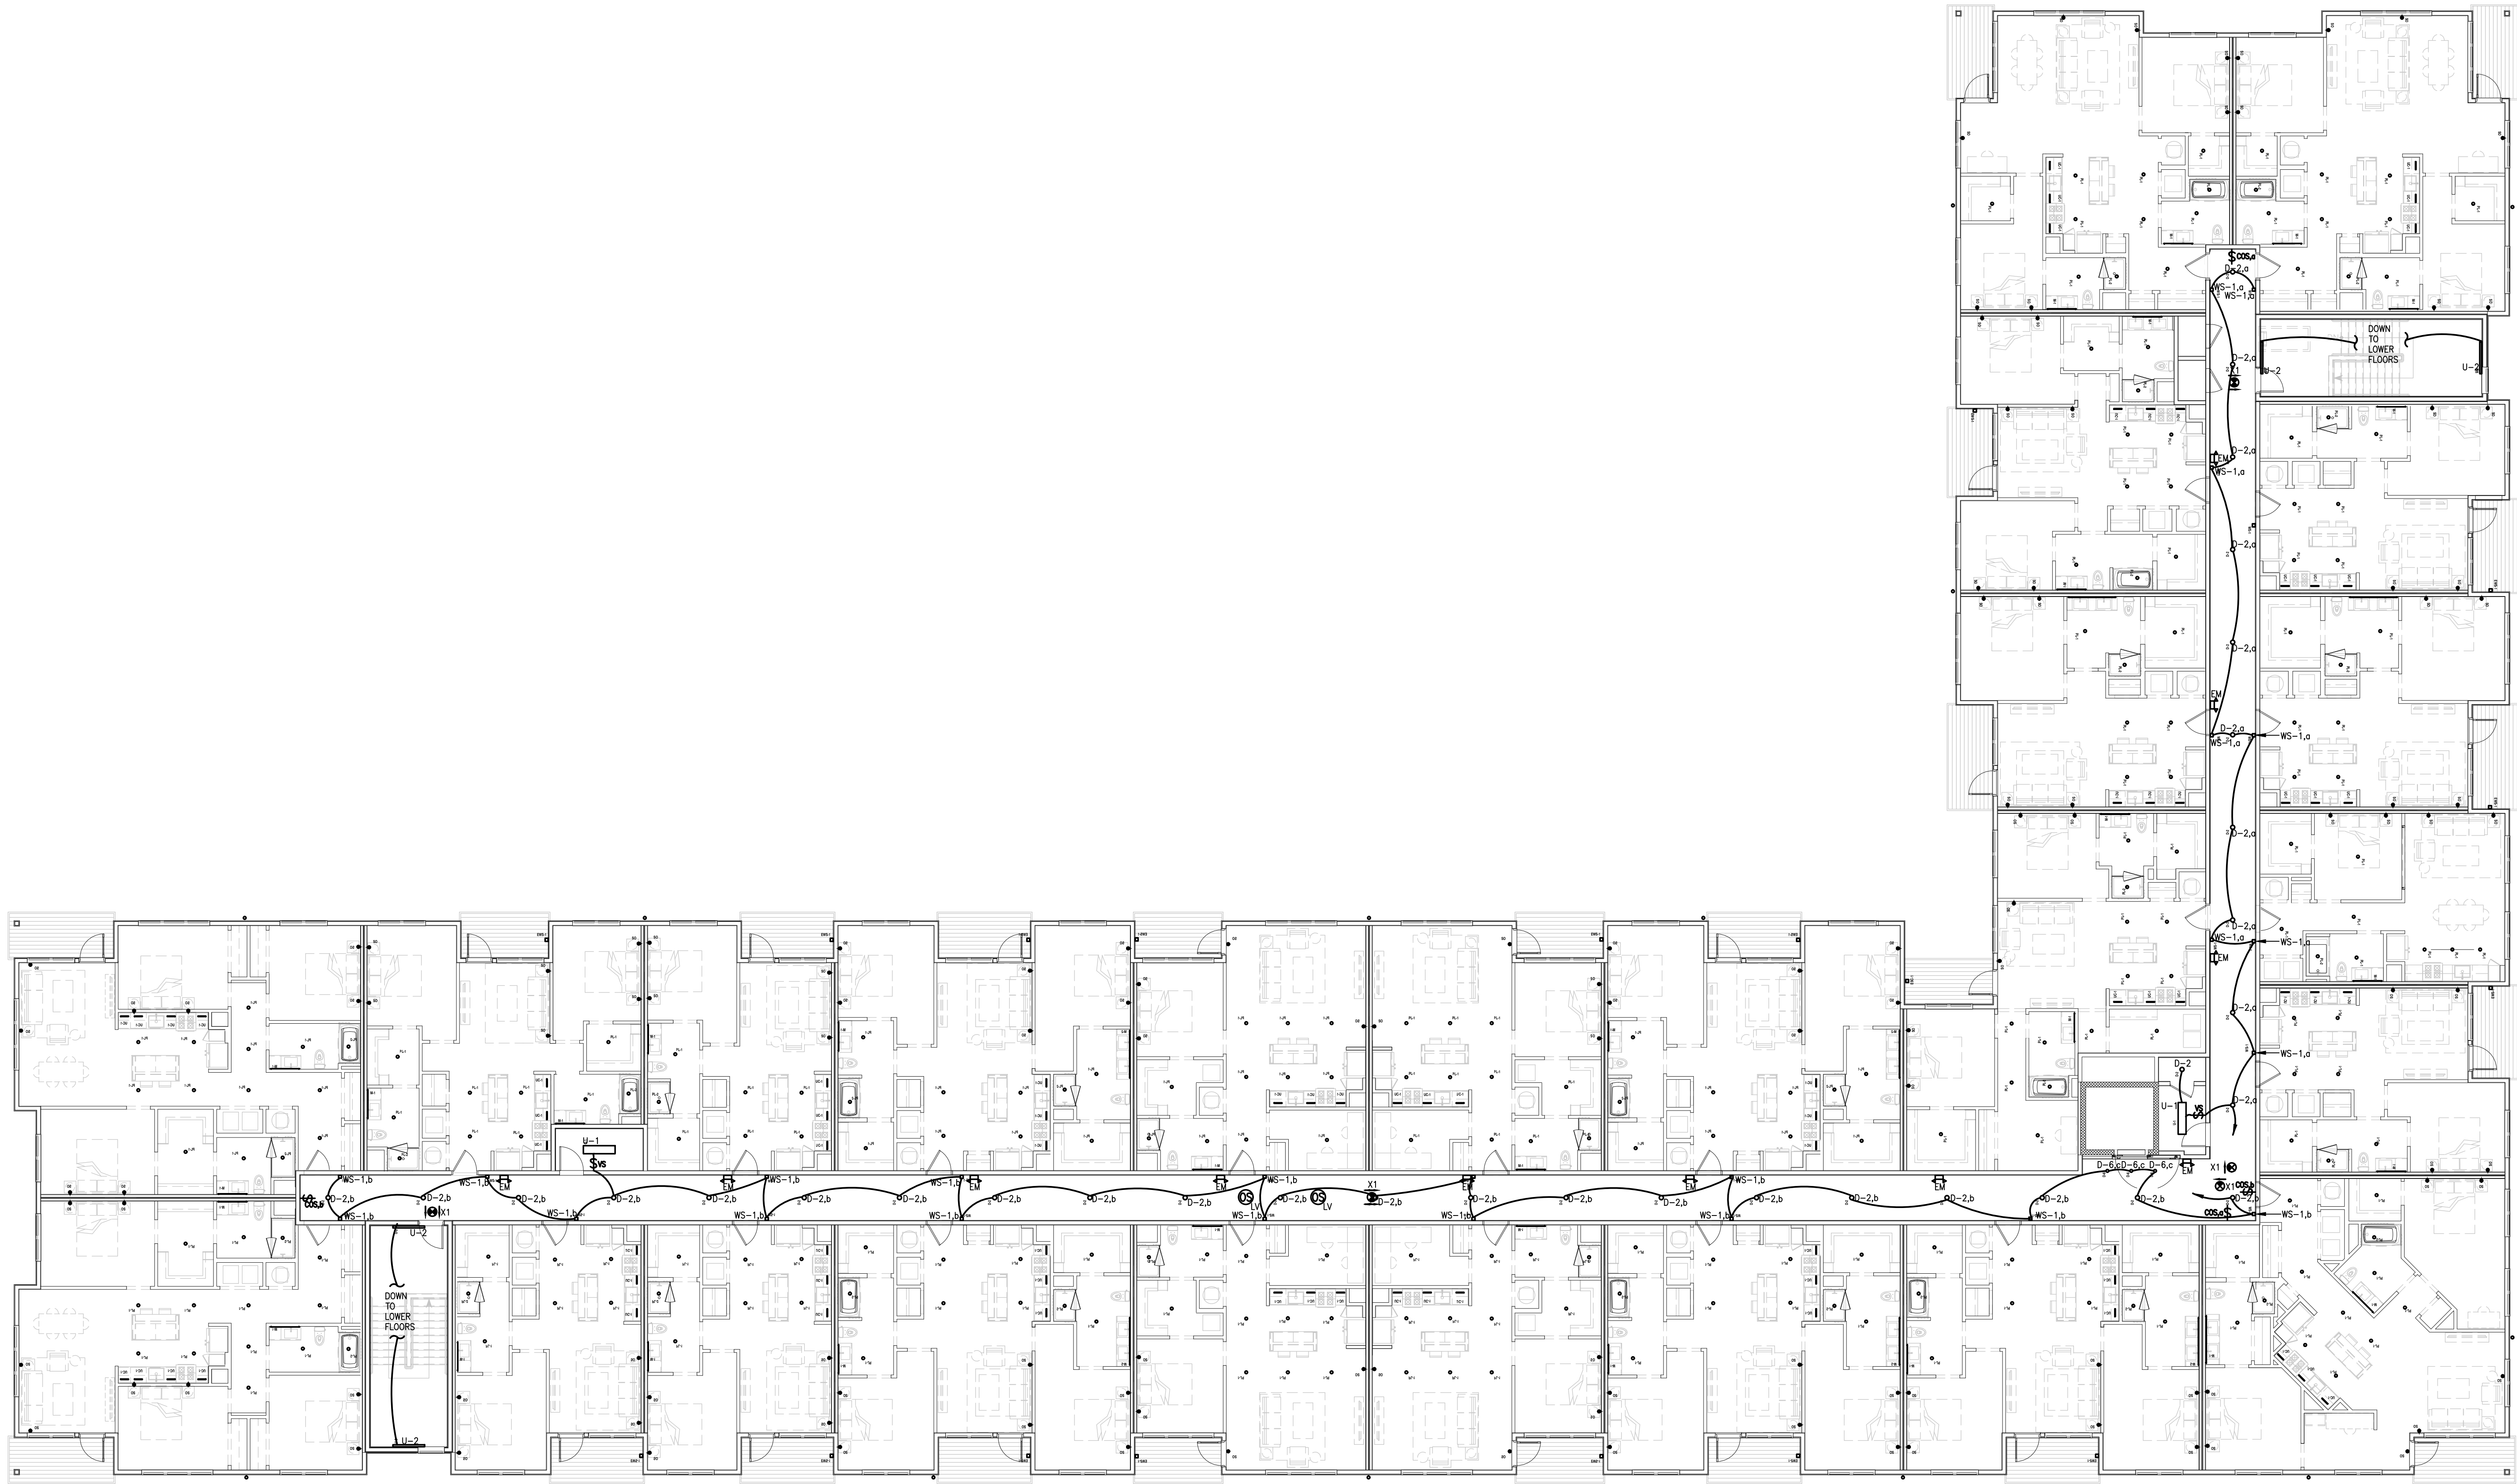

1
E1.04B
BUILDING B
FOURTH FLOOR LIGHTING PLAN
SCALE: 3/32" = 1'-0"

who
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

OSU
AIRPORT WEST
BUILDING B

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title
FOURTH FLOOR LIGHTING
PLAN

Date:	Project Number:
03.05.2026	24-065
Drawn by:	Drawing Number:
DJS	
Checked by:	
KDS	
Approved:	
GSS	


E1.04B

CODED NOTES

- 1 LOCATION OF AREA OF RESCUE COMMUNICATION BASE STATION. REFER TO DIAGRAM ON DRAWING #EO-02.
- 2 REFER TO ELEVATOR GENERAL INSTALLATION NOTES ON DRAWING #EO-03 FOR ALL ELEVATOR ROOM AND ELEVATOR PIT ELECTRICAL REQUIREMENTS.
- 3 PROVIDE A 4" x 4" x 3/4" THICK PLYWOOD BACKBOARD PAINTED WITH FIRE RETARDANT PAINT FOR MAIN COMMUNICATION TERMINAL BOARD (TELEPHONE, TELEVISION, ETC.). INCLUDE ALL WORK REQUIRED BY RESPECTIVE UTILITIES. PROVIDE A COPPER GROUNDING BUS AND #6 AWG GROUNDING CONDUCTOR TO SERVICE GROUNDING POINT(S) (REFER TO DETAIL ON DRAWING #EO-02). INCLUDE (2) DOUBLE DUPLEX RECEPTACLES INSTALLED AT THIS TERMINAL BOARD SERVED FROM (2) 20A-120V-1Ø DEDICATED CIRCUITS. REFER TO COMMUNICATION RISER DIAGRAM ON DRAWING #EO-02 FOR ADDITIONAL INFORMATION.
- 4 ROUTE BRANCH CIRCUITING FOR RECEPTACLES AT THIS LOCATION VERTICALLY AT EACH FLOOR. PROVIDE HOMERUN AS SHOWN ON FOURTH FLOOR.

GENERAL POWER AND COMMUNICATION PLAN NOTES

- EXACT LOCATION OF MECHANICAL, PLUMBING, KITCHEN, FURNITURE SYSTEMS, OWNER FURNISHED EQUIPMENT, ETC. THAT REQUIRE ELECTRICAL CONNECTIONS ARE SHOWN ON THE MECHANICAL, PLUMBING, AND/OR ARCHITECTURAL DRAWINGS. COORDINATE EXACT LOCATIONS WITH RESPECTIVE CONTRACTORS AND/OR VENDORS PRIOR TO ANY ROUGH-INS.
- PRIOR TO ROUGH-IN, REVIEW AND COORDINATE WITH ALL OTHER TRADES' CONTRACT DOCUMENTS TO DETERMINE SPECIFIC MOUNTING LOCATIONS AND ELECTRICAL REQUIREMENTS (VOLTAGE, PHASE, KW, HP, CONNECTION TYPE, ETC.) FOR HVAC AND PLUMBING EQUIPMENT. COORDINATE EXACT MOUNTING LOCATIONS WITH THE SPECIFIC TRADE AND ARCHITECT.
- REFER TO WIRING SCHEDULE ON SHEET #EO.03A/B/C FOR 15A/20A RECEPTACLE BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

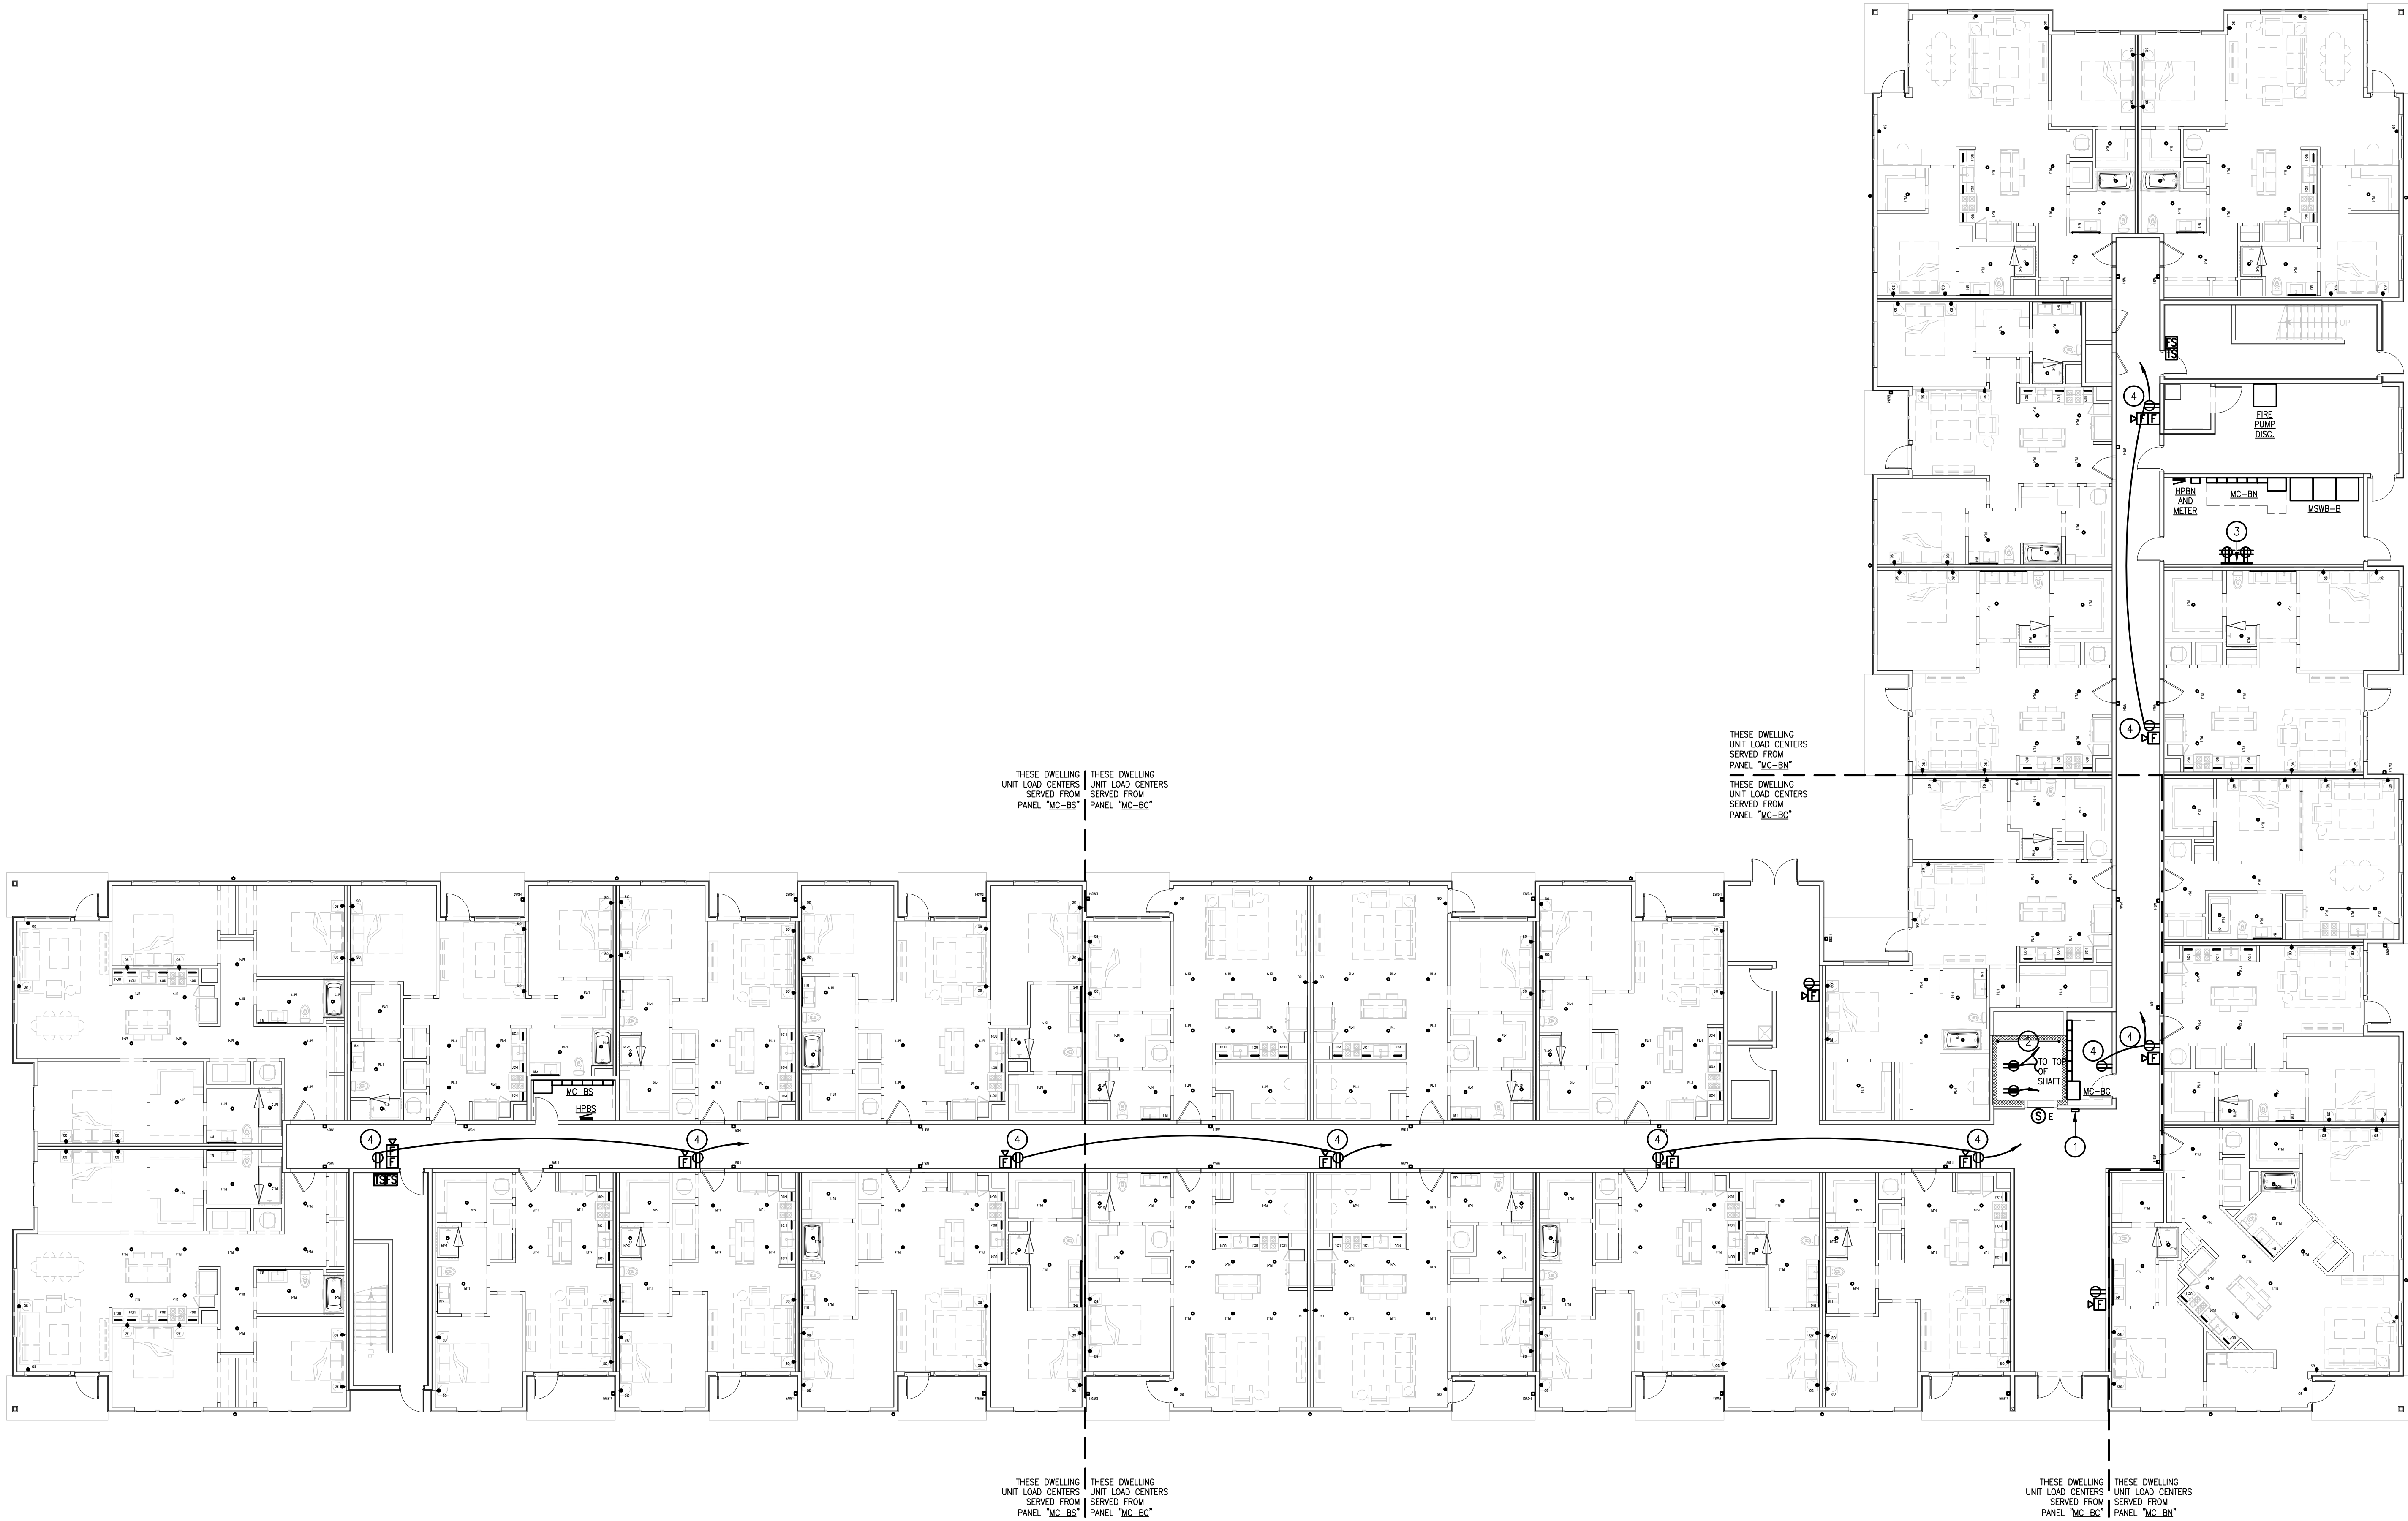

1
E2.01B
BUILDING B
FIRST FLOOR POWER PLAN
SCALE: 3/32" = 1'-0"

Seal

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

whs
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title

**FIRST FLOOR POWER
PLAN**

Date:

03.05.2026

Project Number

24-065

Drawn By

DJS

Drawing Number

Checked by

KDS

Approved

GSS


E2.01B

CODED NOTES

- 1 LOCATION OF AREA OF RESCUE MECHANICAL, PLUMBING, KITCHEN, FURNITURE SYSTEMS, OWNER FURNISHED EQUIPMENT, ETC. THAT REQUIRE ELECTRICAL CONNECTIONS ARE SHOWN ON THE MECHANICAL, PLUMBING, AND/OR ARCHITECTURAL DRAWINGS. COORDINATE EXACT LOCATIONS WITH RESPECTIVE CONTRACTORS AND/OR VENDORS PRIOR TO ANY ROUGH-INS.
- 2 REFER TO ELEVATOR GENERAL INSTALLATION NOTES ON DRAWING #EO-03 FOR ALL ELEVATOR ROOM AND ELEVATOR PIT ELECTRICAL REQUIREMENTS.
- 3 PROVIDE A 4" x 4" x 3/4" THICK PLYWOOD BACKBOARD PAINTED WITH FIRE RETARDANT PAINT FOR MAIN COMMUNICATION TERMINAL BOARD (TELEPHONE, TELEVISION, ETC.). INCLUDE ALL WORK REQUIRED BY RESPECTIVE UTILITIES. PROVIDE A COPPER GROUNDING BUS AND #6 AWG GROUNDING CONDUCTOR TO SERVICE GROUNDING POINT(S). REFER TO DETAIL ON DRAWING #EO-02. INCLUDE (2) DOUBLE DUPLEX RECEPTACLES INSTALLED AT THIS TERMINAL BOARD SERVED FROM (2) 20A-120V-1Ø DEDICATED CIRCUITS. REFER TO COMMUNICATION RISER DIAGRAM ON DRAWING #EO-02 FOR ADDITIONAL INFORMATION.
- 4 ROUTE BRANCH CIRCUITING FOR RECEPTACLES AT THIS LOCATION VERTICALLY AT EACH FLOOR. PROVIDE HOMERUN AS SHOWN ON FOURTH FLOOR.

GENERAL POWER AND COMMUNICATION PLAN NOTES

- EXACT LOCATION OF MECHANICAL, PLUMBING, KITCHEN, FURNITURE SYSTEMS, OWNER FURNISHED EQUIPMENT, ETC. THAT REQUIRE ELECTRICAL CONNECTIONS ARE SHOWN ON THE MECHANICAL, PLUMBING, AND/OR ARCHITECTURAL DRAWINGS. COORDINATE EXACT LOCATIONS WITH RESPECTIVE CONTRACTORS AND/OR VENDORS PRIOR TO ANY ROUGH-INS.
- PRIOR TO ROUGH-IN, REVIEW AND COORDINATE WITH ALL OTHER TRADES' CONTRACT DOCUMENTS TO DETERMINE SPECIFIC MOUNTING LOCATIONS AND ELECTRICAL REQUIREMENTS (VOLTAGE, PHASE, KW, HP, CONNECTION TYPE, ETC.) FOR HVAC AND PLUMBING EQUIPMENT. COORDINATE EXACT MOUNTING LOCATIONS WITH THE SPECIFIC TRADE AND ARCHITECT.
- REFER TO WIRING SCHEDULE ON SHEET #EO.03A/B/C FOR 15A/20A RECEPTACLE BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

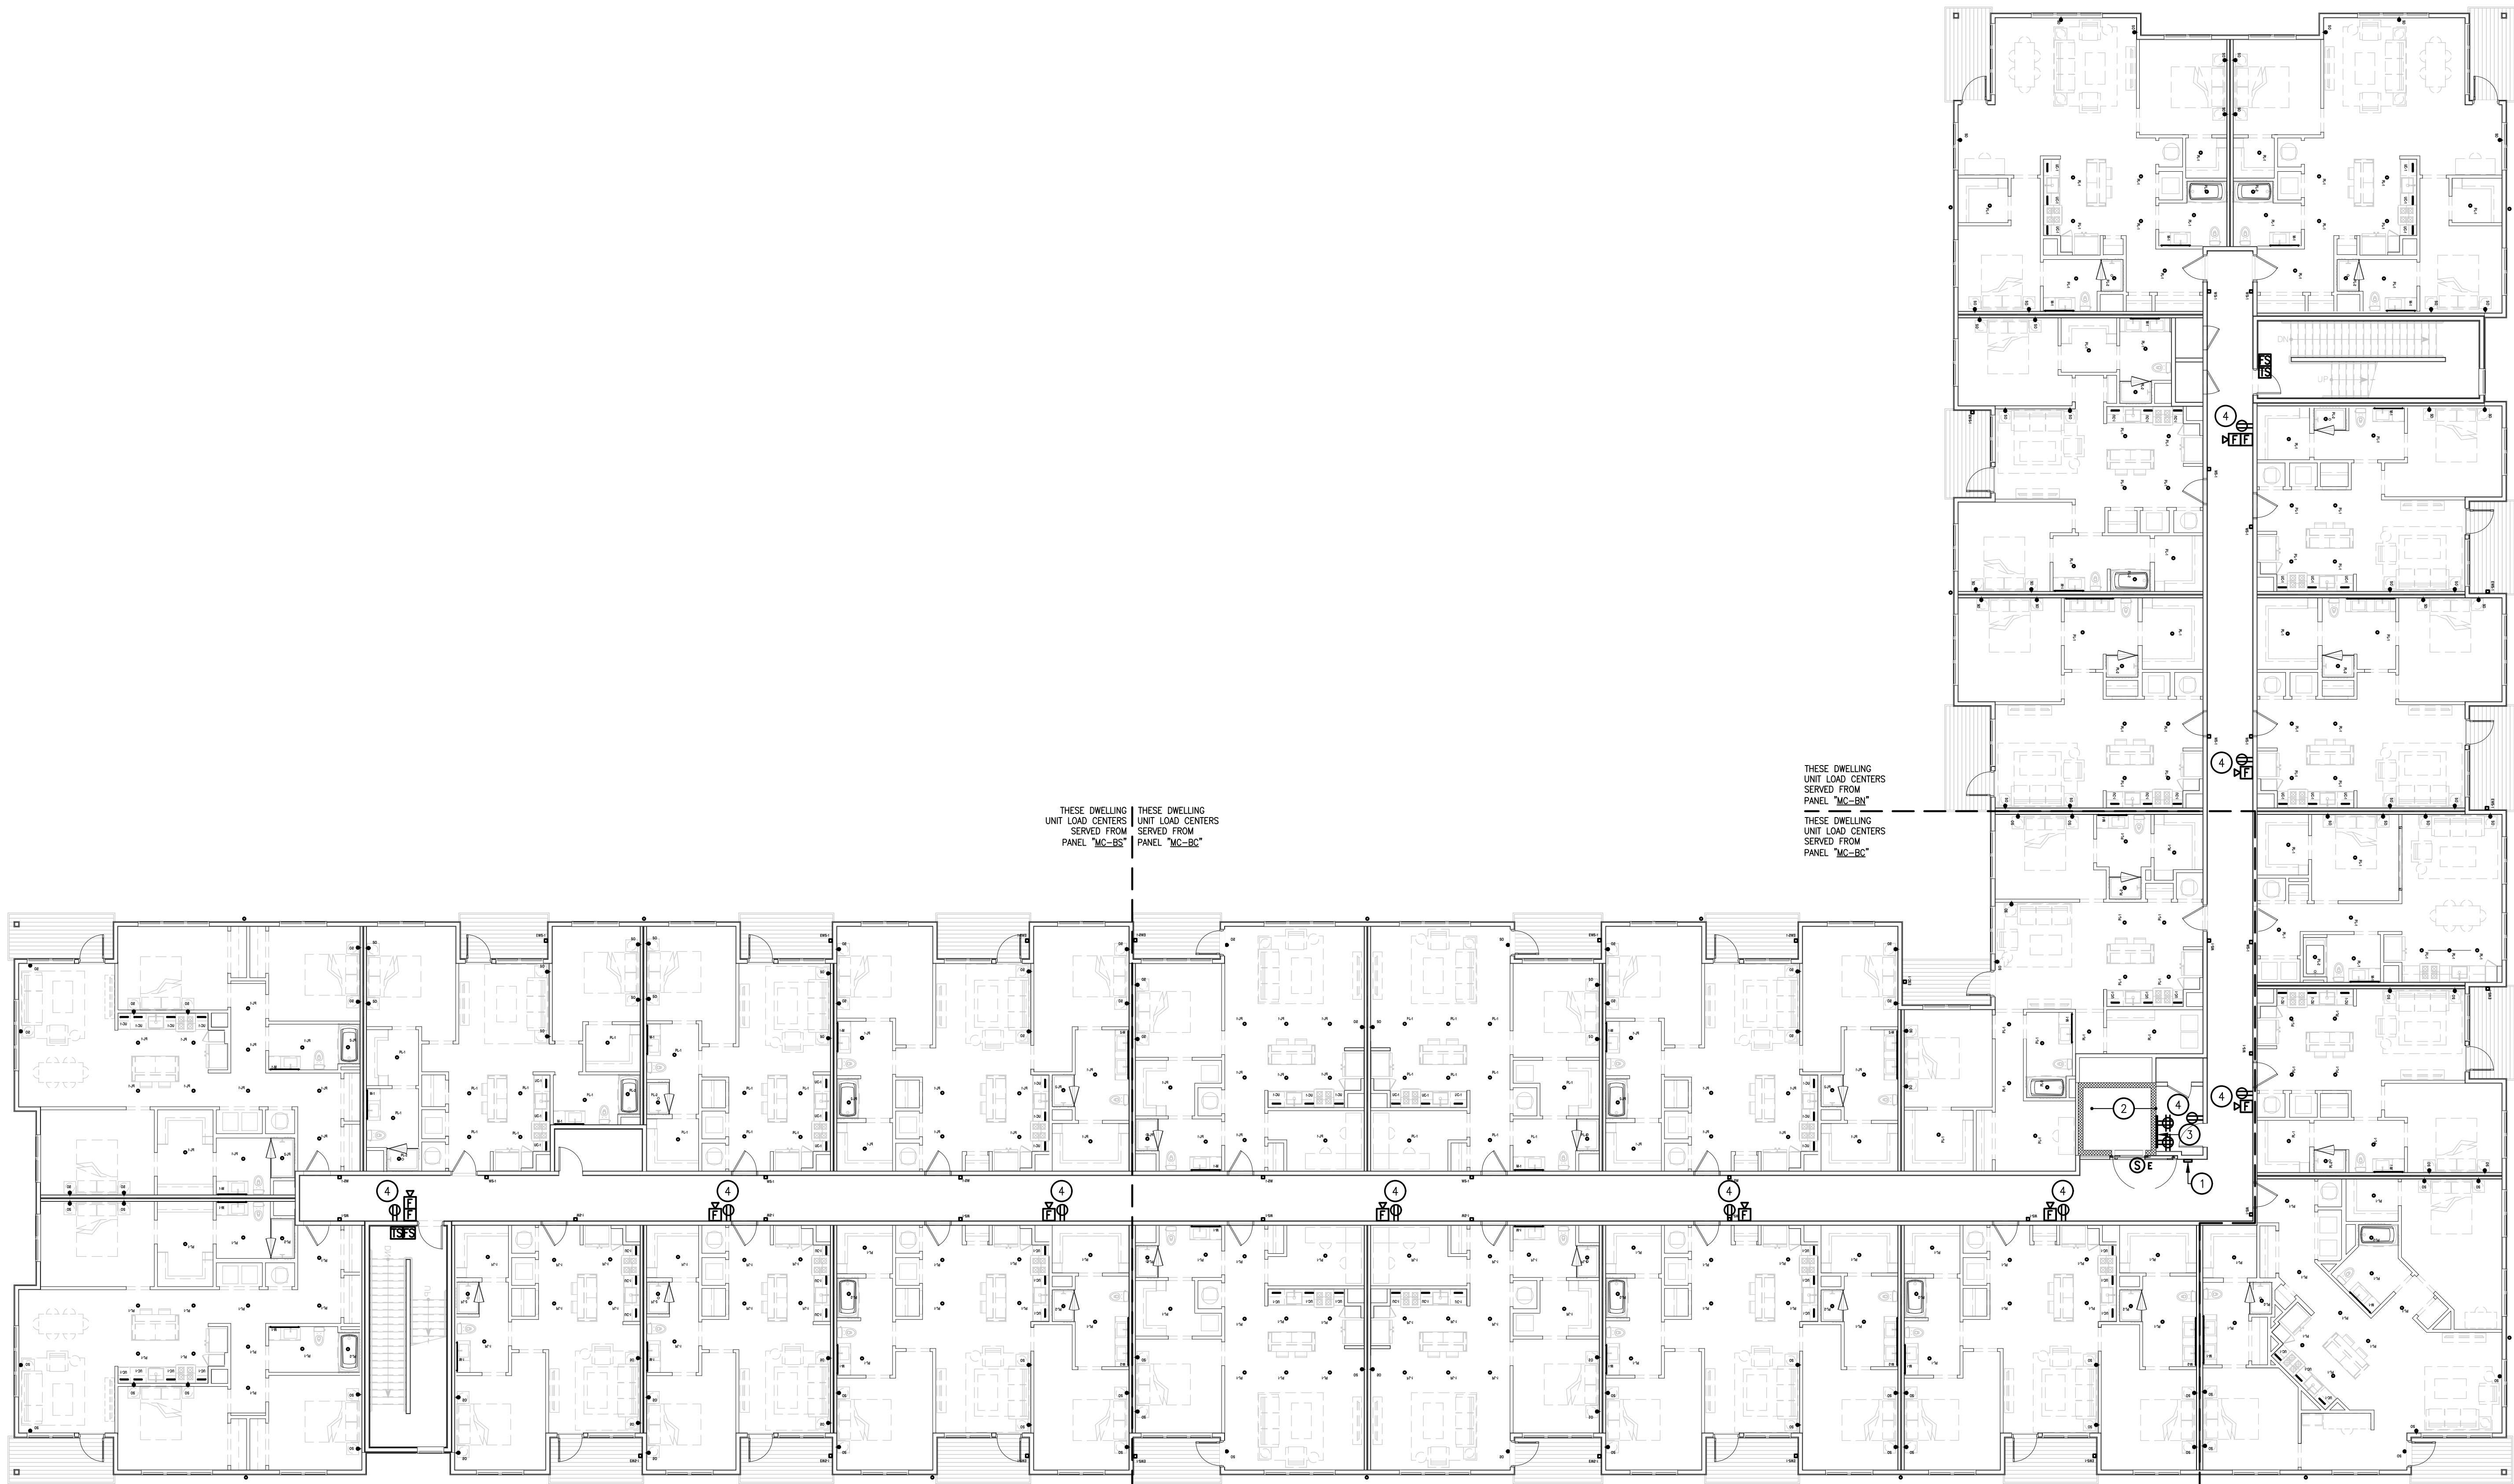

BUILDING B
SECOND FLOOR POWER PLAN
SCALE: 3/32" = 1'-0"

1
E2.02B

Seal

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

who
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

3455 W. Dublin Granville Rd,
Columbus OH, 43235


Drawing Title
**SECOND FLOOR POWER
PLAN**

Date	Project Number
03.05.2026	24-065
Drawn by	Drawing Number E2.02B
DJS	
Checked by	
KDS	
Approved	
GSS	

	LOCATION OF AREA A RESCUE COMMUNICATION BASE STATION. REFER TO DIAGRAM ON DRAWING #E0-02.
②	REFER TO ELEVATOR GENERAL INSTALLATION NOTES ON DRAWING #E0-03 FOR ALL ELEVATOR ROOM AND ELEVATOR PIT ELECTRICAL REQUIREMENTS.
③	PAINT THE BACK OF EACH RECEPTACLE AND BACKBOARD PAINTED WITH FIRE RETARDANT PAINT FOR MAIN COMMUNICATION TERMINAL BOARD (TELEPHONE, TELEVISION, ETC.). INCLUDE ALL WORK REQUIRED BY RESPECTIVE UTILITY. PROVIDE A COPPER GROUNDING BUS AND #6 AWG ALUMINUM CONDUCTOR TO EACH RECEPTACLE. PROVIDE TWO #10 AWG COPPER WIRING DEVICES TO EACH RECEPTACLE. PROVIDE RECEPTACLES INSTALLED AT THIS TERMINAL BOARD SERVED FROM (2) 20A-120V-1P DEDICATED CIRCUITS. REFER TO COMMUNICATION RISER DIAGRAM ON DRAWING #E0-02 FOR ADDITIONAL INFORMATION.
④	INSTALL COPPER GROUNDING BUS AND RECEPTACLES AT THIS LOCATION VERTICALLY AT EACH FLOOR. PROVIDE DOWNERS AS SHOWN ON DRAWING WITH FLOOR.

- EXACT LOCATION OF MECHANICAL, PLUMBING, KITCHEN, FURNITURE, SYSTEMS, OWNER FURNISHED EQUIPMENT, ETC. THAT REQUIRE ELECTRICAL CONNECTIONS ARE SHOWN ON THE MECHANICAL, PLUMBING, AND/OR ARCHITECTURAL DRAWINGS. COORDINATE EXACT LOCATION WITH RESPECTIVE CONTRACTORS AND/OR VENDORS PRIOR TO ANY ROUGH-INS.
- PRIOR TO ROUGH-IN, REVIEW AND COORDINATE WITH ALL OTHER TRADES' CONTRACT DOCUMENTS TO DETERMINE SPECIFIC MOUNTING LOCATIONS AND ELECTRICAL REQUIREMENTS (VOLTAGE, PHASE, KW, HP, CONNECTION TYPE, ETC.). COORDINATE WITH PLUMBING CONTRACTOR TO DETERMINE EXACT MOUNTING LOCATIONS WITH THE SPECIFIC TRADE AND ARCHITECT.
- REFER TO WIRING SCHEDULE ON SHEET **60304B/6** FOR 15A/20A RECEPTACLE BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCORD TO VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN EACH PANEL. JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

**NOT FOR
CONSTRUCTION**

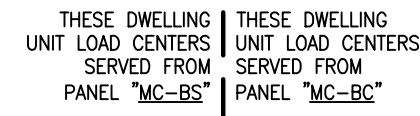[illegible]

THESE DWELLING
UNIT LOAD CENTERS
SERVED FROM
PANEL "MC-BN"

THESE DWELLING
UNIT LOAD CENTERS
SERVED FROM
PANEL "MC-BG"

THESE DWELLING UNIT LOAD CENTERS SERVED FROM PANEL "MC-BS"	THESE DWELLING UNIT LOAD CENTERS SERVED FROM PANEL "MC-BG"
---	---

THESE DWELLING UNIT LOAD CENTERS SERVED FROM PANEL "MC-BG"	THESE DWELLING UNIT LOAD CENTERS SERVED FROM PANEL "MC-BN"
---	---

BUILDING B
THIRD FLOOR POWER PLAN
SCALE: 3/32" = 1'-0"

1
E2.03B

**OSU
AIRPORT WEST
BUILDING B**

THIRD FLOOR POWER PLAN

Date	Project Number
03.05.2026	24-065
Drawn by	Drawing Number
DJS	
Checked by	
KDS	E2.03B
Approved	
GSS	

CODED NOTES

- 1 LOCATION OF AREA OF RESCUE COMMUNICATION BASE STATION. REFER TO DIAGRAM ON DRAWING #EO-02.
- 2 REFER TO ELEVATOR GENERAL INSTALLATION NOTES ON DRAWING #EO-03 FOR ALL ELEVATOR ROOM AND ELEVATOR PIT ELECTRICAL REQUIREMENTS.
- 3 PROVIDE A 4" x 4" x 3/4" THICK PLYWOOD BACKBOARD PAINTED WITH FIRE RETARDANT PAINT FOR MAIN COMMUNICATION TERMINAL BOARD (TELEPHONE, TELEVISION, ETC.). INCLUDE ALL WORK REQUIRED BY RESPECTIVE UTILITIES. PROVIDE A COPPER GROUNDING BUS AND #6 AWG GROUNDING CONDUCTOR TO SERVICE GROUNDING POINT(S) (REFER TO DETAIL ON DRAWING #EO-02). INCLUDE (2) DOUBLE DUPLEX RECEPTACLES INSTALLED AT THIS TERMINAL BOARD SERVED FROM (2) 20A-120V-1Ø DEDICATED CIRCUITS. REFER TO COMMUNICATION RISER DIAGRAM ON DRAWING #EO-02 FOR ADDITIONAL INFORMATION.
- 4 ROUTE BRANCH CIRCUITING FOR RECEPTACLES AT THIS LOCATION VERTICALLY AT EACH FLOOR. PROVIDE HOMERUN AS SHOWN ON FOURTH FLOOR.

GENERAL POWER AND COMMUNICATION PLAN NOTES

- EXACT LOCATION OF MECHANICAL, PLUMBING, KITCHEN, FURNITURE SYSTEMS, OWNER FURNISHED EQUIPMENT, ETC. THAT REQUIRE ELECTRICAL CONNECTIONS ARE SHOWN ON THE MECHANICAL, PLUMBING, AND/OR ARCHITECTURAL DRAWINGS. COORDINATE EXACT LOCATIONS WITH RESPECTIVE CONTRACTORS AND/OR VENDORS PRIOR TO ANY ROUGH-INS.
- PRIOR TO ROUGH-IN, REVIEW AND COORDINATE WITH ALL OTHER TRADES' CONTRACT DOCUMENTS TO DETERMINE SPECIFIC MOUNTING LOCATIONS AND ELECTRICAL REQUIREMENTS (VOLTAGE, PHASE, KW, HP, CONNECTION TYPE, ETC.) FOR HVAC AND PLUMBING EQUIPMENT. COORDINATE EXACT MOUNTING LOCATIONS WITH THE SPECIFIC TRADE AND ARCHITECT.
- REFER TO WIRING SCHEDULE ON SHEET #EO.03A/B/C FOR 15A/20A RECEPTACLE BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

who
engineering


2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title
**FOURTH FLOOR POWER
PLAN**

Date: 03.05.2026	Project Number: 24-065
Drawn By: DJS	Drawing Number: E2.04B
Checked By: KDS	
Approved: GSS	

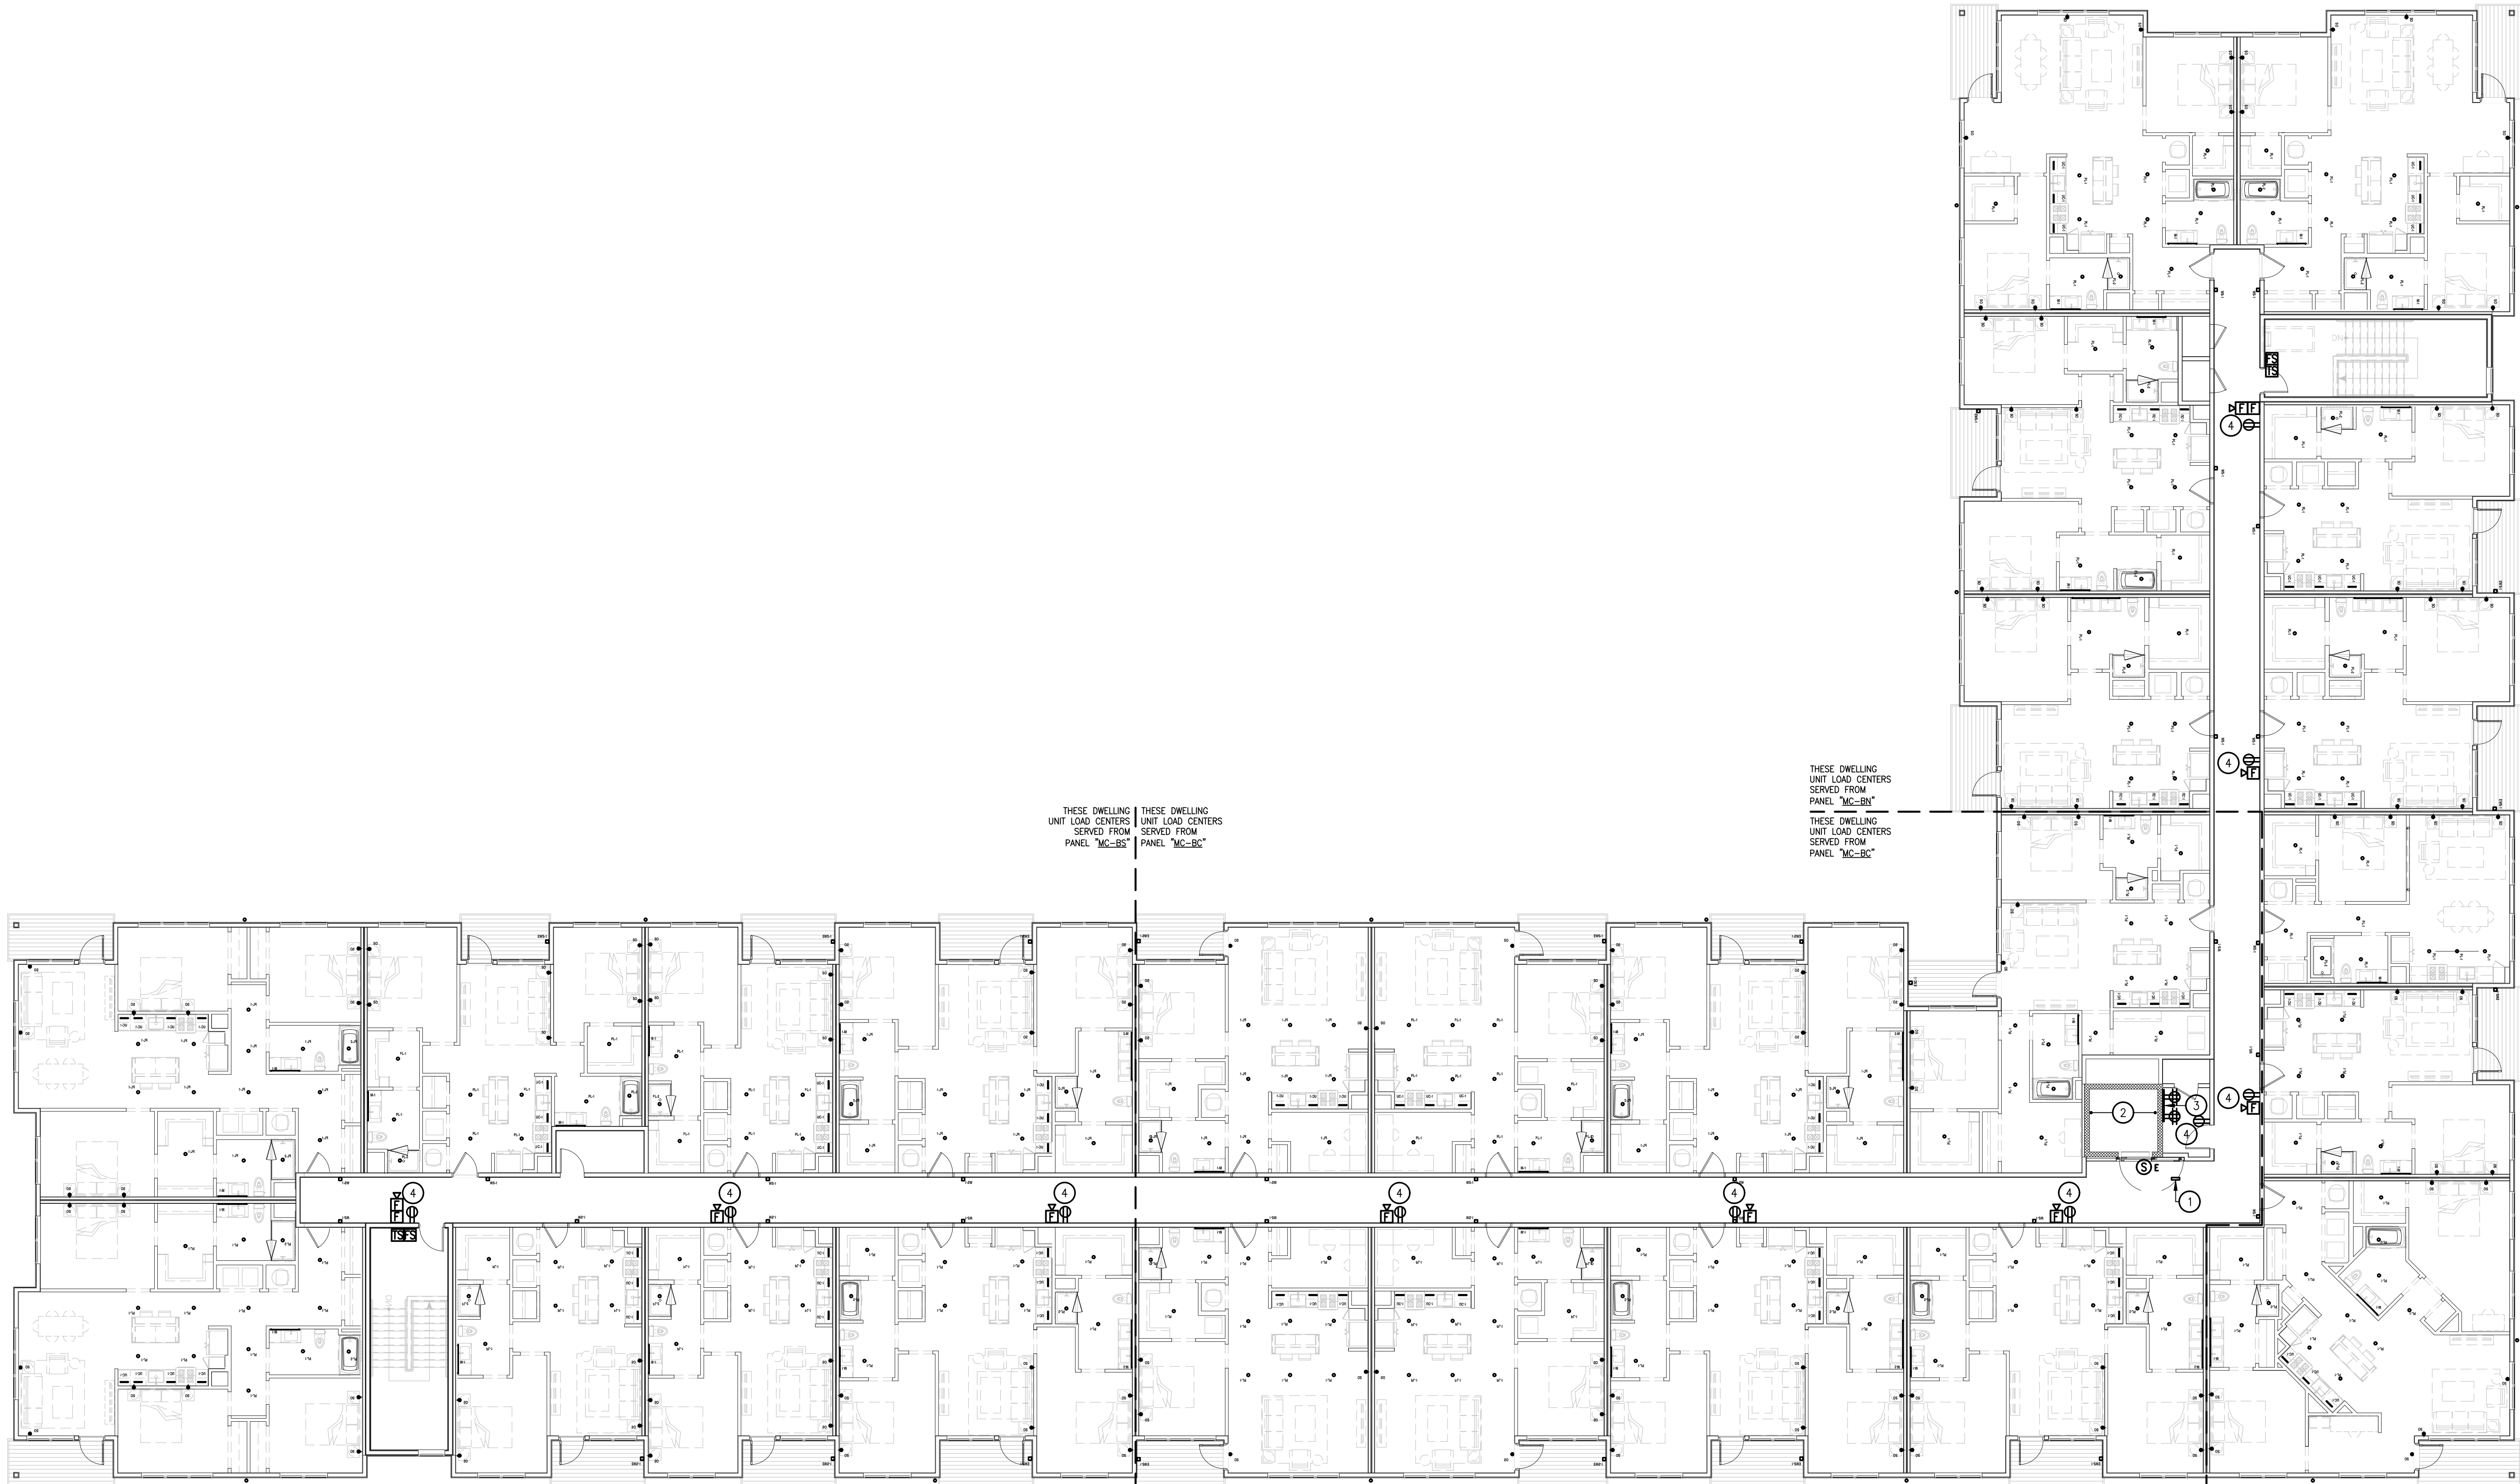


1
E2.04B
BUILDING B
FOURTH FLOOR POWER PLAN
SCALE: 3/32" = 1'-0"

CODED NOTES

- ① DWELLING UNIT HEAT PUMPS TO BE POWERED FROM RESPECTIVE TENANT PANEL. REFER TO TYPICAL DWELLING UNIT APPLIANCE CONNECTION SCHEDULE ON SHEET #E3-00 FOR LOAD INFORMATION, CIRCUIT BREAKER, DISCONNECT, AND CONDUCTOR SIZING.

GENERAL POWER AND COMMUNICATION PLAN NOTES

- EXACT LOCATION OF MECHANICAL, PLUMBING, KITCHEN, FURNITURE SYSTEMS, OWNER FURNISHED EQUIPMENT, ETC. THAT REQUIRE ELECTRICAL CONNECTIONS ARE SHOWN ON THE MECHANICAL, PLUMBING, AND/OR ARCHITECTURAL DRAWINGS. COORDINATE EXACT LOCATIONS WITH RESPECTIVE CONTRACTORS AND/OR VENDORS PRIOR TO ANY ROUGH-INS.
- PRIOR TO ROUGH-IN, REVIEW AND COORDINATE WITH ALL OTHER TRADES' CONTRACT DOCUMENTS TO DETERMINE SPECIFIC MOUNTING LOCATIONS AND ELECTRICAL REQUIREMENTS (VOLTAGE, PHASE, KW, HP, CONNECTION TYPE, ETC.) FOR HVAC AND PLUMBING EQUIPMENT. COORDINATE EXACT MOUNTING LOCATIONS WITH THE SPECIFIC TRADE AND ARCHITECT.
- REFER TO WIRING SCHEDULE ON SHEET #E0.03A/B/C FOR 15A/20A RECEPTACLE BRANCH CIRCUITS FOR ALL CONDUCTOR SIZES TO ACCOUNT FOR VOLTAGE DROP.
- ALL WIRING SHALL BE IDENTIFIED BY PANELBOARD AND CIRCUIT NUMBER(S) IN ALL CABINETS, JUNCTION BOXES, WIRING TROUGHS, ENCLOSURES, SPLICE OR TERMINATION POINTS, ETC.
- A NEW TYPED PANELBOARD DIRECTORY CARD SHALL BE PROVIDED FOR ALL PANELS INSTALLED OR MODIFIED UNDER THIS CONTRACT. NEW DIRECTORY CARDS SHALL BE LOCATED ON THE INSIDE DOOR OF ASSOCIATED PANELS.

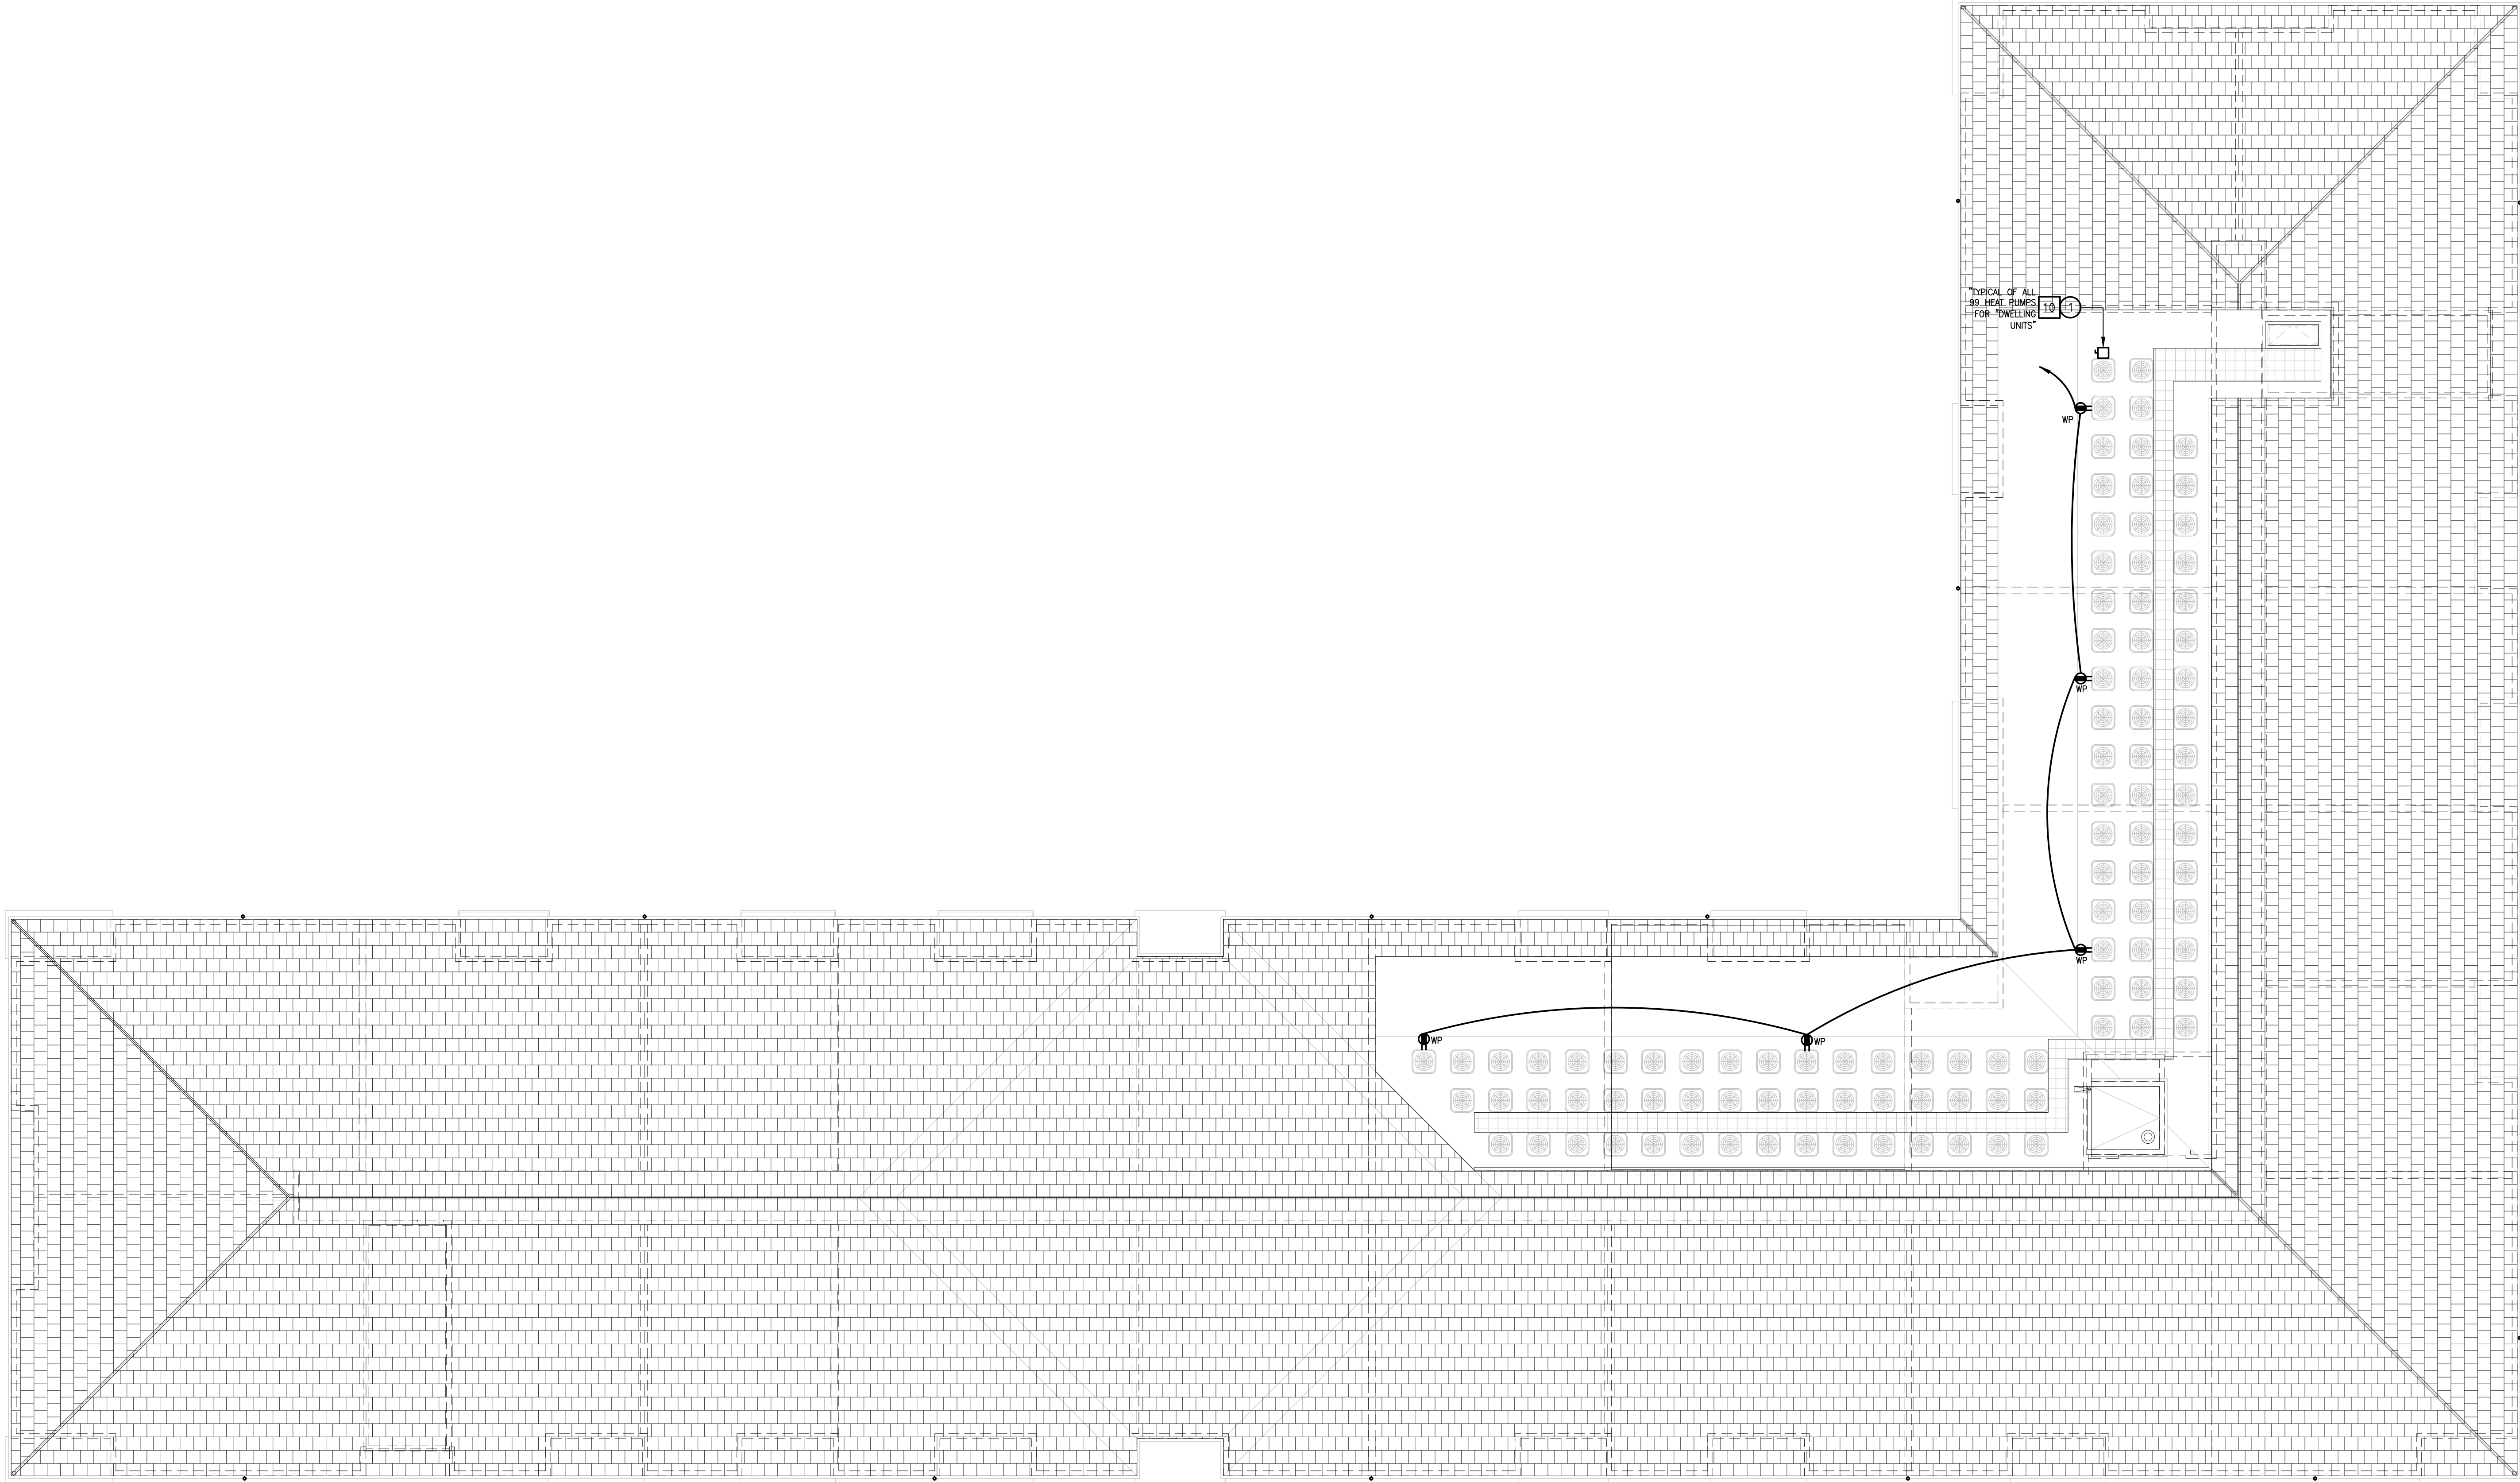

Seal

NOT FOR
CONSTRUCTION

Issue:	Date:	By:
SCHEMATIC DESIGN	01.07.26	BAC
DESIGN DEVELOPMENT	03.05.26	BAC

whs
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

3455 W. Dublin Granville Rd,
Columbus OH, 43235

Drawing Title
**ROOF LEVEL POWER
PLAN**

Date:
03.05.2026

Project Number:
24-065

Drawn By:
DJS

Drawing Number:

Checked By:
KDS

Approved:
GSS

E2.05B

GENERAL "DWELLING UNIT" ELECTRICAL CONSTRUCTION NOTES

- A. EQUIPMENT AND MATERIALS USED ON THIS PROJECT SHALL BE NEW AND U.L. LABELED FOR THE APPLICATION.
- B. WORK SHALL BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE PROVISIONS OF LOCAL AND STATE CODES AS WELL AS THE CURRENT EDITION OF THE NATIONAL ELECTRICAL CODE (NEC), AS INTERPRETED BY THE LOCAL AUTHORITY HAVING JURISDICTION.
- C. MATERIAL OR LABOR WHICH IS NOT INDICATED ON THE DRAWINGS OR SPECIFICATION BUT WHICH IS OBVIOUSLY NECESSARY TO COMPLETE THE WORK SHALL BE PROVIDED. DRAWINGS AND SPECIFICATIONS ARE TO BE CONSIDERED AS SUPPLEMENTING EACH OTHER.
- D. VISIT THE SITE OF THE WORK AND BECOME FAMILIAR WITH CONDITIONS AFFECTING THE INSTALLATION. SUBMISSION OF A PROPOSAL SHALL PRESUPPOSE KNOWLEDGE OF SUCH CONDITIONS AND NO ADDITIONAL COMPENSATION SHALL BE ALLOWED WHERE EXTRA LABOR OR MATERIALS ARE REQUIRED BECAUSE OF IGNORANCE OF THESE CONDITIONS.
- E. WHERE LIGHT SWITCHES ARE SHOWN ADJACENT TO ONE ANOTHER, THEY SHALL BE GROUPED TOGETHER INTO A 2, 3, OR 4 GANG DEVICE BOX WITH COMMON COVERPLATE.
- F. BACK BOXES IN DEMISING WALLS SHALL NOT BE ROUGHED-IN BACK TO BACK IN THE SAME STUD SPACE. PROVIDE FIRE-STOPPING AS REQUIRED TO MAINTAIN FIRE RATING.
- G. ELECTRICAL BOXES, ELECTRICAL EQUIPMENT, ETC. MUST BE FIRESTOPPED UNDER THE FOLLOWING CONDITIONS: BOXES LARGER THAN 16 SQUARE INCHES, IF HORIZONTAL SPACING BETWEEN BOXES IS LESS THAN 24 INCHES. WHEN MULTIPLE BOXES ARE LOCATED IN ONE STUD CAVITY OR IF THE AGGREGATE OF ALL BOXES EXCEEDS 100 SQUARE INCHES PER 100 SQUARE FEET. REFER TO LISTED SYSTEM DETAILS AND APPLICABLE LOCAL BUILDING CODE REQUIREMENTS.
- H. WHERE ELECTRICAL EQUIPMENT, OUTLET BOXES, ETC. ARE INSTALLED IN A FIRE RATED ASSEMBLY AND AS REQUIRED UNDER THE PARAMETERS LISTED ABOVE, FIRE (PUTTY) PADS SHALL BE PROVIDED TO MAINTAIN THE INTEGRITY OF THE FIRE RATED ASSEMBLY.
- I. WHEN ELECTRICAL EQUIPMENT, OUTLET BOXES, ETC. ARE INSTALLED IN A STUD PARTITION WHERE ADJACENT ROOMS ARE SIMILAR, THE OUTLETS SHALL BE STAGGERED AND FIRE RATED (PUTTY) PADS SHALL ALSO BE INSTALLED.
- J. FIRE RATED (PUTTY) PADS SHALL BE 3M "FIRE BARRIER MOLDABLE PUTTY PADS MPP+", FIRE RATED PRODUCTS SPECIALTIES CORPORATION TYPE "FRPS" ENCLOSURES, OR APPROVED EQUAL PRIOR TO PLACING BASE BID PRICE.
- K. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE FIRE RATING OF ALL CEILINGS, STRUCTURES, ETC. IN COMPLIANCE WITH ALL STANDARDS. WHERE BACK BOXES ARE REQUIRED TO BE INSTALLED TO SERVE LIGHT FIXTURES IN FIRE RATED CEILINGS, FIRE (PUTTY) PADS SHALL BE PROVIDED.
- L. REFER TO ARCHITECTURAL ELEVATIONS FOR MOUNTING LOCATION AND HEIGHT OF ALL WIRING DEVICES.
- M. COORDINATE THE EXACT LOCATION OF ALL RECEPTACLES AT CABINET LOCATIONS WITH G.C. CUT AND PATCH AS DIRECTED BY THE G.C.
- N. ALL DEVICES SHALL BE RESIDENTIAL GRADE, 15/20 AMP DEVICES. RECEPTACLES SHALL BE TAMPER RESISTANT TYPE IN COMPLIANCE WITH N.E.C. #406.12.
- O. SMOKE DETECTORS MUST BE INSTALLED FREE OF DUST OR ANY OTHER CONTAMINATION. LOCATE A MINIMUM OF 3'-0" FROM ALL SUPPLY AIR DIFFUSERS. LOCATE A MINIMUM OF 1'-0" FROM ANY PART OF ANY LIGHTING FIXTURES. DO NOT LOCATE ABOVE PENDANT MOUNTED OR INDIRECT LIGHTING FIXTURES. DO NOT LOCATE ABOVE CEILING FANS.
- P. IN ALL SINGLE, OR, MULTI-FAMILY DWELLING UNITS, RECEPTACLES SHALL BE LOCATED AND INSTALLED IN ACCORDANCE WITH THE CURRENT EDITION OF THE N.E.C. ELECTRICAL EQUIPMENT, DEVICES, ETC. SHALL BE INSTALLED AND SPACED AS DIRECTED BY THE N.E.C. WITH SPECIFIC ATTENTION TO ARTICLE #210.52(A) THROUGH #210.52(I).
- Q. ALL PENETRATIONS IN FIRE RATED FLOORS, SHAFTS AND WALLS SHALL BE FIRE STOPPED. THE INSTALLATION OF FIRE STOPPING MATERIALS SHALL CONFORM TO THE LATEST FIRE RESISTANCE DIRECTORY AS PUBLISHED BY U.L.
- U. ALL RECEPTACLES SERVING KITCHEN COUNTER TOP SURFACES SHALL BE G.F.C.I. PROTECTED IN ACCORDANCE WITH N.E.C. ARTICLE #210.8(A)(6).
- V. ALL RECEPTACLES SHALL LOCATED WITHIN 6'-0" OF THE OUTSIDE OF ALL SINKS, SHOWER STALLS, AND, BATH TUBS SHALL BE G.F.C.I. PROTECTED IN ACCORDANCE WITH N.E.C. ARTICLE #210.8(A)(7).
- W. WHERE G.F.C.I. DEVICES ARE INSTALLED TO SERVE LARGE APPLIANCES, OR, APPLIANCES BELOW COUNTERTOP SURFACES, THE G.F.C.I. DEVICE SHALL BE READILY ACCESSIBLE AS REQUIRED BY N.E.C. ARTICLE #422.5 AND AS DEFINED BY N.E.C. ARTICLE #100. PROVIDE G.F.C.I. TYPE CIRCUIT BREAKERS WHERE APPLICABLE. PROVIDE PROPER IDENTIFICATION AT RELATED DEVICE LOCATIONS INDICATING "G.F.C.I. PROTECTED".
- X. PROVIDE ARC-FAULT PROTECTION FOR APPLICABLE BRANCH CIRCUITS IN ACCORDANCE WITH N.E.C. ARTICLE #210.12(A).

TYPICAL UNIT APPLIANCE/EQUIPMENT CONNECTION SCHEDULE									
·	APPLIANCE/EQUIPMENT DESCRIPTION	VOLTAGE/ PHASE	KW	CONNECTION TYPE			WIRE/CONDUIT SIZE	NOTE	S
				NEMA TYPE	DISCONNECT/SWITCH	HEIGHT			
1	REFRIGERATOR	120V-1ø	0.600	5-20R	—	54"	2ø12, 1ø12(G), 3/4"C.	1	
2	ELECTRIC RANGE/OVEN	120/ 208V-1ø	8.000	14-50R	—	VERIFY	3ø6, 1ø10(G), 1"C.	1	
3A	RANGE HOOD (ADA UNITS)	120V-1ø	0.480		DIRECT	VERIFY	2ø12, 1ø12(G), 3/4"C.	1,4	
3B	RANGE HOOD/MICROWAVE	120V-1ø	1.680	5-20R	—	VERIFY	2ø12, 1ø12(G), 3/4"C.	1	
4	DISHWASHER	120V-1ø			—	SEE NOTE 2	2ø12, 1ø12(G), 3/4"C.	1,2	
5	DISPOSER	120V-1ø	1.200	5-20R	—				
6	WASHING MACHINE/LAUNDRY	120V-1ø	1.500	5-20R	—	42"	2ø12, 1ø12(G), 3/4"C.	1	
7	ELECTRIC DRYER	120/ 208V-1ø	5.000	14-30R	—	42"	3ø10, 1ø10(G), 3/4"C.	1	
8	ELECTRIC WATER HEATER	208V-1ø	4.500	—	30A-2P, NEMA 1	AT UNIT	2ø10, 1ø10(G), 3/4"C.	1,6	
9A	1.5 TON AIR HANDLER	208V-1ø	4.784	—	30A-2P, NEMA 1	AT UNIT	2ø10, 1ø10(G), 3/4"C.	1,6	
9B	2 TON AIR HANDLER	208V-1ø	5.824	—	30A-2P, NEMA 1	AT UNIT	2ø10, 1ø10(G), 3/4"C.	1,6	
9C	2.5 TON AIR HANDLER	208V-1ø	8.528	—	60A-2P, NEMA 1	AT UNIT	2ø6, 1ø10(G), 1"C.	1,6	
10A	1.5 TON ROOFTOP HEAT PUMP	208V-1ø	2.080	—	30A-2P, NEMA 3R	AT UNIT	2ø10, 1ø10(G), 3/4"C.	1,5	
10B	2 TON ROOFTOP HEAT PUMP	208V-1ø	2.704	—	30A-2P, NEMA 3R	AT UNIT	2ø10, 1ø10(G), 3/4"C.	1,5	
10C	2.5 TON ROOFTOP HEAT PUMP	208V-1ø	3.328	—	30A-2P, NEMA 3R	AT UNIT	2ø8, 1ø10(G), 3/4"C.	1,5	
11	EXHAUST FAN	120V-1ø	0.055	—	INTEGRAL	CEILING	2ø12, 1ø12(G), 3/4"C.	1,3	

APPLIANCE/EQUIPMENT CONNECTION SCHEDULE NOTES:

- VERIFY ALL EQUIPMENT SPECIFICATIONS (VOLTAGE, CONNECTION, ETC.) WITH OWNER AND/OR ARCHITECT PRIOR TO PLACING PURCHASE ORDER FOR DEVICES AND ROUGH-IN. VERIFY THE EXACT MOUNTING HEIGHT WITH ARCHITECTURAL ELEVATIONS, MILLWORK, ETC. PRIOR TO ROUGH-IN.
- PROVIDE A DUPLEX RECEPTACLE TO SERVE DISHWASHER AND DISPOSER PROTECTED BY AN UPSTREAM GFCI TYPE CIRCUIT BREAKER. COORDINATE LOCATION OF DEVICE IN MILLWORK WITH ARCHITECT/G.C. AT ISLAND LOCATIONS, INSTALL AN AIR PUSH BUTTON TYPE BUTTON (PROVIDED BY P.C.) FOR CONTROL OF DISHWASHER. INCLUDE ALL COSTS OF CORE DRILLING MILLWORK/SINK TO INSTALL PUSH BUTTON. ENSURE INSTALLED BUTTON ALLOWS FOR DISHWASHER TO BE SERVED BY THE SAME RECEPTACLE. AT NON-ISLAND KITCHEN COUNTER LOCATIONS, PROVIDE A SINGLE POLE SWITCH AT THE KITCHEN BACKSPLASH (FINAL LOCATION BY ARCHITECT). SPLIT-WIRE THE RECEPTACLE AND WIRE SUCH THE SWITCH ONLY CONTROLS THE TOP OUTLET. **ALL FINAL DEVICE LOCATIONS SHALL BE ADA COMPLIANT IN ADA COMPLIANT UNITS.**
- CONNECT TO INTEGRAL DISCONNECT SWITCH AND CONNECT TO APARTMENT UNIT LIGHTING CIRCUIT. VERIFY EXACT REQUIREMENTS WITH EQUIPMENT. WIRE SUCH THAT EXHAUST FAN RECEIVES CONSTANT LINE VOLTAGE POWER AHEAD OF ALL SWITCHING AND CONTROL. **REFER TO DETAIL ON THIS SHEET.**
- PROVIDE A REDUNDANT (3-WAY) SWITCH IN ADA UNITS FOR CONTROL OF RANGE HOOD. SWITCH SHALL BE LOCATED IN ADA-COMPLIANT LOCATION. MODIFY RANGE HOOD WIRING AS REQUIRED (REFER TO HOOD UNIT WIRING DIAGRAM) FOR ADDITIONAL CONTROL LOCATION.
- BRANCH CIRCUITING SIZED TO ACCOUNT FOR VOLTAGE DROP.
- INSTALL DISCONNECT IN CLOSET SUCH THAT NEC #110.26 WORKING CLEARANCE IS MAINTAINED.

DWELLING UNIT LUMINAIRE SCHEDULE

TYPE	LAMP	WATTAGE	VOLTAGE	DIMMING TYPE	DESCRIPTION	CATALOG NUMBER	EQUIVALENT MANUFACTURER/REMARKS
M-1	—	—	120	—	LED MIRROR LIGHT USED IN BATHROOMS.	—	—
PL-1	—	—	120	—	LED PENDANT LIGHT USED THROUGHOUT THE UNITS.	—	—
PL-2	—	—	120	—	LED PENDANT USED OVER BATHROOM SHOWERS.	—	—
UC-1	—	—	120	—	LED UNDERCOUNTER LIGHT USED IN KITCHEN AREA.	—	—

LUMINAIRE SCHEDULE GENERAL NOTES:

- VERIFY ALL LUMINAIRE COLORS, TRIMS, LENGTHS, ETC. WITH THE **ARCHITECT/OWNER/DEVELOPER/DESIGNER** PRIOR TO PLACING FINAL PURCHASE ORDERS. SUBMISSION OF SHOP DRAWINGS WILL BE INTERPRETED AS HAVING BEEN COORDINATED WITH THE AFOREMENTIONED PARTIES.
- PROVIDE ALL LENGTHS, FEEDS, ACCESSORIES, CONNECTORS, WIRING, POWER SUPPLIES, DRIVERS, ETC. FOR A COMPLETE INSTALLATION. VERIFY THE COMPLETE BILL OF MATERIAL WITH MANUFACTURER'S REPRESENTATIVE AND ENSURE ALL EQUIPMENT IS INCLUDED IN BID PRICE. COORDINATE INSTALLATION WITH ARCHITECTURAL DETAILS.
- VERIFY FINAL LUMINAIRE LOCATIONS WITH OTHER CEILING MOUNTED EQUIPMENT SUCH AS DIFFUSERS, FIRE ALARM DEVICES, SPEAKERS, ETC., WITH ARCHITECTURAL REFLECTED CEILING PLANS.
- VERIFY EXACT MOUNTING HEIGHT AND LOCATIONS OF ALL WALL MOUNTED AND PENDANT MOUNTED LUMINAIRES WITH ARCHITECTURAL PLANS AND ELEVATIONS PRIOR TO ROUGH-IN.
- ANY PROPOSED ALTERNATE LUMINAIRES SHALL BE APPROVED BY THE **ARCHITECT/OWNER/DEVELOPER/DESIGNER** PRIOR TO FINAL BID PRICING.
- SHOULD THE CONTRACTOR PROPOSE TO FURNISH MATERIALS, EQUIPMENT, AND DEVICES, OTHER THAN THOSE SPECIFIED AND LISTED, THE CONTRACTOR SHALL SUBMIT A WRITTEN REQUEST FOR SUBSTITUTIONS, TO THE ENGINEER AT LEAST TEN (10) BUSINESS DAYS PRIOR TO BID OPENING. THE REQUEST SHALL BE AN ALTERNATE TO THE ORIGINAL BID AND SHALL INCLUDE A COMPLETE SPECIFICATIONS CUT SHEET SUBMITTAL AS OUTLINED IN THE SPECIFICATIONS, COMPLETE WITH DESCRIPTIVE (MANUFACTURER, BRAND NAME, CATALOG NUMBER, ETC.) AND TECHNICAL DATA FOR ALL ITEMS. INDICATE ANY ADDITIONS OR DEDUCTIONS TO THE CONTRACT PRICE WITH THE SUBSTITUTION SUBMITTAL AND ON THE BID FORM.
- ANY FINAL SELECTED/INSTALLED LIGHT FIXTURES WITHOUT A SPECIFICATION (OR TO BE SPECIFIED LATER BY **ARCHITECT/OWNER/DEVELOPER/DESIGNER**) LISTED IN THIS SCHEDULE SHALL NOT EXCEED THE WATTAGE LISTED, SHALL NOT HAVE A LOWERED DELIVERED LUMENS (IF LISTED), AND SHALL MATCH THE COLOR TEMPERATURE (IF LISTED).

TYPICAL DWELLING UNIT PANEL SCHEDULE									
NAME: TP1		VOLTAGE: 120/ 208 -1ø-3W							
MINIMUM KAIC: 10		TYPE: FLUSH MOUNTED							
MCR: 125A MLO		KWD: SEE ADJACENT CALC.							
CKT	DESCRIPTION	C/B	ø	C/B	DESCRIPTION	CKT			
A/G	1 SMALL APPLIANCE REC.	20/1	A	20/1	REFRIGERATOR	2	A/G		
A/G	3 SMALL APPLIANCE REC.	20/1	B	50/2	ELECTRIC RANGE	4	G2		
A	5 LIVING REC.	20/1	A			6			
G	7 BATHROOM REC.	20/1	B	20/1	RANGE HOOD/MICRO.	8	A/G		
A	9 LIGHTING/S.D.	20/1	A	20/1	DISHWASHER/DISPOSER	10	A/G		
A	11 BEDROOM REC.	20/1	B	20/1	WASHING MACHINE	12	A/G		
13	SPACE	—	A						
15	SPACE	—	B	30/2	ELECTRIC DRYER	14	G2		
17						16			
19						18			
	SURGE PROTECTION	—	A	30/2	ELECTRIC WATER HEATER	20			
			B						
21						22			
23	AIR HANDLER	25/2	A	15/2	ROOFTOP HEAT PUMP	24			

TYPICAL DWELLING UNIT PANEL SCHEDULE NOTES:

Δ: PROVIDE AN ARC-FAULT CIRCUIT INTERRUPTER (AFCI) TYPE CIRCUIT BREAKER FOR THIS BRANCH CIRCUIT.

⊘: PROVIDE GROUND-FAULT CIRCUIT INTERRUPTER (GFCI) PROTECTION FOR THIS BRANCH CIRCUIT. PROVIDE A GFCI-TYPE CIRCUIT BREAKER IF GFCI-TYPE RECEPTACLES/DEVICES ARE NOT PROVIDED DOWNSTREAM ON THIS BRANCH CIRCUIT.

⊘2: PROVIDE A GROUND-FAULT CIRCUIT INTERRUPTER (GFCI) TYPE CIRCUIT BREAKER FOR THIS BRANCH CIRCUIT.

TYPICAL DWELLING UNIT PANEL SCHEDULE									
NAME: TP2		VOLTAGE: 120/ 208 -1ø-3W							
MINIMUM KAIC: 10		TYPE: FLUSH MOUNTED							
MCR: 125A MLO		KWD: SEE ADJACENT CALC.							
CKT	DESCRIPTION	C/B	ø	C/B	DESCRIPTION	CKT			
A/G	1 SMALL APPLIANCE REC.	20/1	A	20/1	REFRIGERATOR	2	A/G		
A/G	3 SMALL APPLIANCE REC.	20/1	B	50/2	ELECTRIC RANGE	4	G2		
A	5 LIVING REC.	20/1	A			6			
G	7 BATHROOM REC.	20/1	B	20/1	RANGE HOOD/MICRO.	8	A/G		
A	9 LIGHTING/S.D.	20/1	A	20/1	DISHWASHER/DISPOSER	10	A/G		
A	11 BEDROOM REC.	20/1	B	20/1	WASHING MACHINE	12	A/G		
A	13 BEDROOM REC.	20/1	A	30/2	ELECTRIC DRYER	14	G2		
G	15 BATHROOM REC.	20/1	B			16			
17			A	30/2	ELECTRIC WATER HEATER	18			
19			B			20			
	SURGE PROTECTION	—	A	30/2	ELECTRIC WATER HEATER	20			
			B						
21						22			
23	AIR HANDLER	30/2	A	20/2	ROOFTOP HEAT PUMP	24			

TYPICAL DWELLING UNIT PANEL SCHEDULE NOTES:

Δ: PROVIDE AN ARC-FAULT CIRCUIT INTERRUPTER (AFCI) TYPE CIRCUIT BREAKER FOR THIS BRANCH CIRCUIT.

⊘: PROVIDE GROUND-FAULT CIRCUIT INTERRUPTER (GFCI) PROTECTION FOR THIS BRANCH CIRCUIT. PROVIDE A GFCI-TYPE CIRCUIT BREAKER IF GFCI-TYPE RECEPTACLES/DEVICES ARE NOT PROVIDED DOWNSTREAM ON THIS BRANCH CIRCUIT.

⊘2: PROVIDE A GROUND-FAULT CIRCUIT INTERRUPTER (GFCI) TYPE CIRCUIT BREAKER FOR THIS BRANCH CIRCUIT.


TYPICAL DWELLING UNIT PANEL SCHEDULE									
NAME: TP3		VOLTAGE: 120/ 208 -1ø-3W							
MINIMUM KAIC: 10		TYPE: FLUSH MOUNTED							
MCR: 150A MLO		KWD: SEE ADJACENT CALC.							
CKT	DESCRIPTION	C/B	ø	C/B	DESCRIPTION	CKT			
A/G	1 SMALL APPLIANCE REC.	20/1	A	20/1	REFRIGERATOR	2	A/G		
A/G	3 SMALL APPLIANCE REC.	20/1	B	50/2	ELECTRIC RANGE	4	G2		
A	5 LIVING REC.	20/1	A			6			
G	7 BATHROOM REC.	20/1	B	20/1	RANGE HOOD/MICRO.	8	A/G		
A	9 LIGHTING/S.D.	20/1	A	20/1	DISHWASHER/DISPOSER	10	A/G		
A	11 BEDROOM REC.	20/1	B	20/1	WASHING MACHINE	12	A/G		
A	13 BEDROOM REC.	20/1	A	30/2	ELECTRIC DRYER	14	G2		
G	15 BATHROOM REC.	20/1	B			16			
17			A	30/2	ELECTRIC WATER HEATER	18			
19			B			20			
	SURGE PROTECTION	—	A	30/2	ELECTRIC WATER HEATER	20			
			B						
21						22			
23	INTERIOR AIR HANDLER	45/2	A	25/2	ROOFTOP HEAT PUMP	24			
			B						
A	25 BEDROOM REC.	20/1	A	—	SPACE	26			
			B	—	SPACE	28			
A	27 SPACE	—	B	—	SPACE				

TYPICAL DWELLING UNIT PANEL SCHEDULE NOTES:

Δ: PROVIDE AN ARC-FAULT CIRCUIT INTERRUPTER (AFCI) TYPE CIRCUIT BREAKER FOR THIS BRANCH CIRCUIT.

⊘: PROVIDE GROUND-FAULT CIRCUIT INTERRUPTER (GFCI) PROTECTION FOR THIS BRANCH CIRCUIT. PROVIDE A GFCI-TYPE CIRCUIT BREAKER IF GFCI-TYPE RECEPTACLES/DEVICES ARE NOT PROVIDED DOWNSTREAM ON THIS BRANCH CIRCUIT.

⊘2: PROVIDE A GROUND-FAULT CIRCUIT INTERRUPTER (GFCI) TYPE CIRCUIT BREAKER FOR THIS BRANCH CIRCUIT.

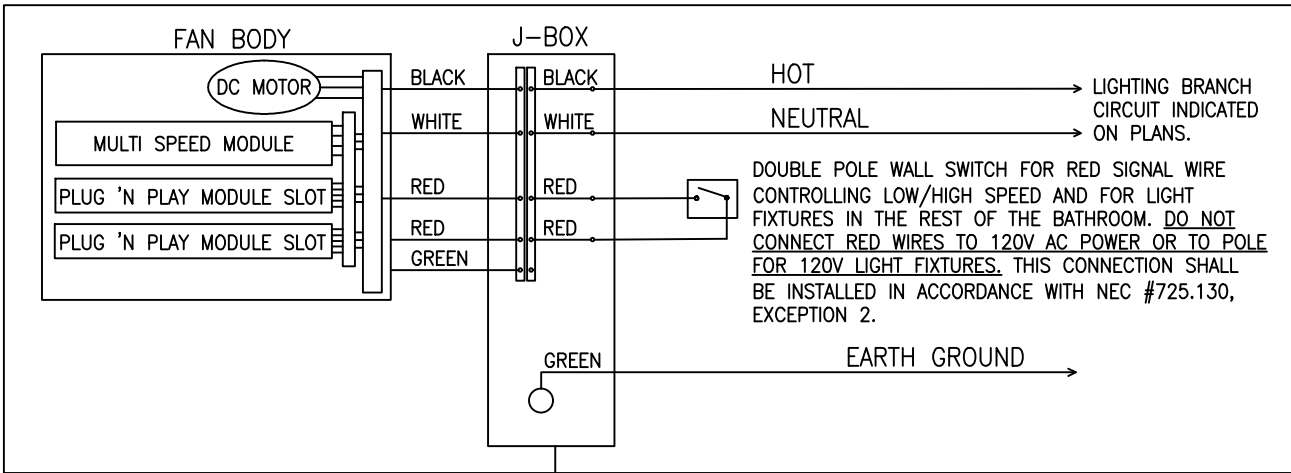

DWELLING UNIT BATHROOM EXHAUST FAN WIRING DIAGRAM
NO SCALE

Seal

NOT FOR
CONSTRUCTION

Issue: Date: By:
SCHEMATIC DESIGN 01.07.26 BAC
DESIGN DEVELOPMENT 03.05.26 BAC

who
engineering
2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

**3455 W. Dublin Granville Rd,
Columbus OH, 43235**

Drawing Title

**TYPICAL DWELLING UNIT
ELECTRICAL DETAILS**

Date

03.05.2026

Project Number

24-065

Drawn By

DJS

Drawing Number


Checked by

KDS


Approved

gss


E3.00B

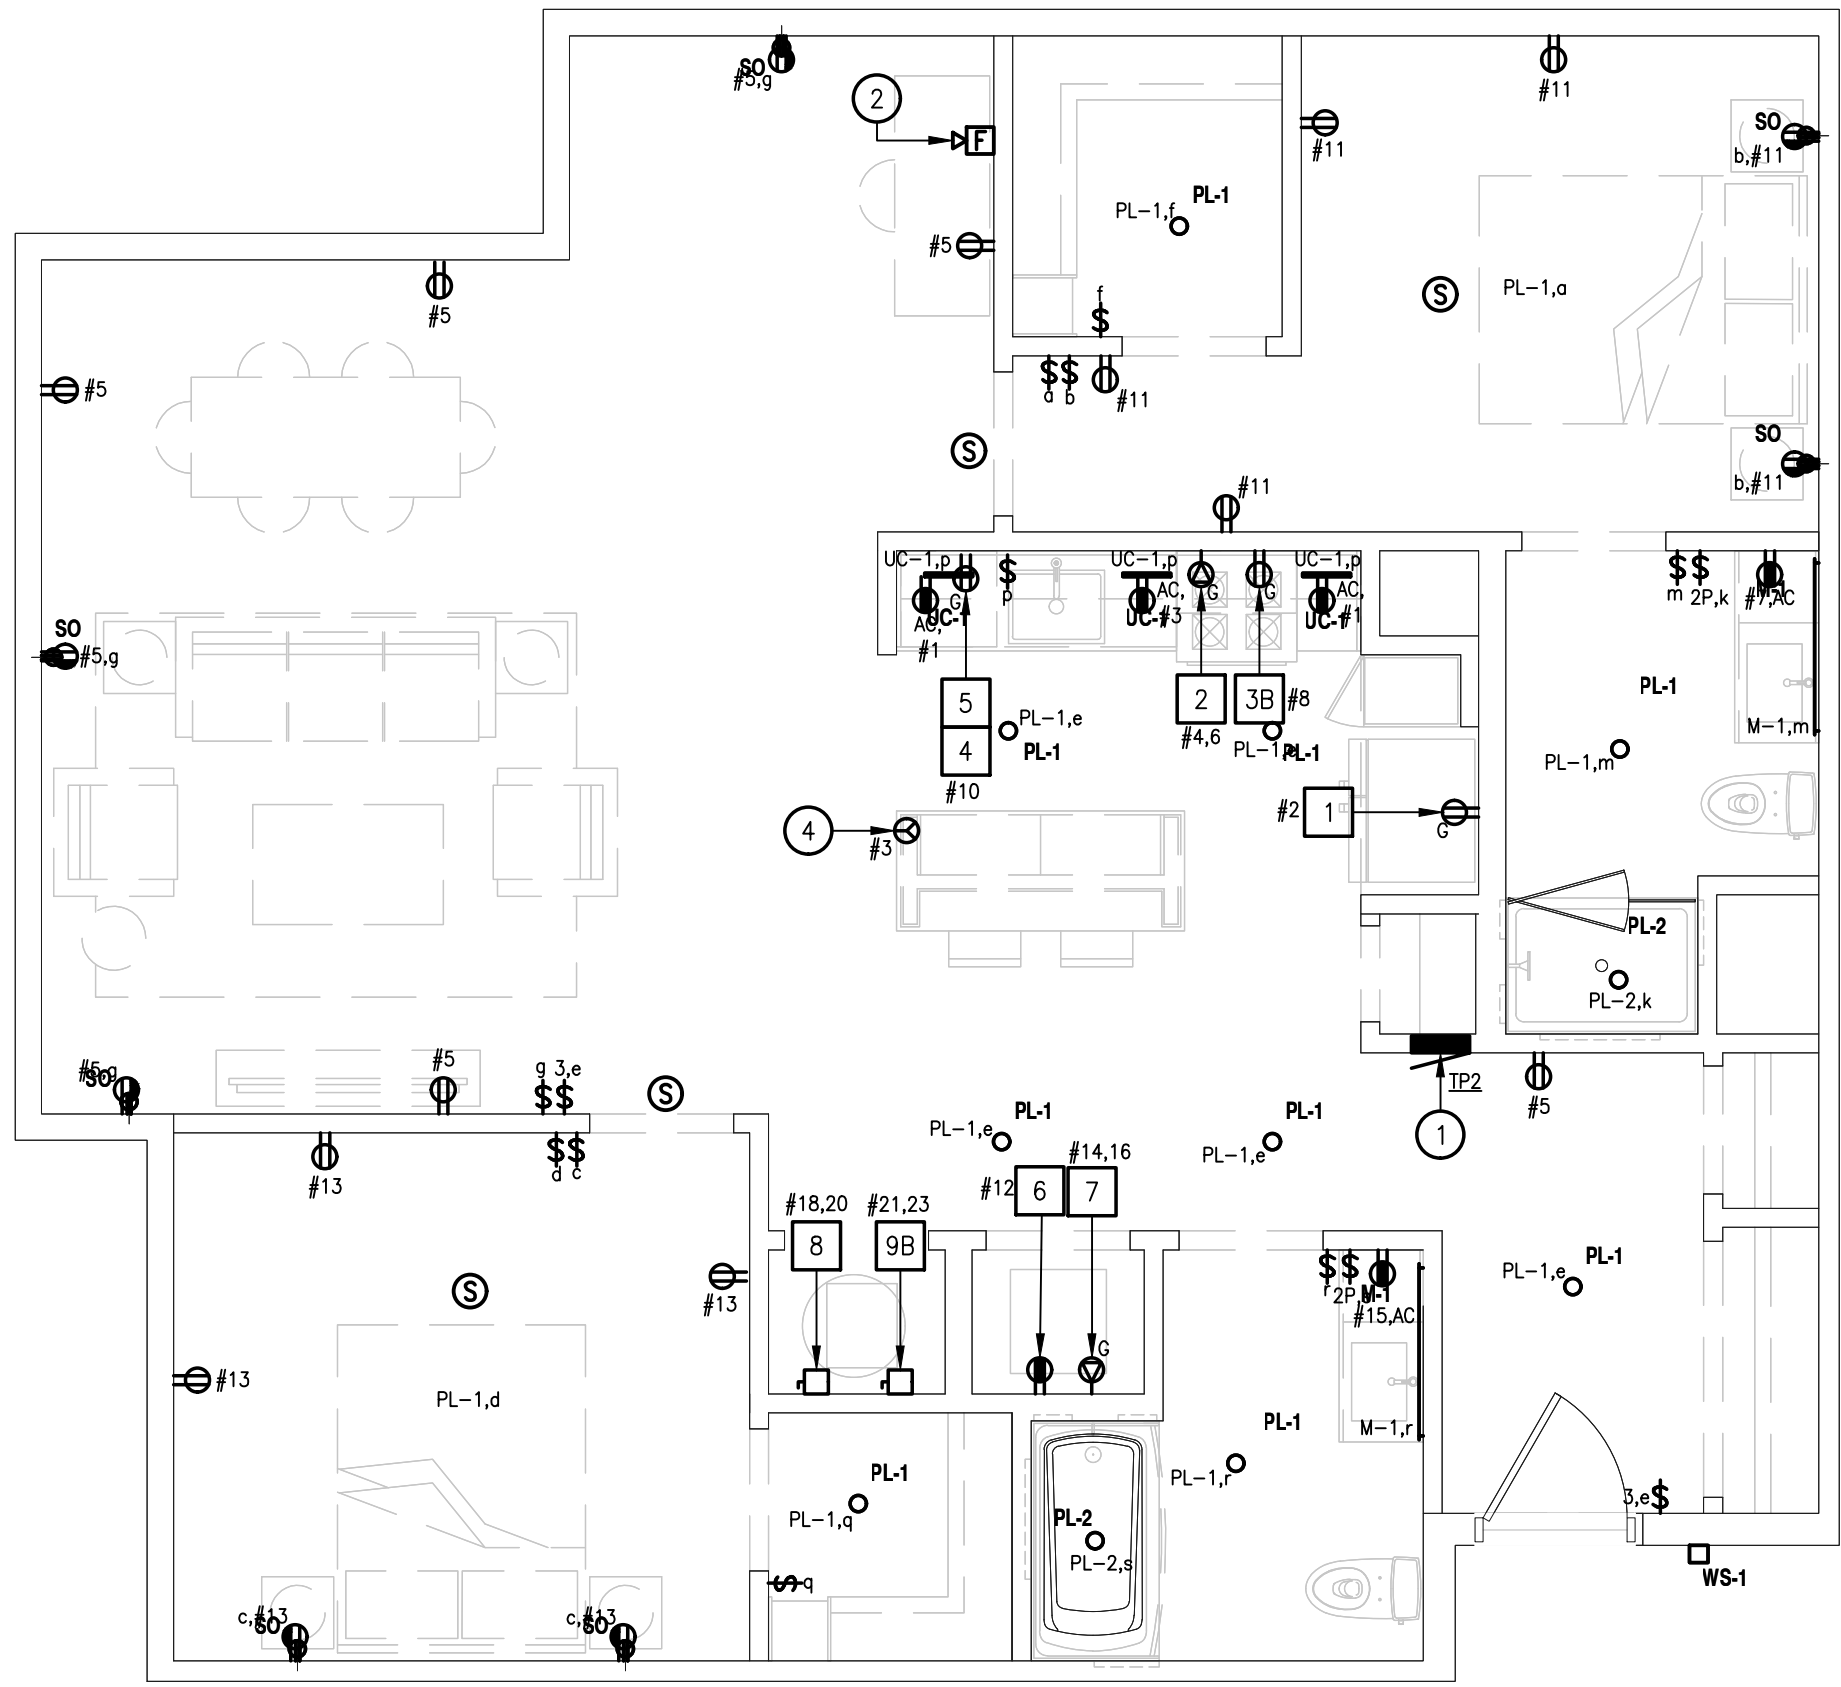


1
A3.02B
BUILDING 2
UNIT TYPE BD1 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

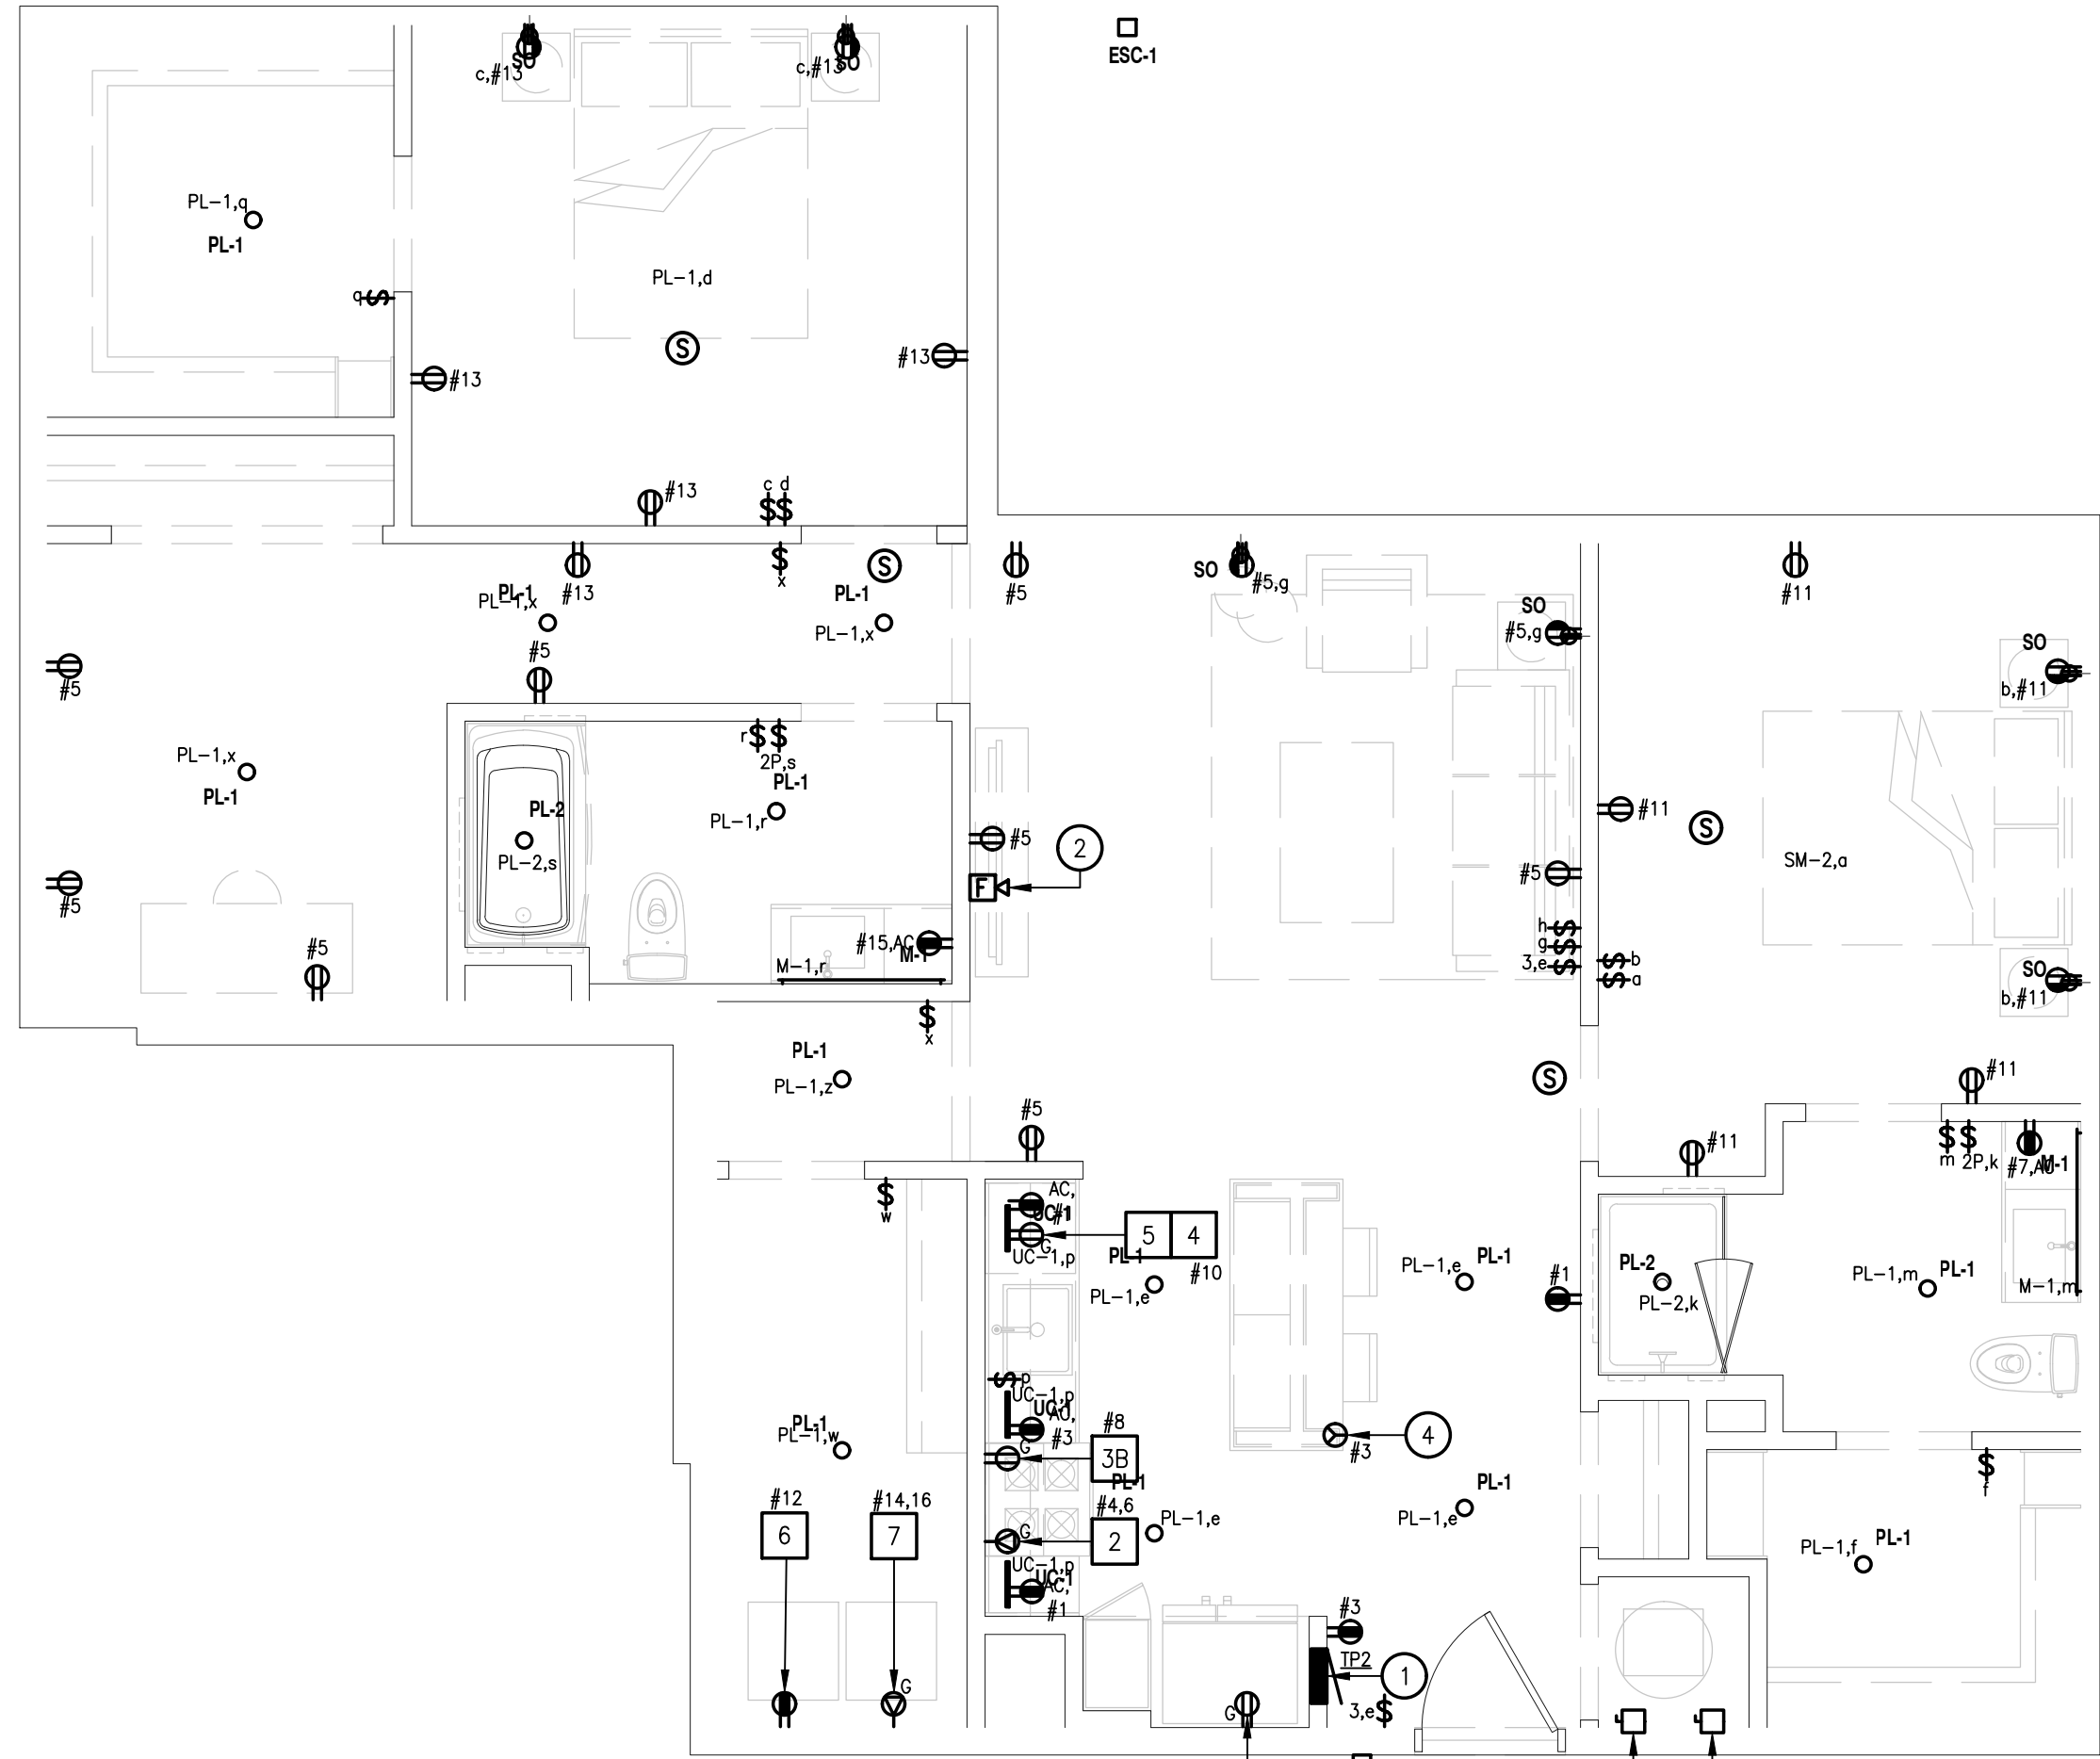


2
A3.02B
BUILDING 2
UNIT TYPE BD3.1 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

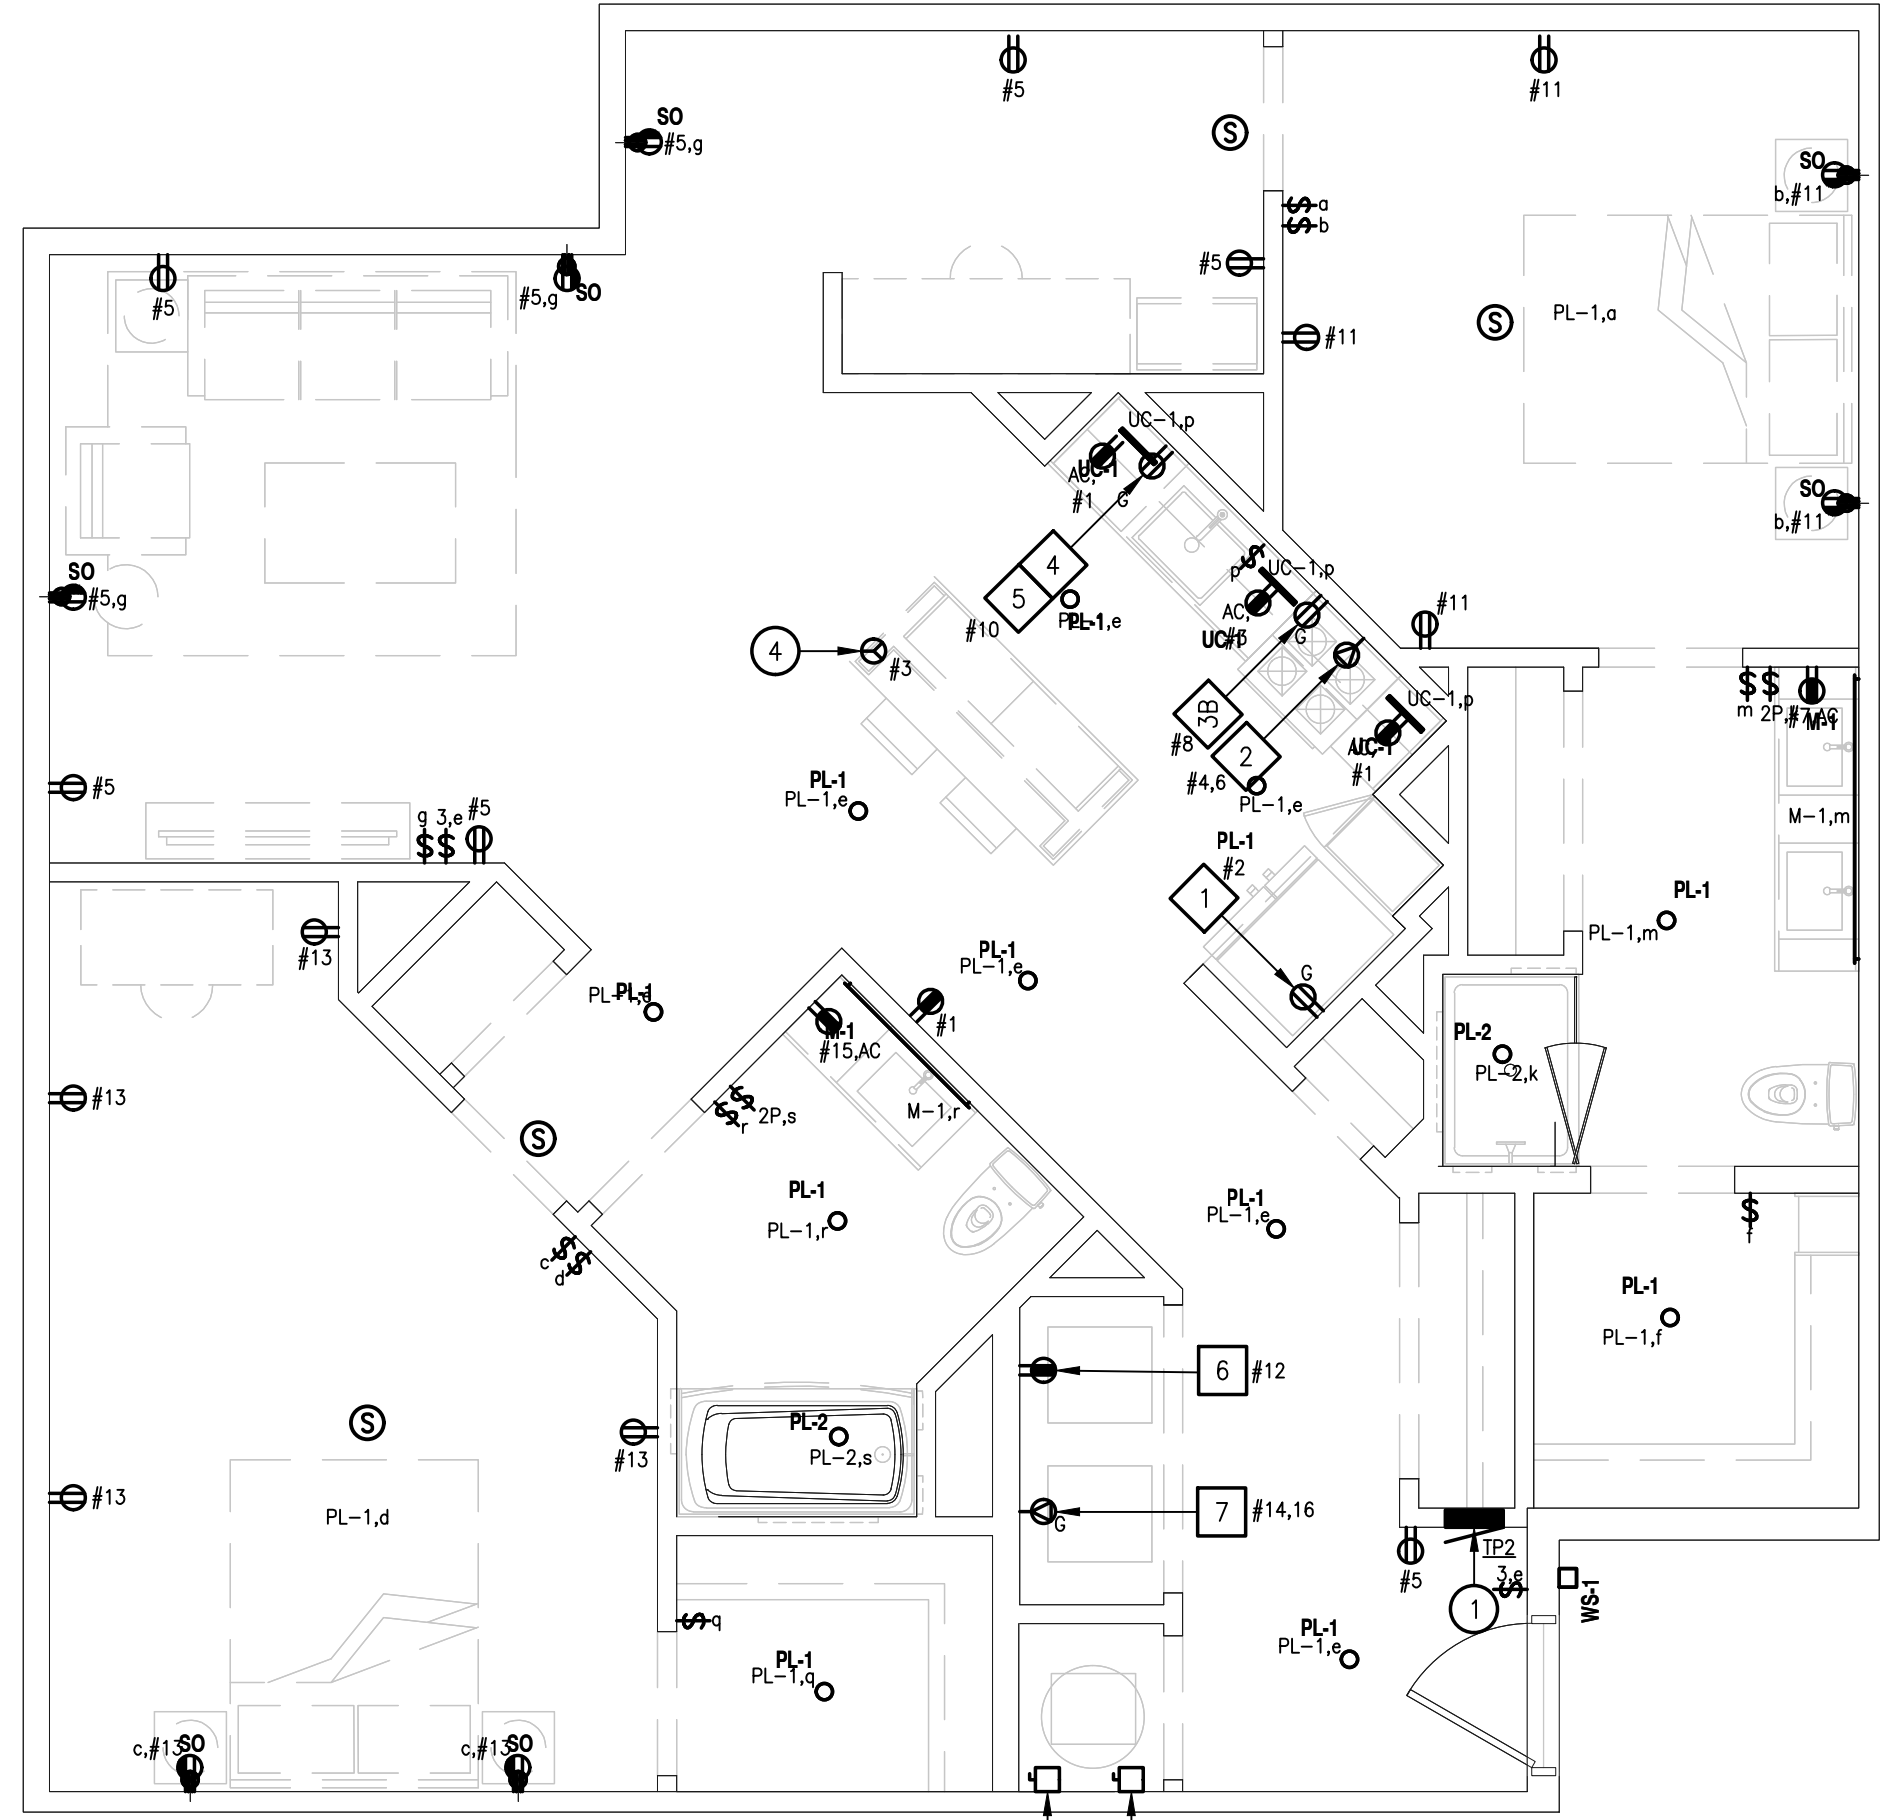

3
A3.02B
BUILDING 2
UNIT TYPE BD4 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

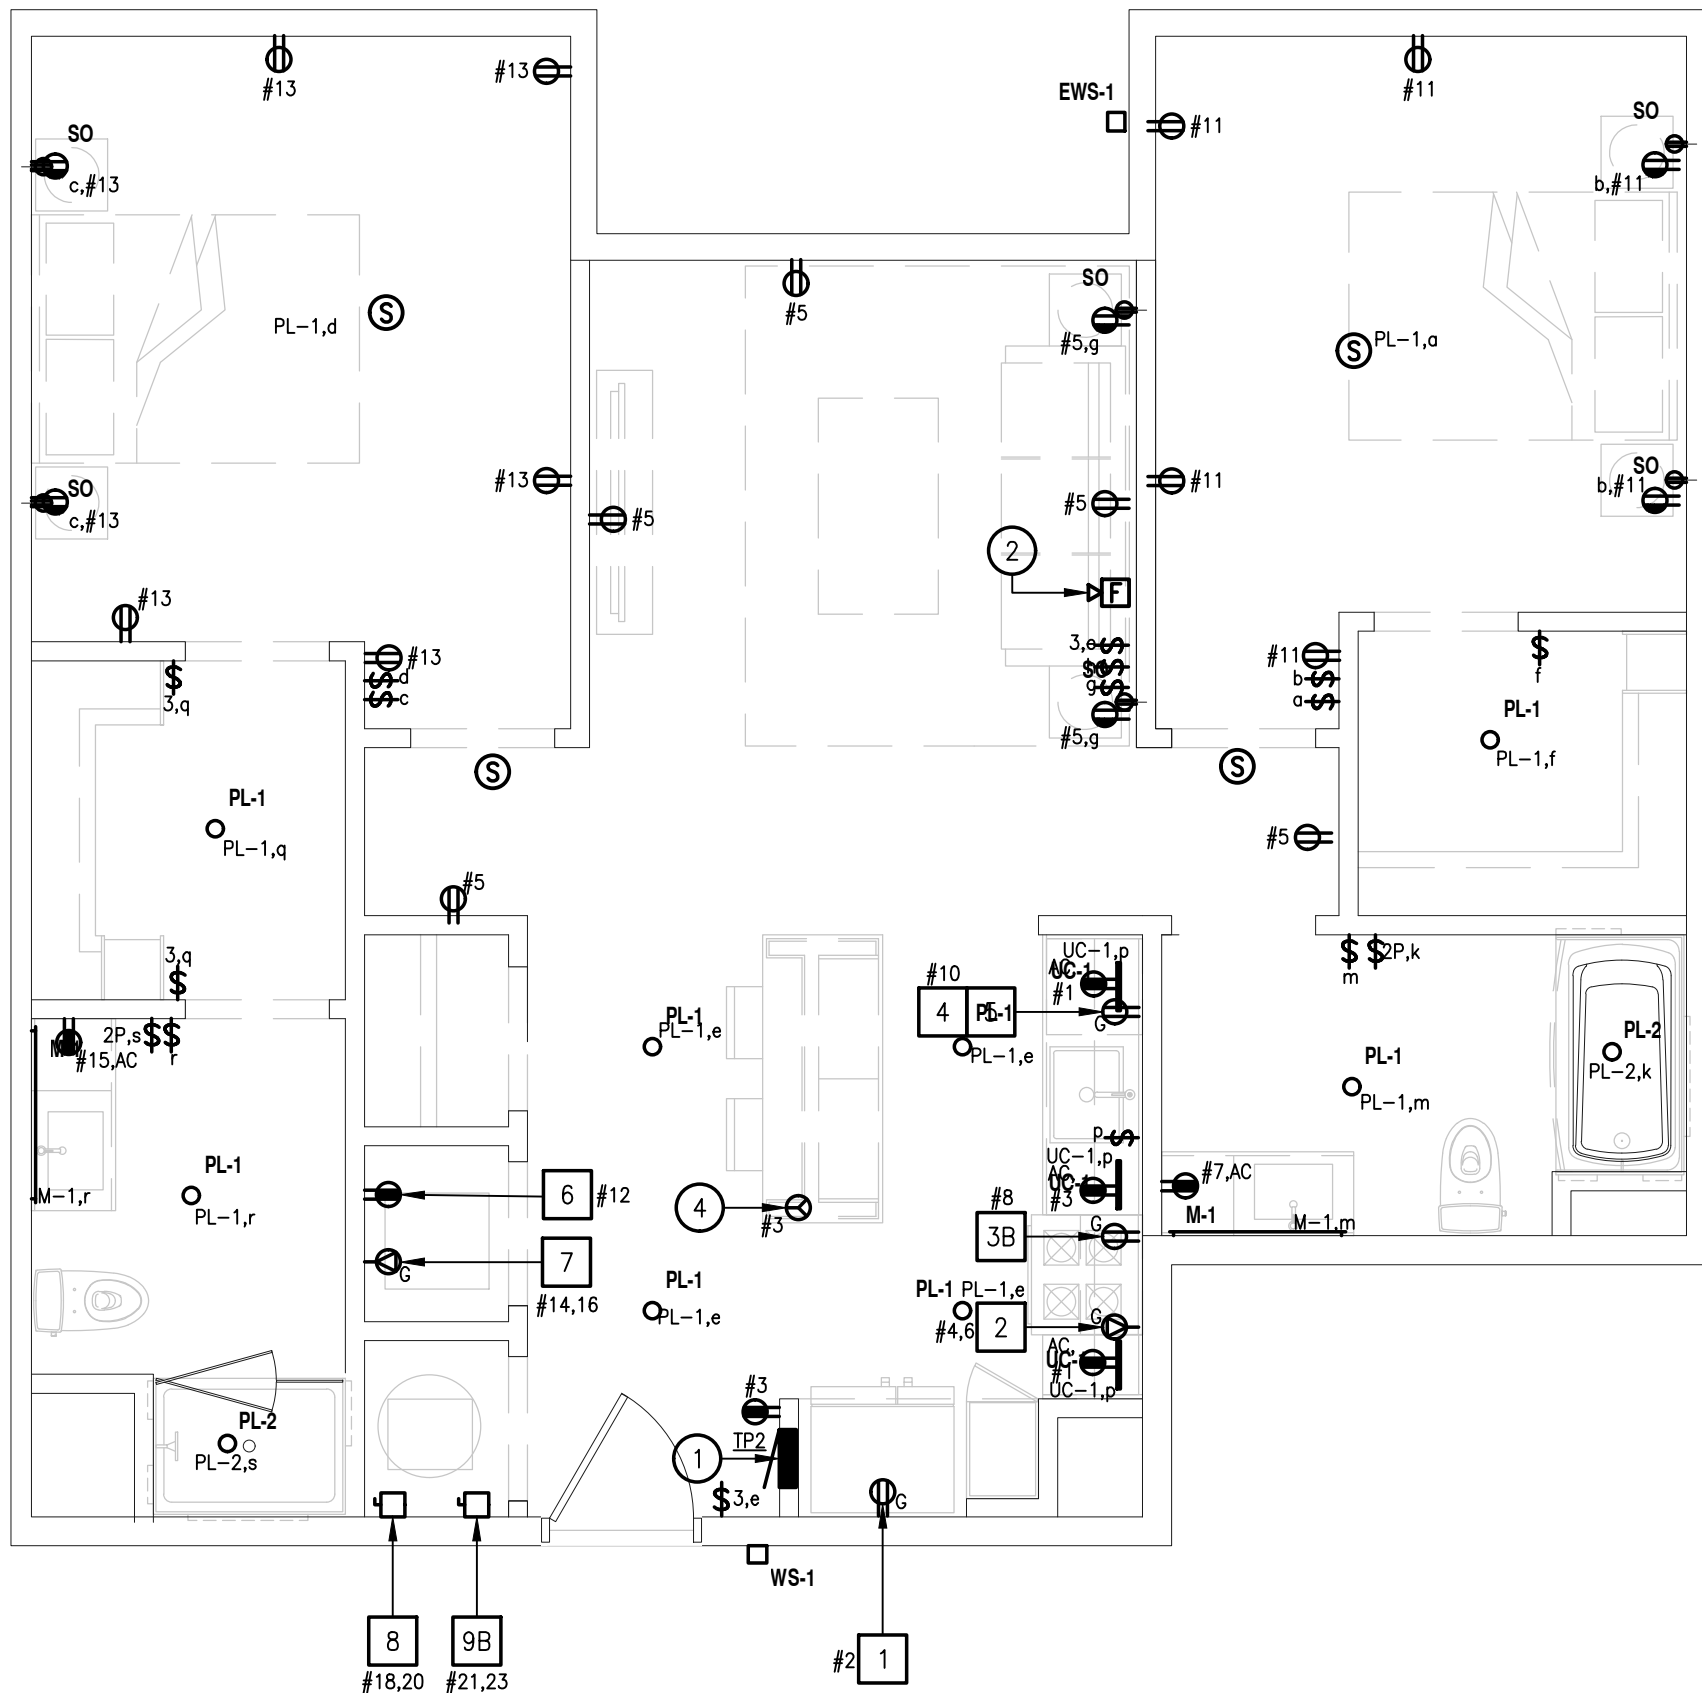

6
A3.01B
BUILDING 2
UNIT TYPE B1.4 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

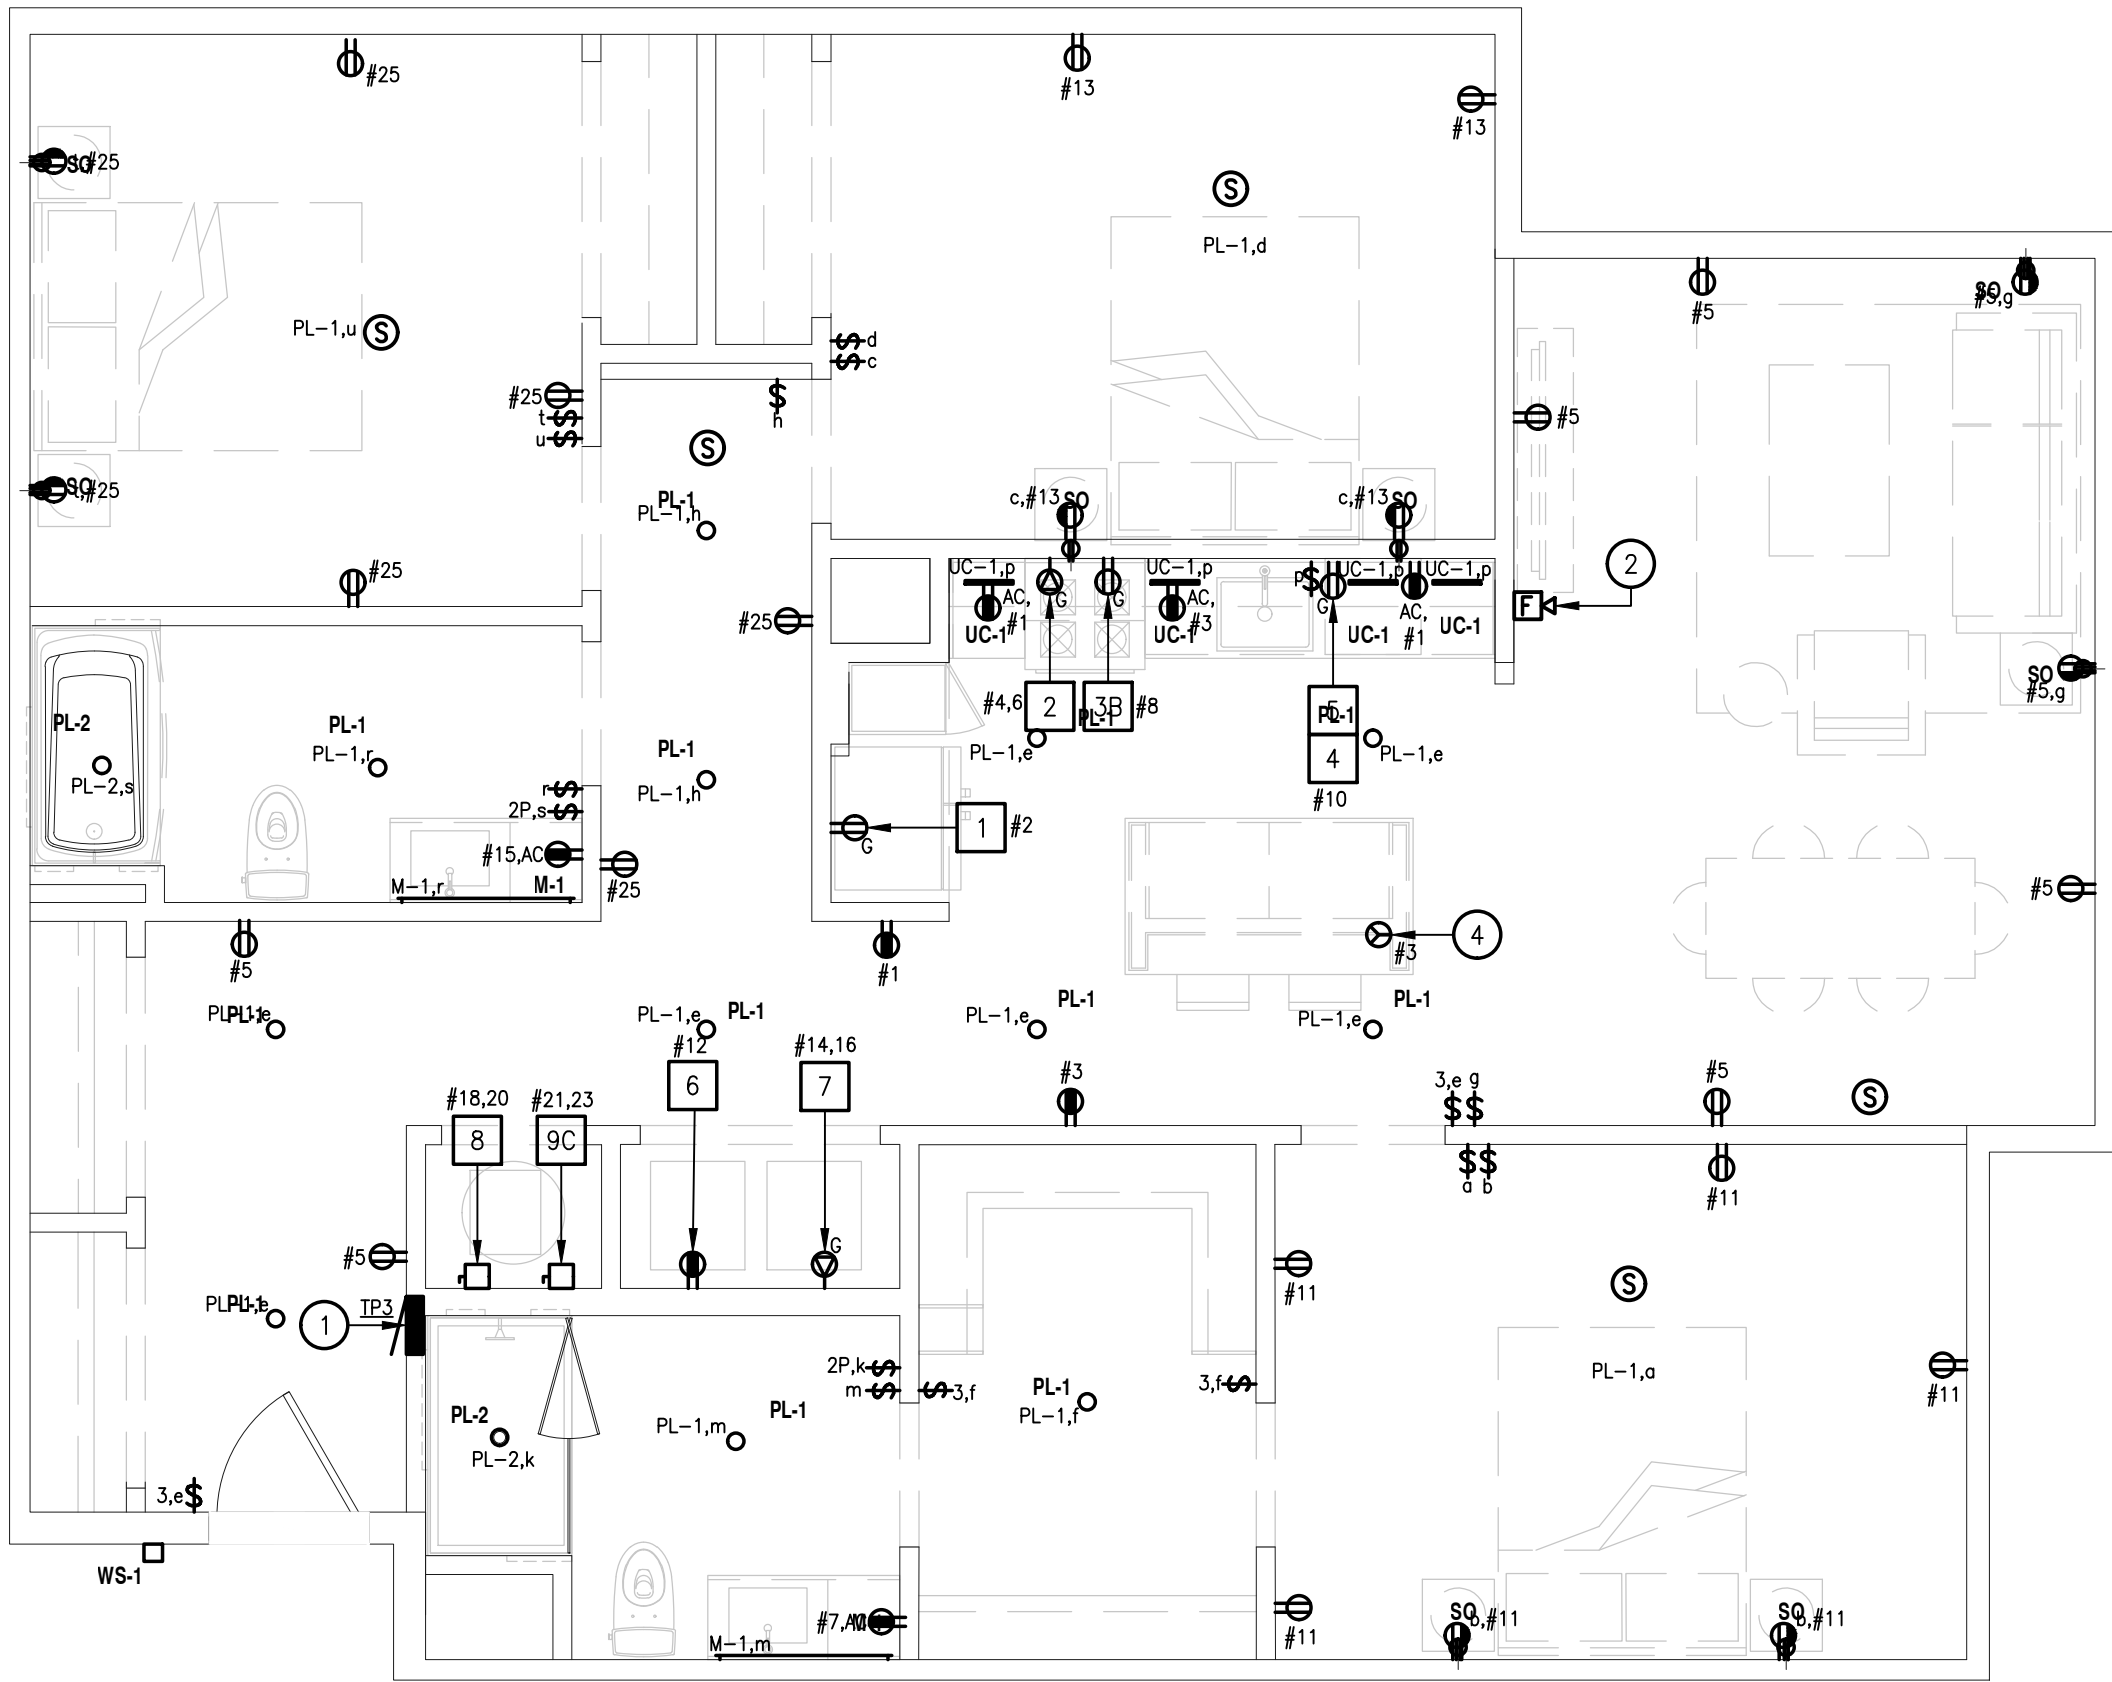

4
A3.02B
BUILDING 2
UNIT TYPE C2 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

- GENERAL DWELLING UNIT ELECTRICAL PLAN NOTES
- ALL LIGHT FIXTURES, CEILING FANS, AND BATHROOM/KITCHEN EXHAUST FANS SHALL BE CONNECTED TO CIRCUIT #9 IN RESPECTIVE UNIT LOAD CENTER UNLESS SHOWN OTHERWISE.
 - REFER TO SHEET #E3-00 FOR ALL UNIT DETAILS, INCLUDING APPLIANCE SCHEDULES.
 - FLOOR RECEPTACLES MAY BE INSTALLED IN LIEU OF WALL RECEPTACLES SHOULD WINDOWS/GLAZING OR SLIDING DOOR RECESSED POCKETS INTERFERE WITH WALL MOUNTING AT ANY LOCATION WITHIN THE DWELLING UNIT. FLOOR RECEPTACLES SHALL BE INSTALLED WITHIN 18" OF WINDOWS/WALLS OR PER NEC #210.52(A)(3).

CODED NOTES

- LOCATION OF NEW TENANT CIRCUIT BREAKER LOAD CENTER. REFER TO TYPICAL UNIT CIRCUIT BREAKER PANEL SCHEDULE ON SHEET #E3-00 FOR ADDITIONAL INFORMATION. ALL LIVING AREA BRANCH CIRCUITS SHALL BE PROVIDED WITH ARC-FAULT CIRCUIT INTERRUPTER PROTECTION IN ACCORDANCE WITH N.E.C. ARTICLE #210.12(A).
- THIS FIRE ALARM DEVICE SHALL BE CONNECTED TO THE BASE BUILDING FIRE ALARM SYSTEM. VERIFY FINAL LOCATION WITH A.H.J. AND FIRE MARSHAL.
- LOCATION OF STRUCTURED MEDIA ENCLOSURE "SME". REFER TO DETAIL ON DRAWING #E3-00 FOR ADDITIONAL INFORMATION. PROVIDE POWER FROM NEAREST LIVING AREA BRANCH CIRCUIT.
- COORDINATE FINAL LOCATION OF JUNCTION BOX FOR FUTURE KITCHEN COUNTER RECEPTACLE WITH G.C. AND OWNERSHIP. ROUTE AN EMPTY 1" C. WITH PULLWIRE TO NEAREST SMALL APPLIANCE BRANCH CIRCUIT (#1 OR #3) FOR FUTURE WIRING. THE FINAL INSTALLATION SHALL BE IN COMPLIANCE WITH NEC SECTION 210.52(C)(3).

NOT FOR
CONSTRUCTION

Issue: SCHEMATIC DESIGN
Date: 01.07.26
By: BAC

Issue: DESIGN DEVELOPMENT
Date: 03.05.26
By: BAC

whs
engineering

2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505


OSU
AIRPORT WEST
BUILDING B

3455 W. Dublin Granville Rd,
Columbus OH, 43235


Drawing Title
TYPICAL DWELLING UNIT
ELECTRICAL PLANS

Date 03.05.2026	Project Number 24-065
Drawn By DJS	Showing Number
Checked by KDS	
Approved GSS	


E3.01B

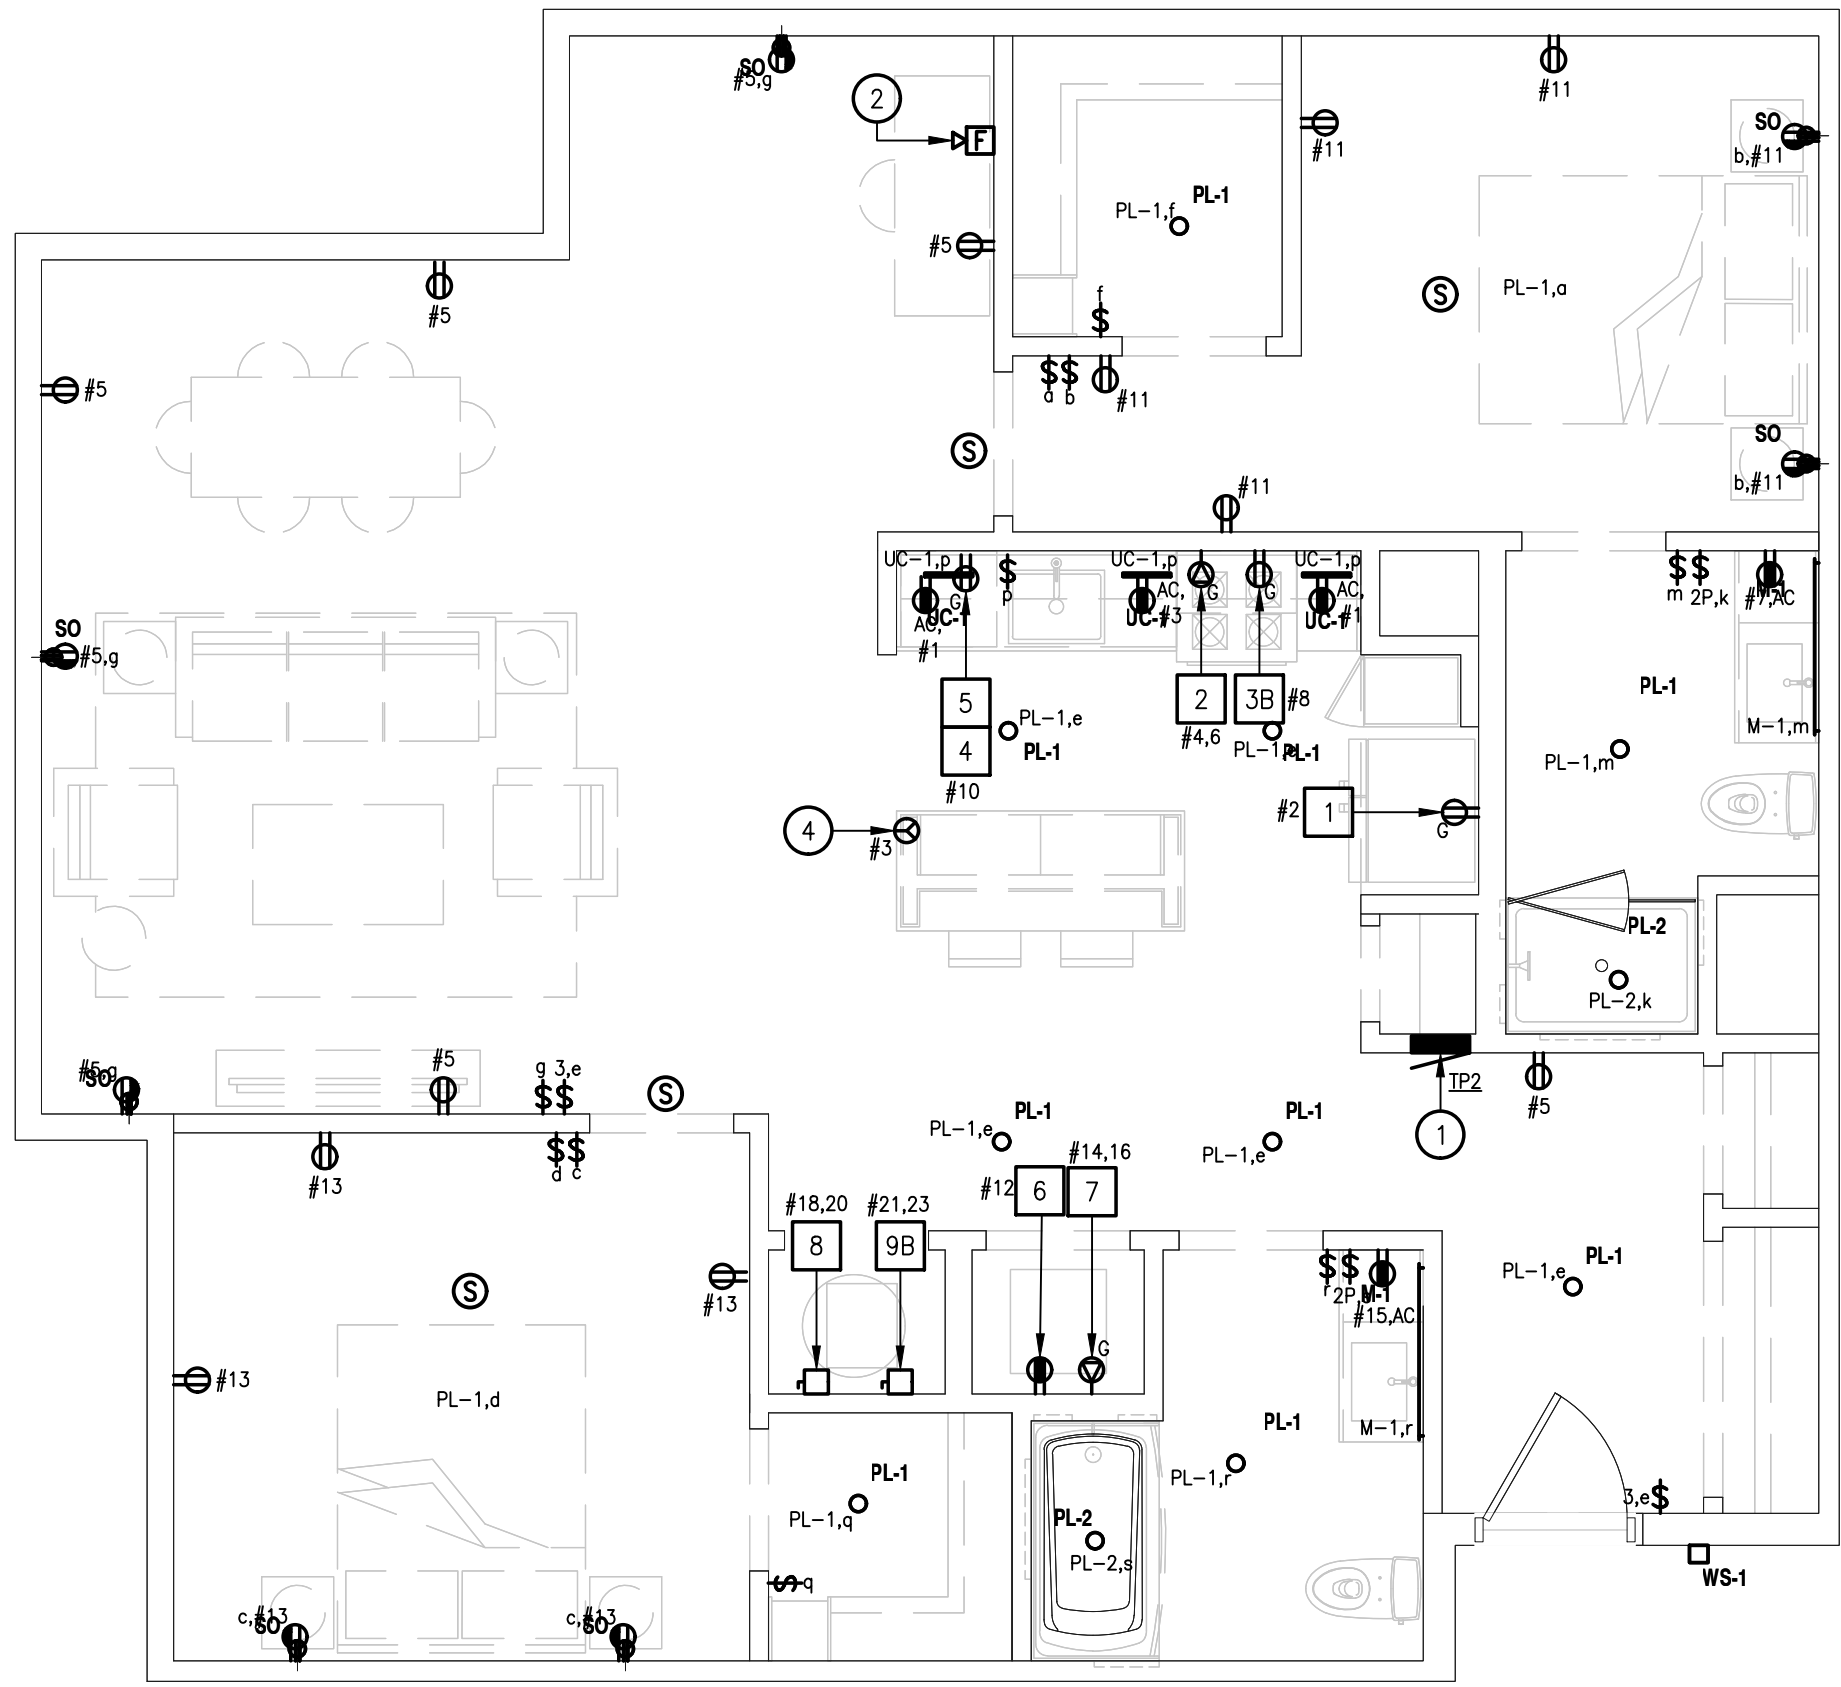


1
A3.02B
BUILDING 2
UNIT TYPE BD1 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

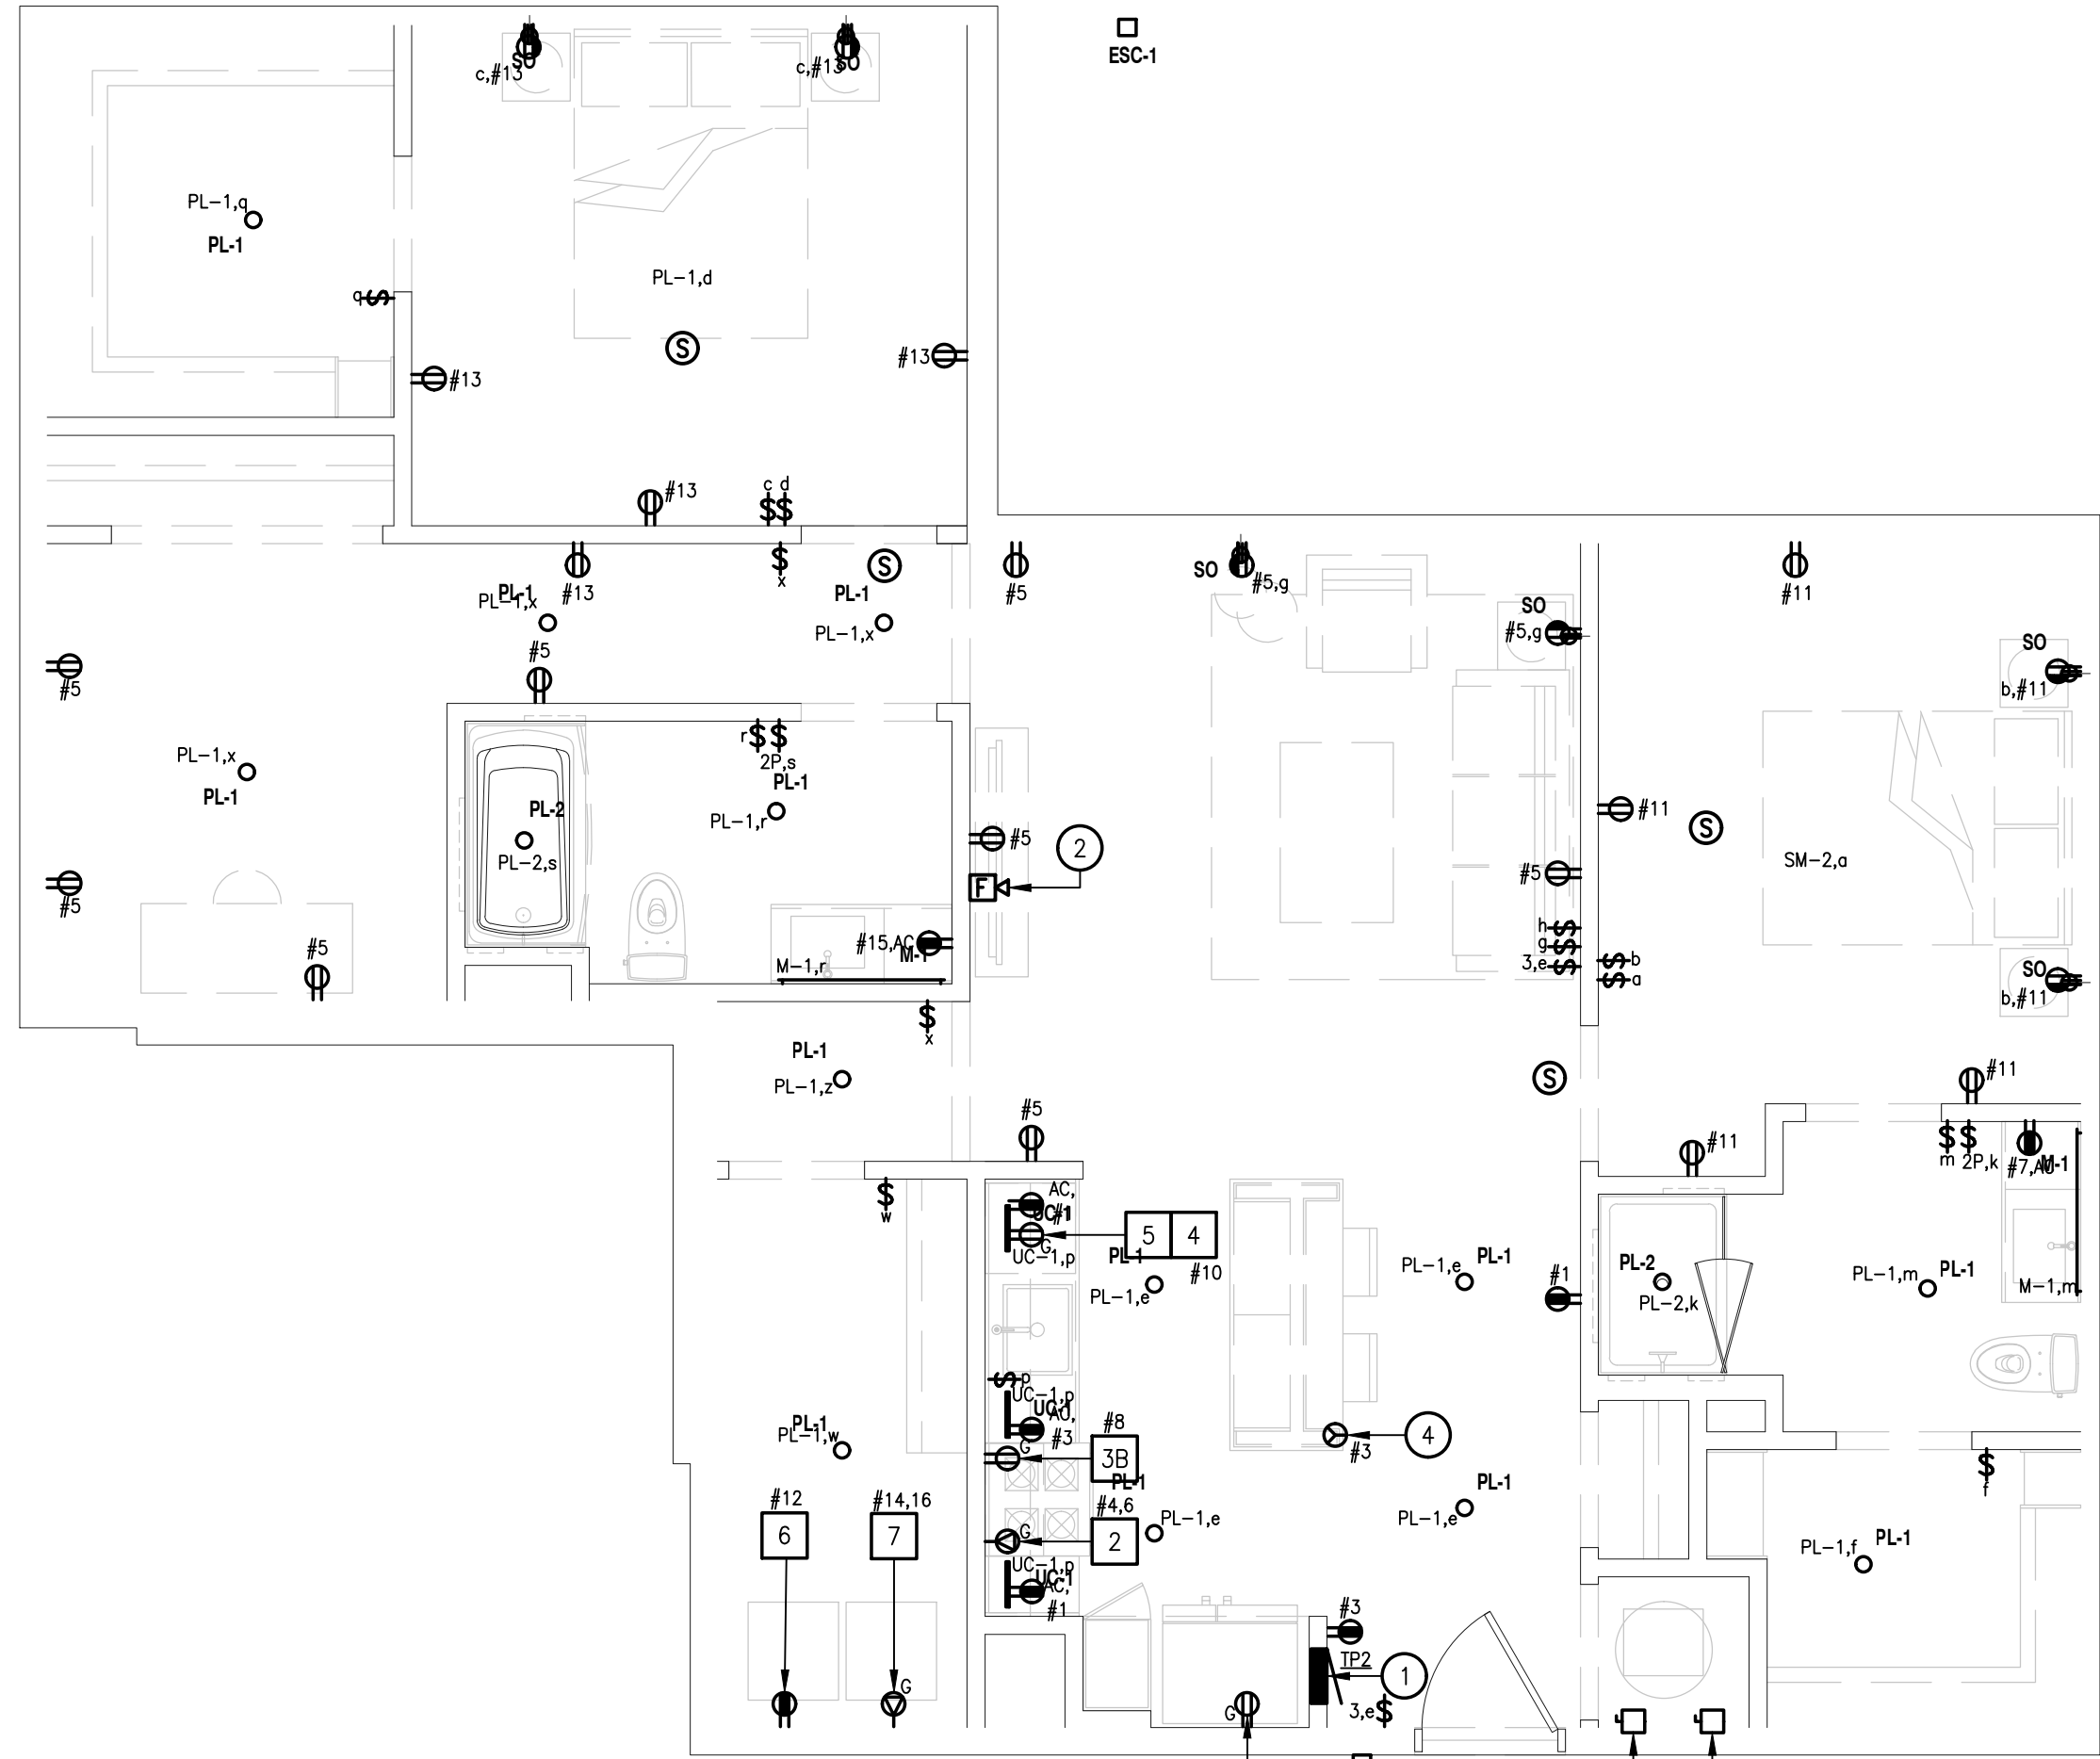


2
A3.02B
BUILDING 2
UNIT TYPE BD3.1 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

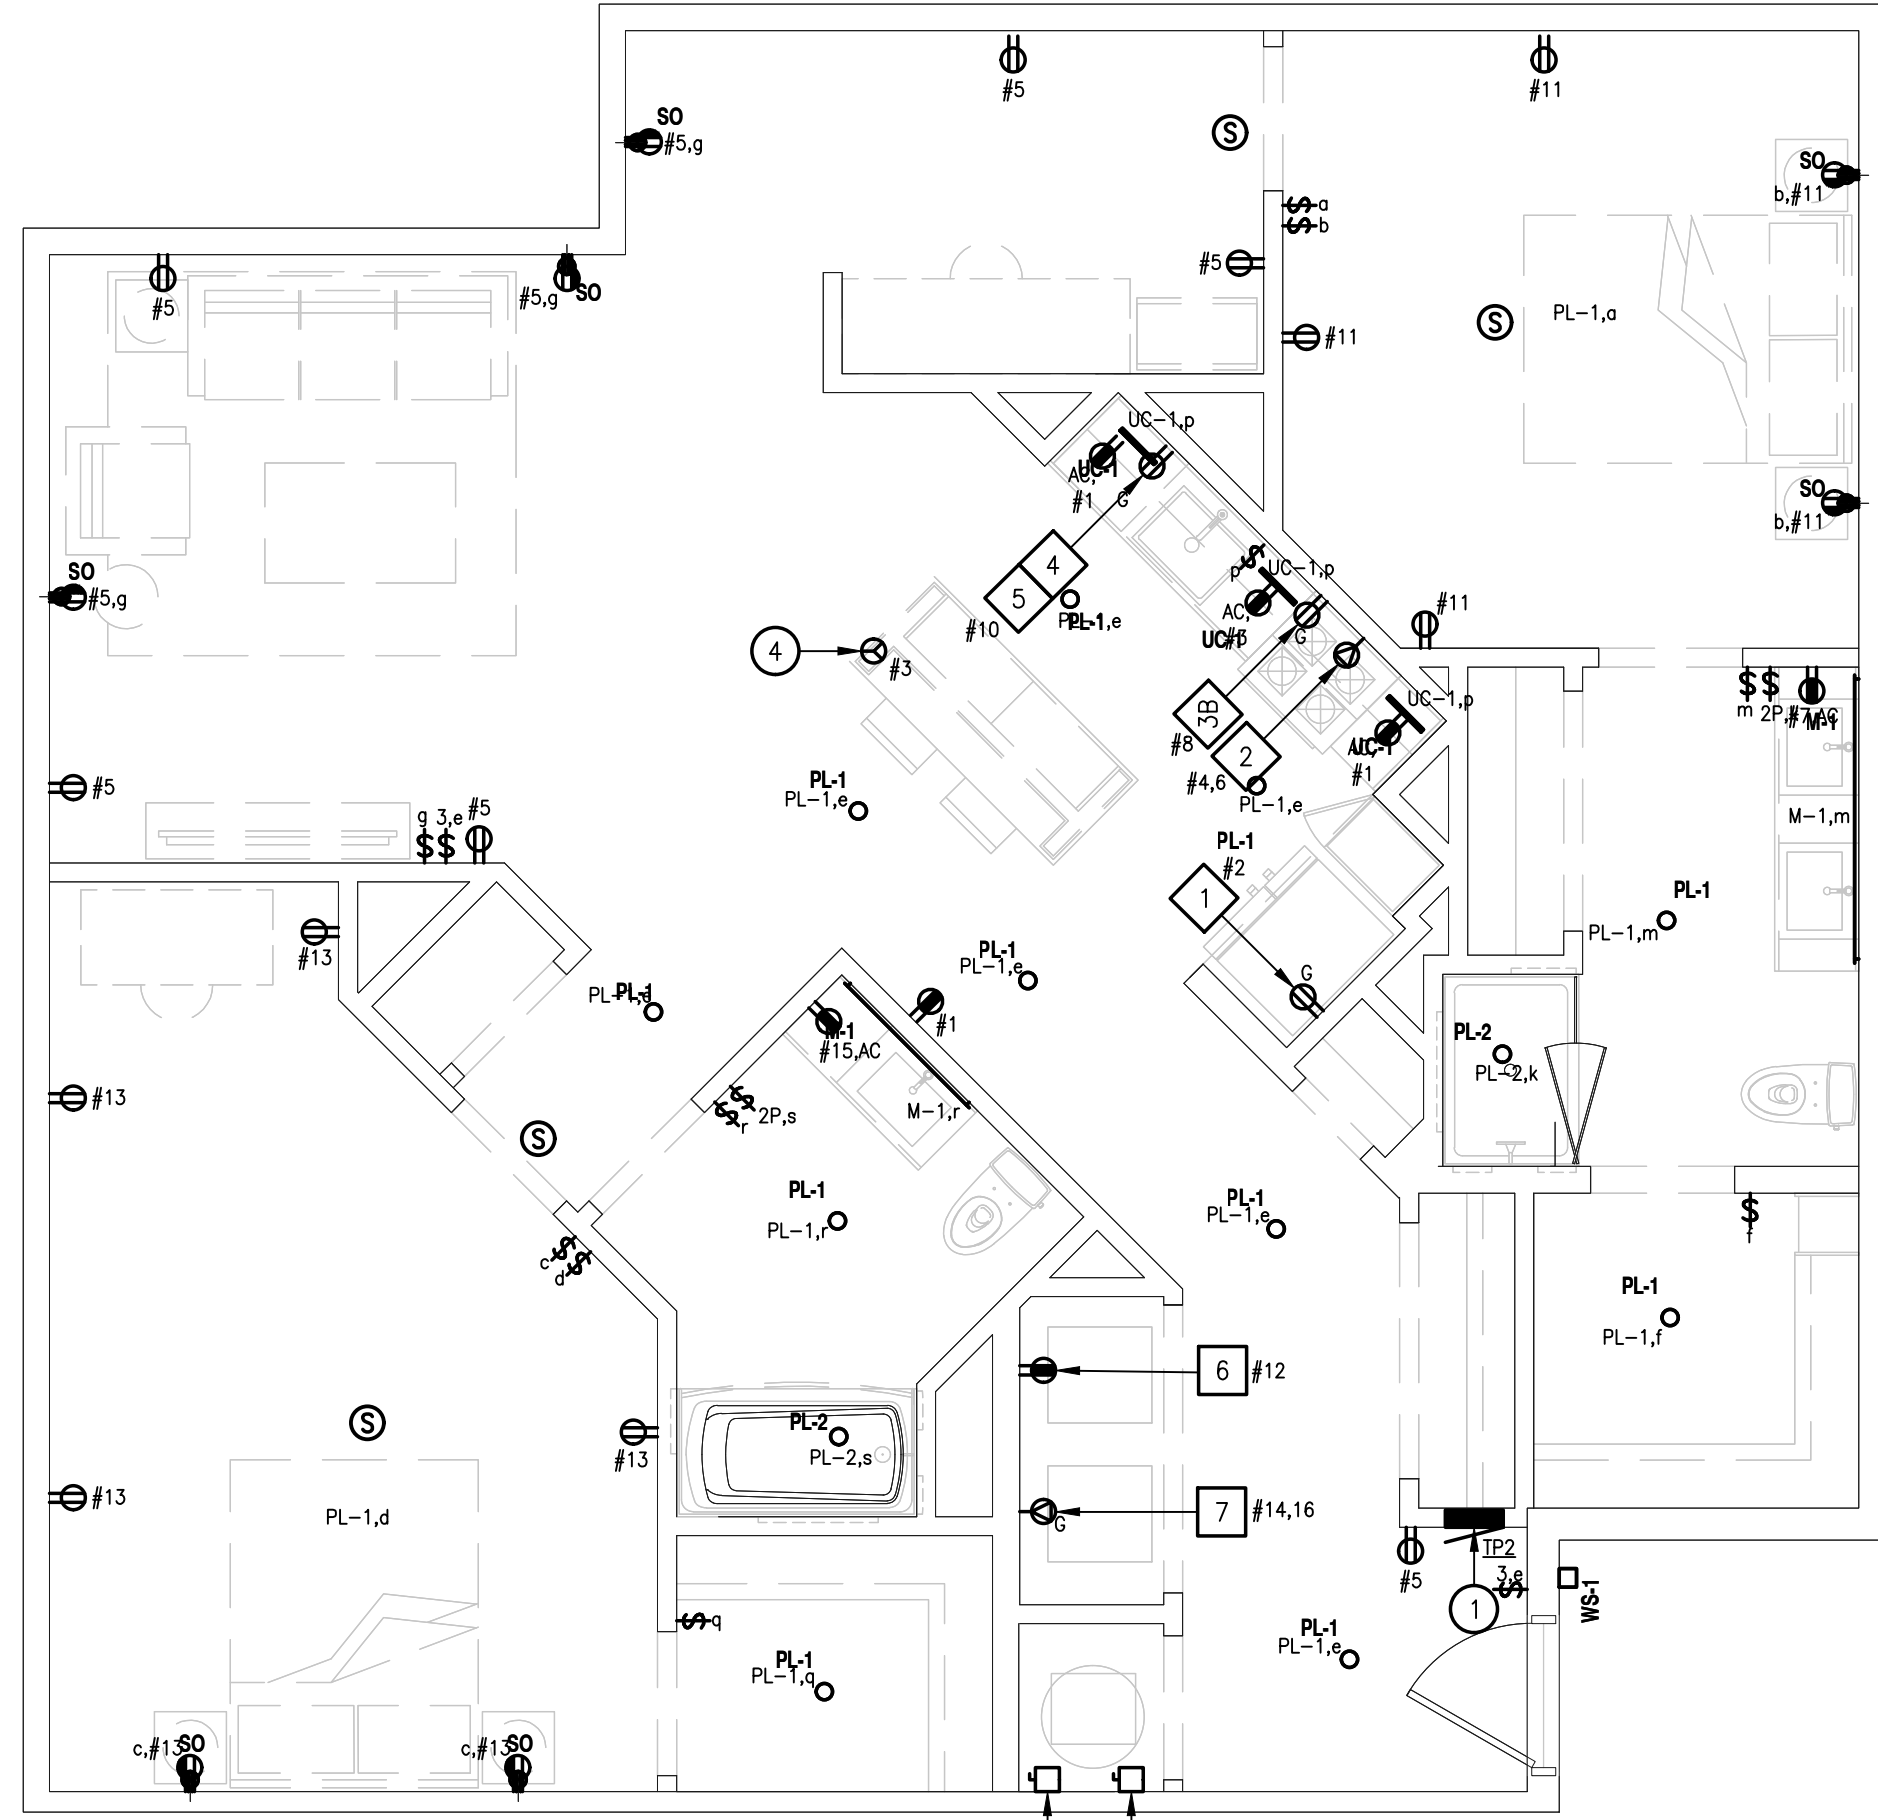

3
A3.02B
BUILDING 2
UNIT TYPE BD4 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

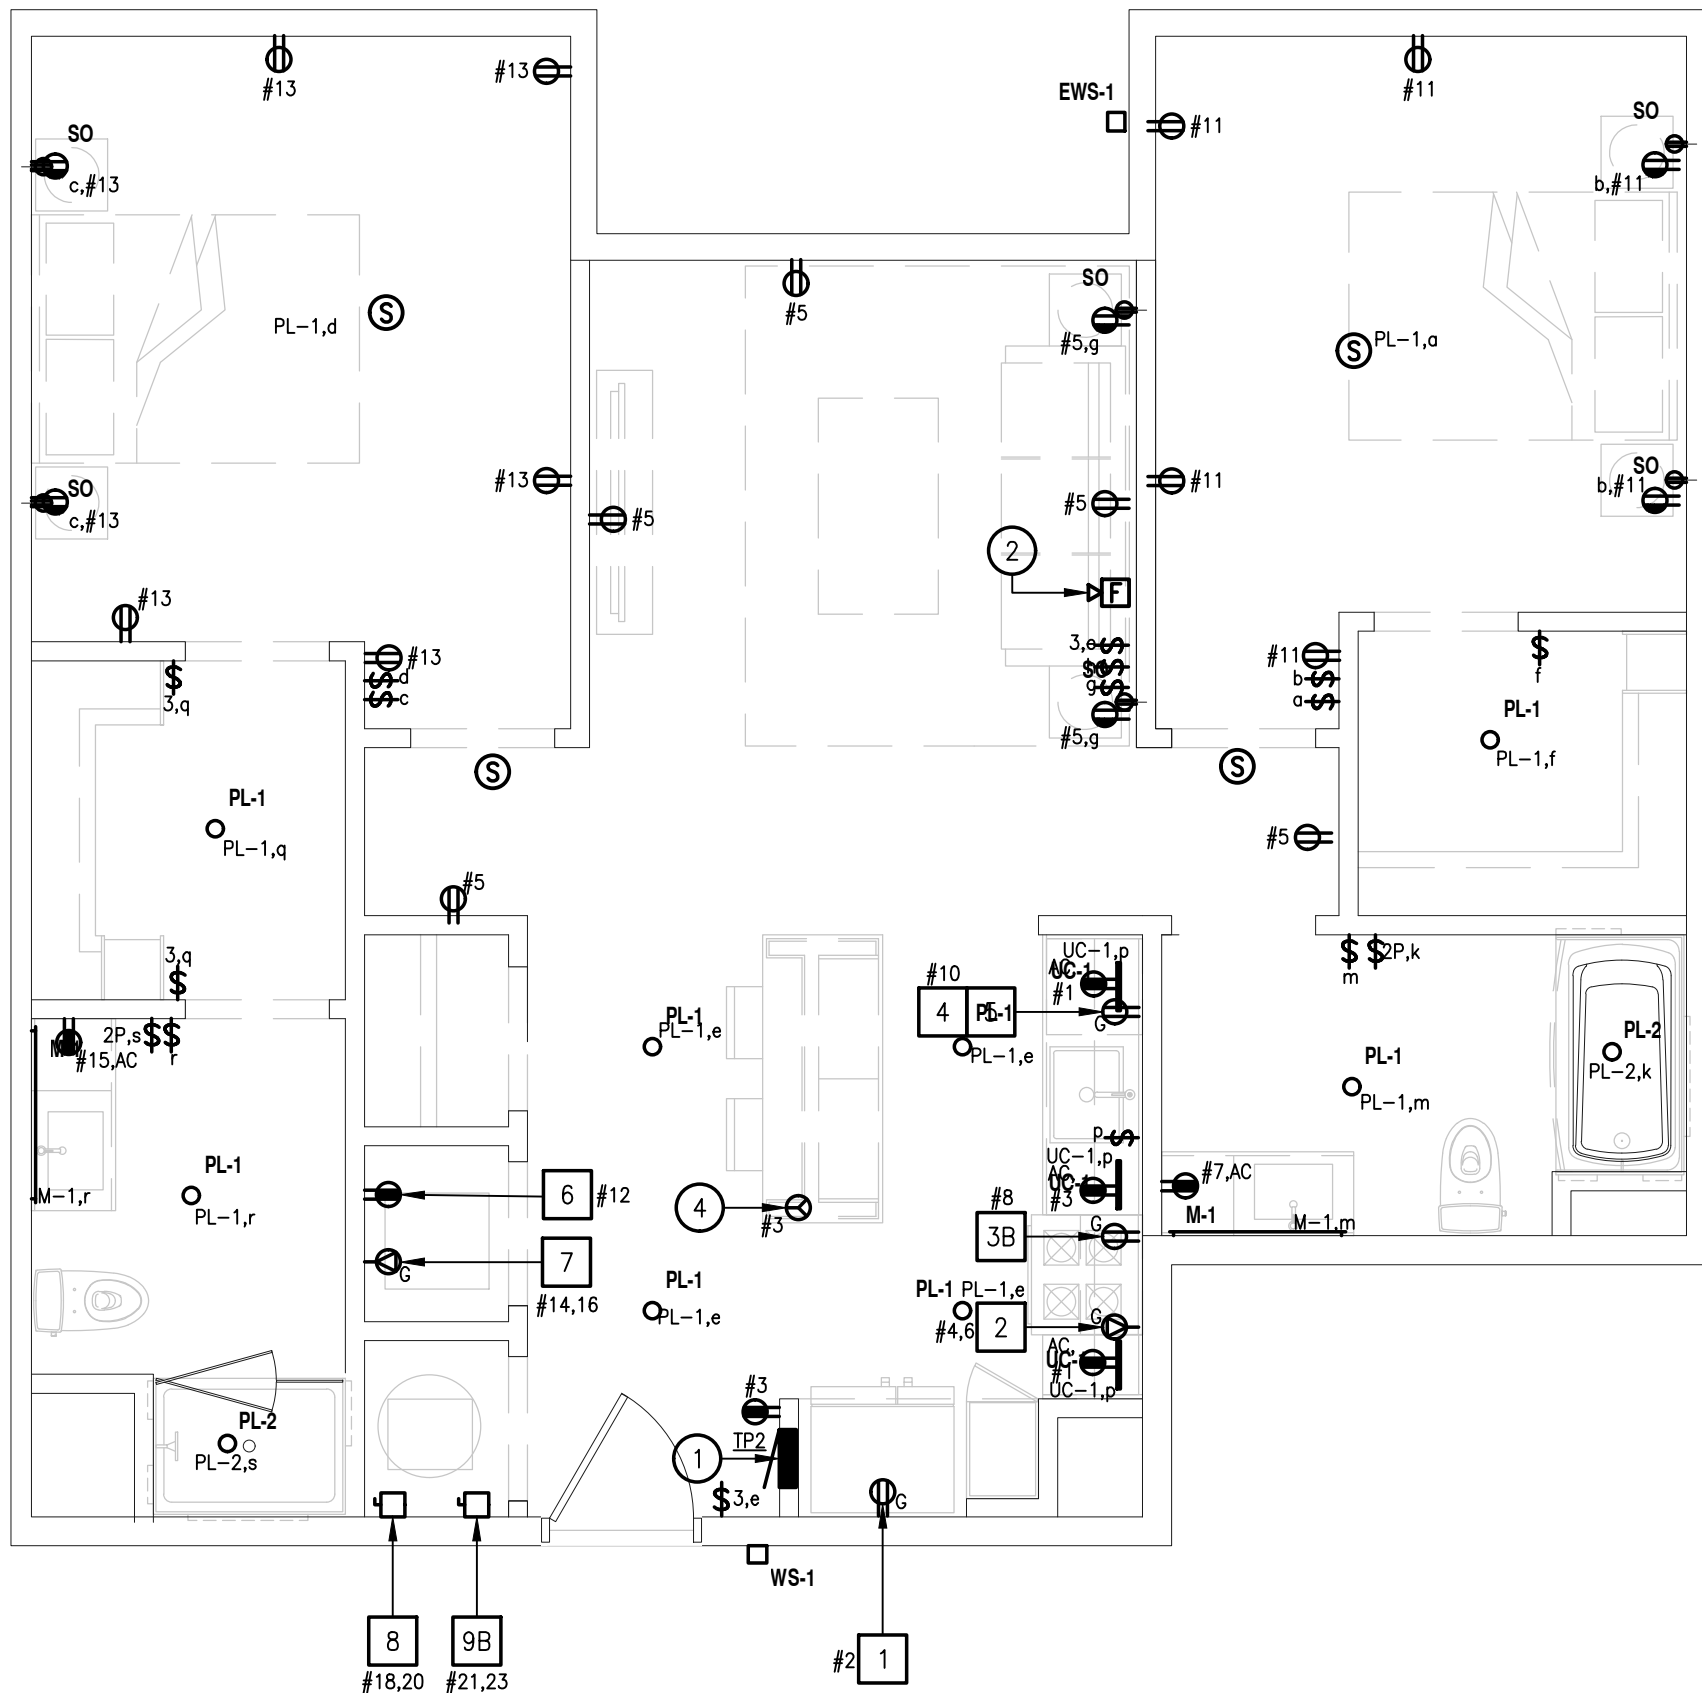

6
A3.01B
BUILDING 2
UNIT TYPE B1.4 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

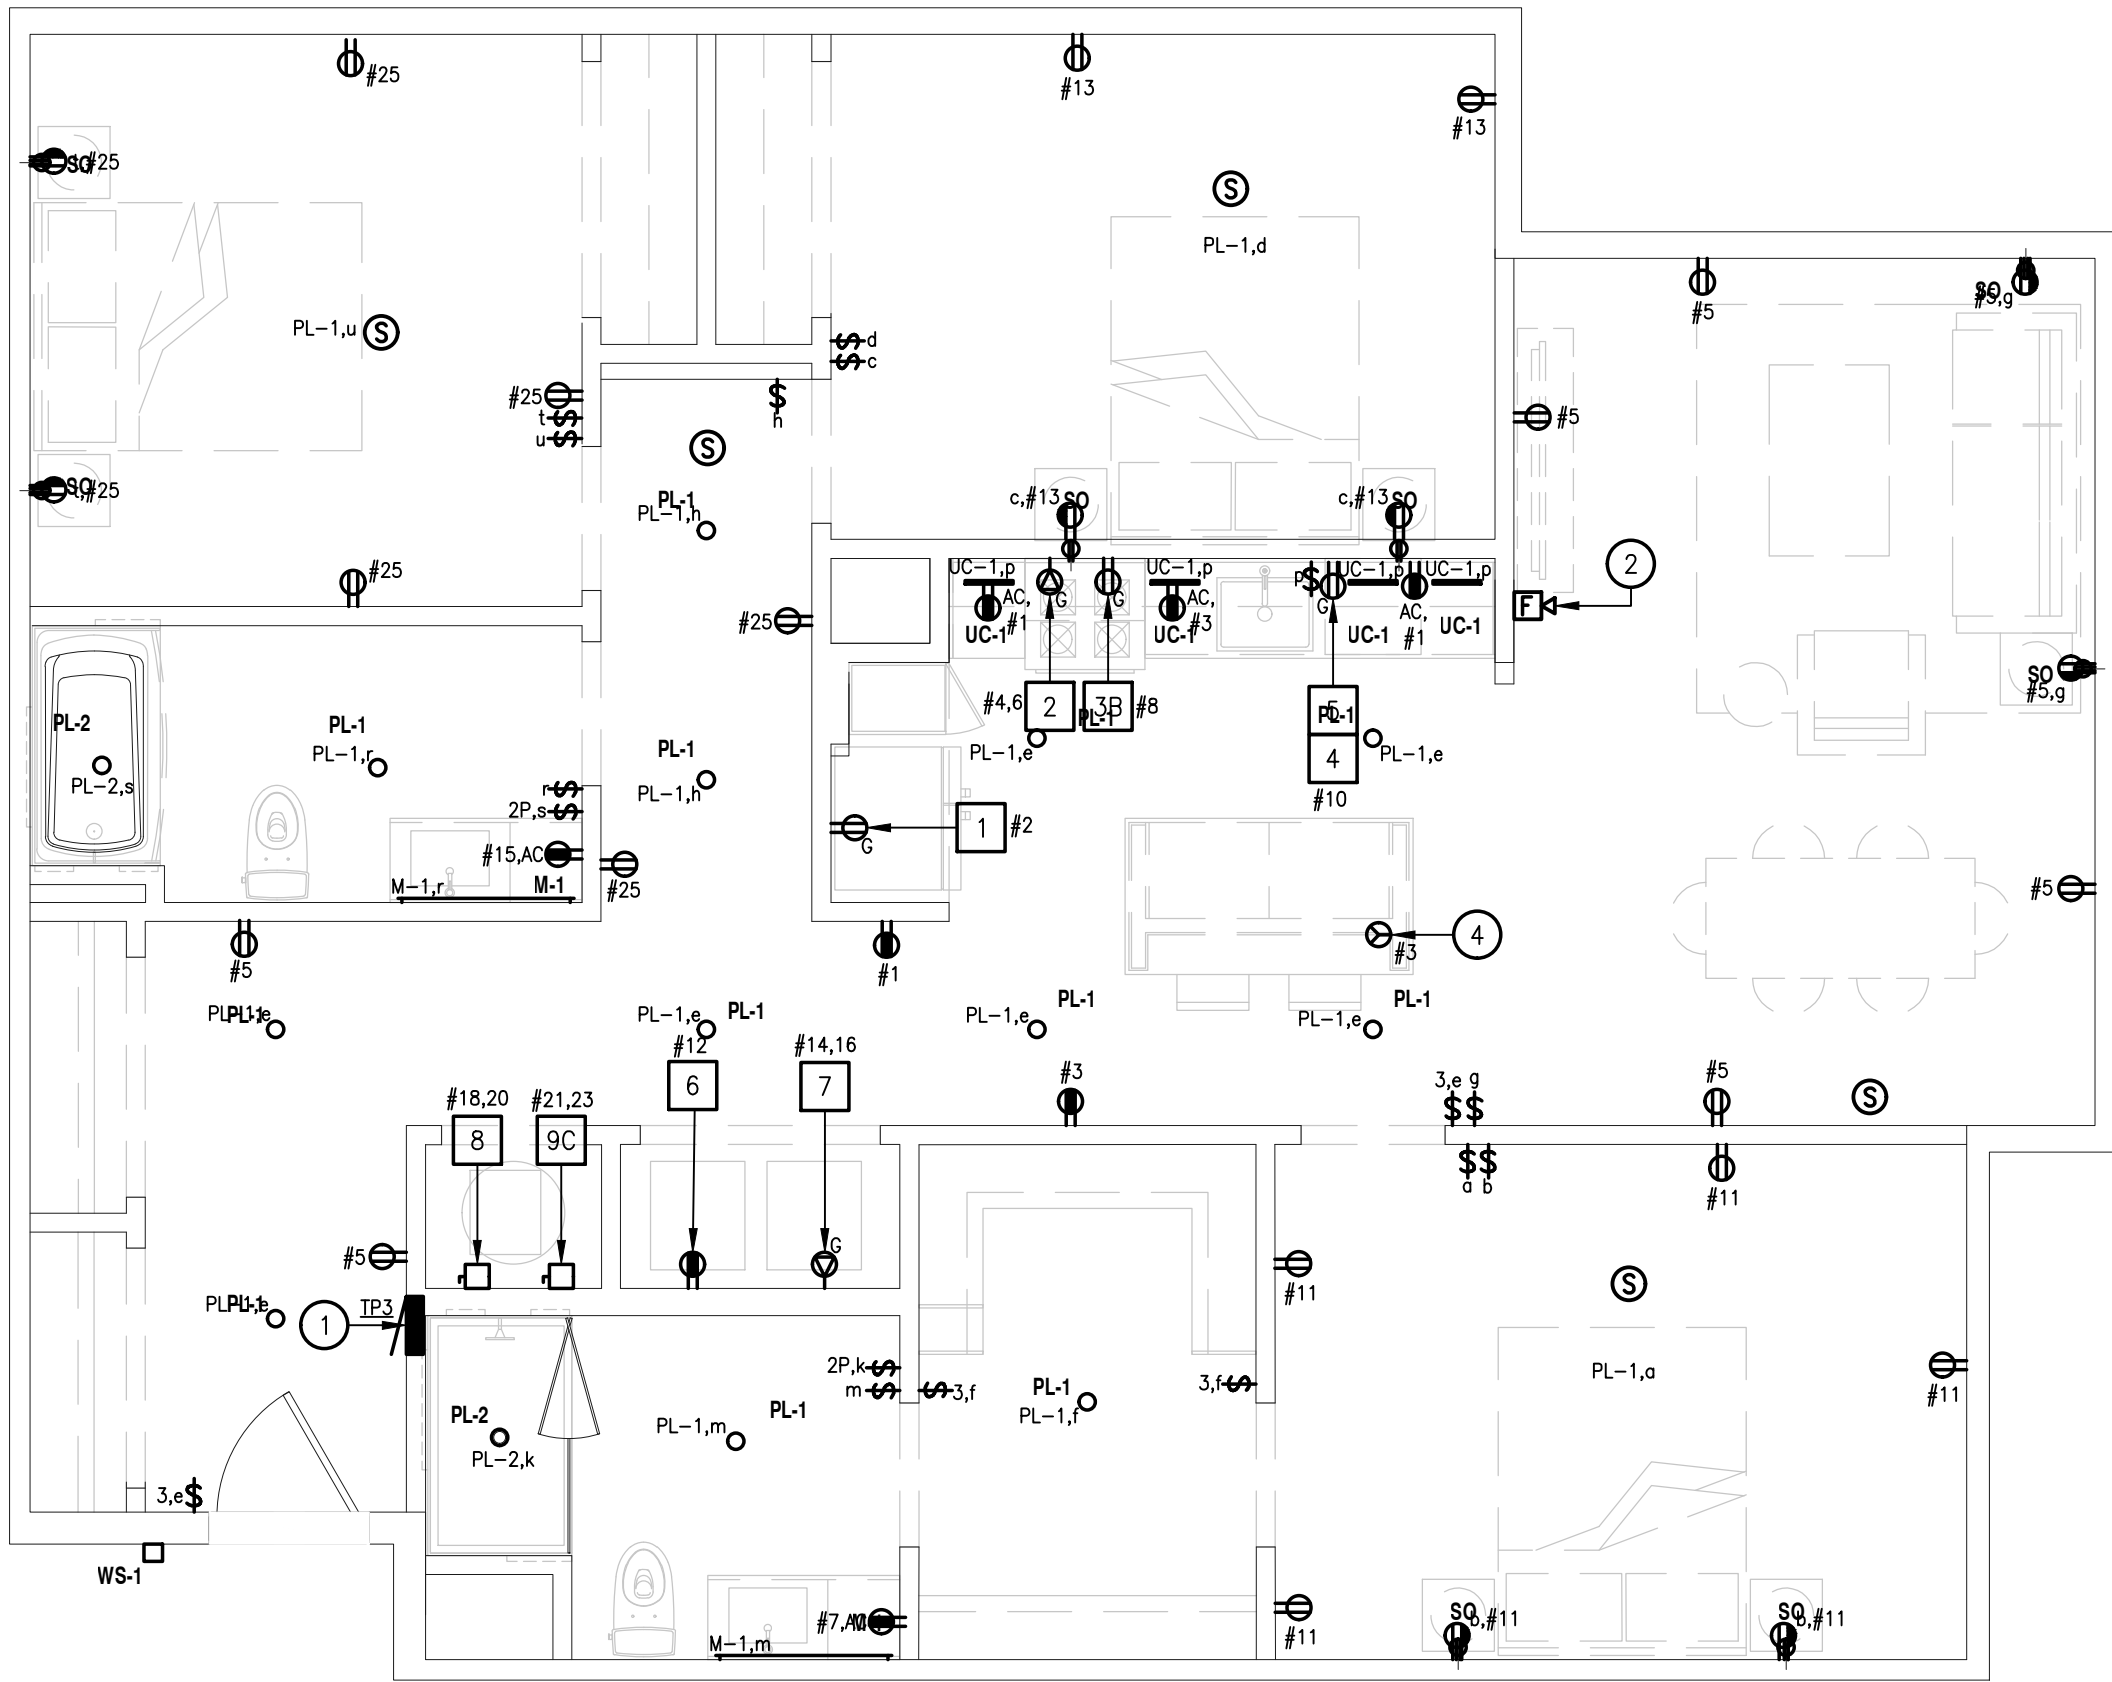

4
A3.02B
BUILDING 2
UNIT TYPE C2 ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

- GENERAL DWELLING UNIT ELECTRICAL PLAN NOTES
- ALL LIGHT FIXTURES, CEILING FANS, AND BATHROOM/KITCHEN EXHAUST FANS SHALL BE CONNECTED TO CIRCUIT #9 IN RESPECTIVE UNIT LOAD CENTER UNLESS SHOWN OTHERWISE.
 - REFER TO SHEET #E3-00 FOR ALL UNIT DETAILS, INCLUDING APPLIANCE SCHEDULES.
 - FLOOR RECEPTACLES MAY BE INSTALLED IN LIEU OF WALL RECEPTACLES SHOULD WINDOWS/GLAZING OR SLIDING DOOR RECESSED POCKETS INTERFERE WITH WALL MOUNTING AT ANY LOCATION WITHIN THE DWELLING UNIT. FLOOR RECEPTACLES SHALL BE INSTALLED WITHIN 18" OF WINDOWS/WALLS OR PER NEC #210.52(A)(3).

CODED NOTES

- LOCATION OF NEW TENANT CIRCUIT BREAKER LOAD CENTER. REFER TO TYPICAL UNIT CIRCUIT BREAKER PANEL SCHEDULE ON SHEET #E3-00 FOR ADDITIONAL INFORMATION. ALL LIVING AREA BRANCH CIRCUITS SHALL BE PROVIDED WITH ARC-FAULT CIRCUIT INTERRUPTER PROTECTION IN ACCORDANCE WITH N.E.C. ARTICLE #210.12(A).
- THIS FIRE ALARM DEVICE SHALL BE CONNECTED TO THE BASE BUILDING FIRE ALARM SYSTEM. VERIFY FINAL LOCATION WITH A.H.J. AND FIRE MARSHAL.
- LOCATION OF STRUCTURED MEDIA ENCLOSURE "SME". REFER TO DETAIL ON DRAWING #E3-00 FOR ADDITIONAL INFORMATION. PROVIDE POWER FROM NEAREST LIVING AREA BRANCH CIRCUIT.
- COORDINATE FINAL LOCATION OF JUNCTION BOX FOR FUTURE KITCHEN COUNTER RECEPTACLE WITH G.C. AND OWNERSHIP. ROUTE AN EMPTY 1" C. WITH PULLWIRE TO NEAREST SMALL APPLIANCE BRANCH CIRCUIT (#1 OR #3) FOR FUTURE WIRING. THE FINAL INSTALLATION SHALL BE IN COMPLIANCE WITH NEC SECTION 210.52(C)(3).

Seal

NOT FOR
CONSTRUCTION

Issue: Date: By:
SCHEMATIC DESIGN 01.07.26 BAC
DESIGN DEVELOPMENT 03.05.26 BAC

whs
engineering
2012 West 25th Street, Suite 900
Cleveland, OH 44113
Phone: 216 227 8505

**OSU
AIRPORT WEST
BUILDING B**

**3455 W. Dublin Granville Rd,
Columbus OH, 43235**

Drawing Title
**TYPICAL DWELLING UNIT
ELECTRICAL PLANS**

Date: 03.05.2026	Project Number: 24-065
Drawn By: DJS	Checking Engineer: GSS
Checked By: KDS	
Approved: GSS	

E3.02B